



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

136 MHz LC Band Pass Filter

Part Number: AE136B5466



Electrical Specifications

Center Frequency: 136 MHz
1 dB Passband: 136.06-136.44 MHz
Insertion Loss: 1.5 dB Max.
Return Loss: 14.0dB Min.
Rejection: 30dB Min @ 129 MHz


Mechanical

Mounting Method: Threaded Holes
Connector Type: SMA(F)
Dimensions: 4.0" X 1.25" x 0.75".

Environmental

Operating Temperature: -25°C to +70°C
Storage Temperature: -40°C to +90°C
Shock: 10 G. 11ms
Vibration: 10 G. 5 to 200Hz

Outline Drawing:

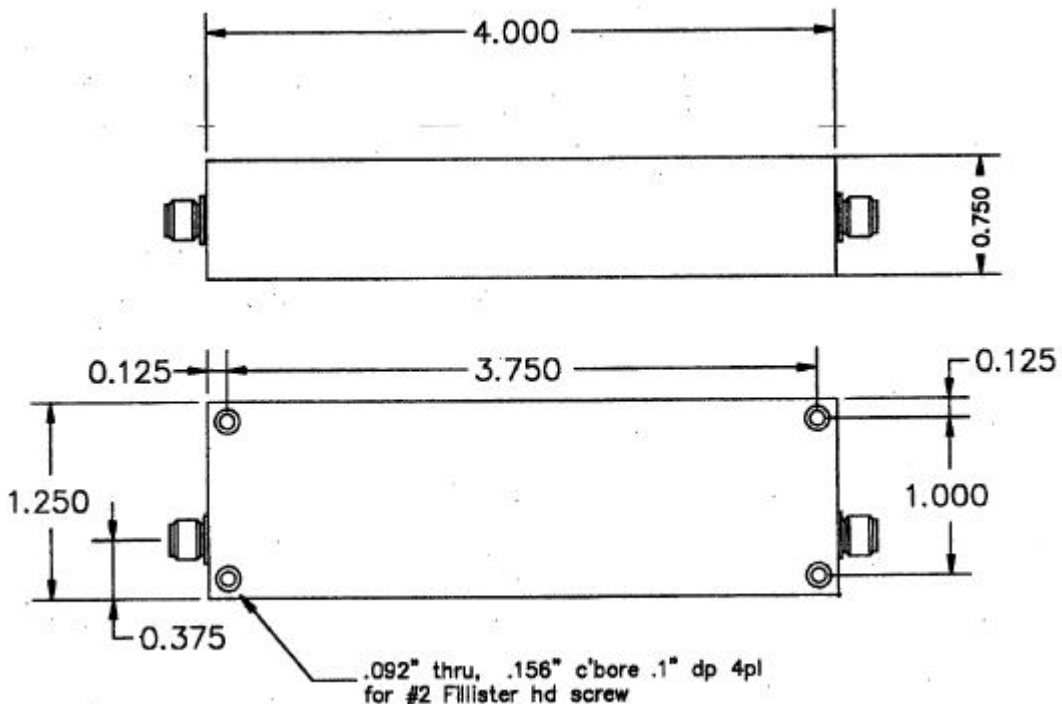

Tolerance: +/-0.01 inches [+/-0.3mm] Angles: +/-1 Deg.

*Tolerance as shown unless otherwise specified in the datasheet electrical specification tables above.

*When max dimensions are called out the above tolerances do not apply as long as it is under the max call out.

70 Outwater Lane Phone: (973) 772-4242
Garfield, NJ 07026 Fax : (973) 321-3941

Email: sales@anatechelectronics.com
Web: www.anatechelectronics.com




ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

136 MHz LC Band Pass Filter

Part Number: AE136B5466



Simulation Plot:

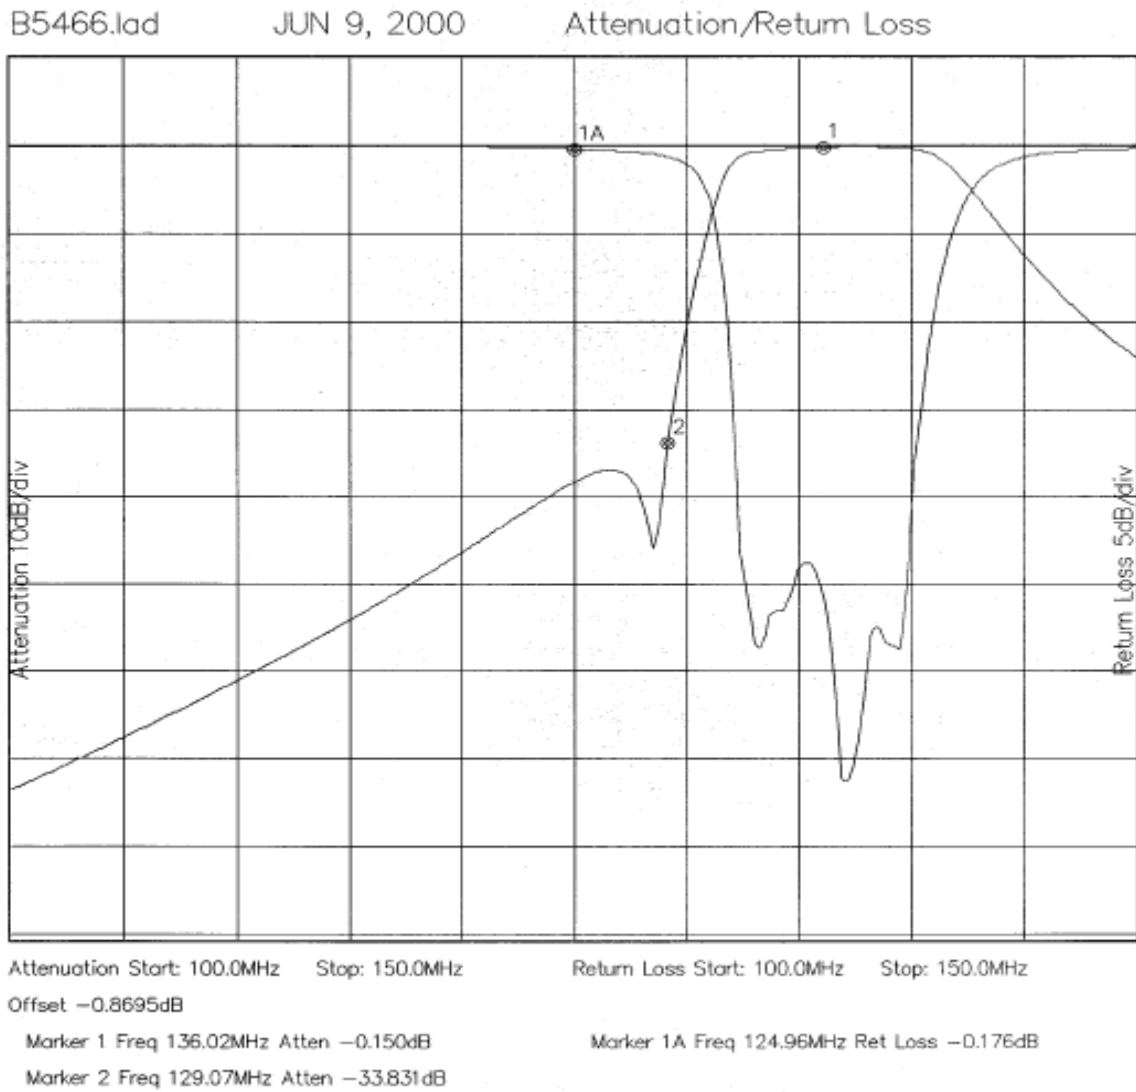

Note: This is a simulated response plot. Actual performance might differ.