



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

915 MHz Cavity Band Pass Filter

Part Number: AE915B11737



Electrical Specifications

Center Frequency: 915 MHz
Passband: 902-928 MHz
Insertion Loss 1: 1.0 dB Max @ 902 MHz
Insertion Loss 2: ~ 3.0 dB @ 928 MHz
Return Loss: 14.0 dB Min.
Rejection1: 40 dB Min @ 894 MHz
Rejection2: 35 dB Min @ 929.5-930.5 MHz
Power Handling: 50 W CW
Input / output Impedance: 50 Ohms


Mechanical

Mounting Method: Threaded Holes
Connector Type: SMA(F)
Dimensions: 7.27" X 2.81" x 2.29"
Dimensions: 184.5 X 71.2 X 58 mm

Environmental

Operating Temperature: -20°C to +60°C
Storage Temperature: -45°C to +85°C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200Hz

Outline Drawing:

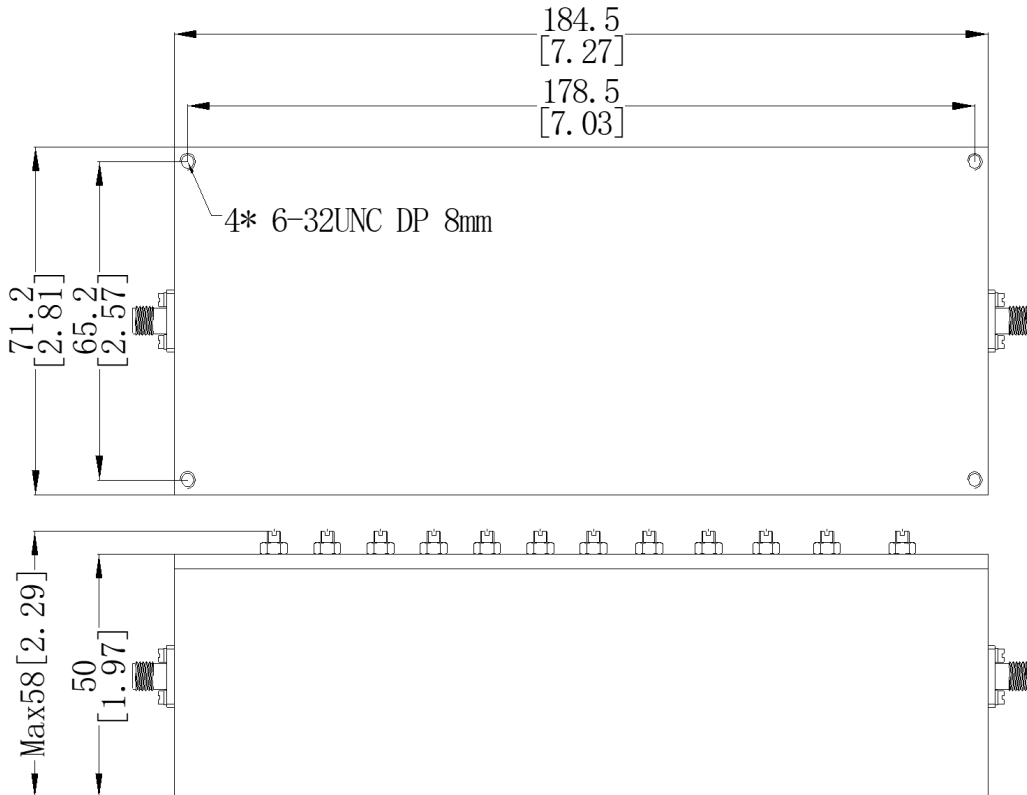

Tolerance: +/-0.01 inches [+/- 0.3mm]

Angles: +/- 1 Deg.

*Tolerance as shown unless otherwise specified in the datasheet electrical specification tables above.

*When max dimensions are called out the above tolerances do not apply as long as it is under the max call out.

70 Outwater Lane Phone: (973) 772-4242
Garfield, NJ 07026 Fax : (973) 321-3941

Email: sales@anatechelectronics.com
Web: www.anatechelectronics.com




ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

915 MHz Cavity Band Pass Filter

Part Number: AE915B11737



Simulation Plot:

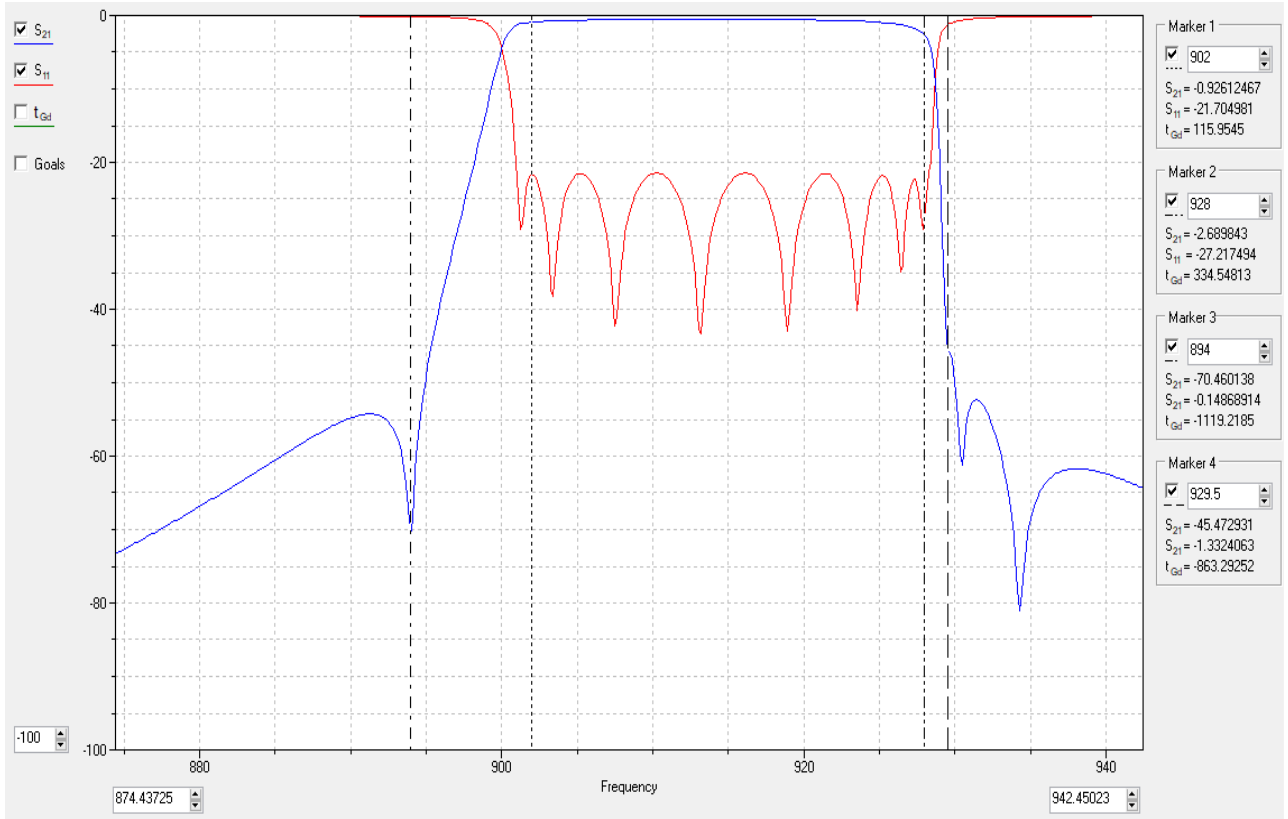

Note: This is a simulated response plot. Actual performance might differ.

70 Outwater Lane Phone: (973) 772-4242
Garfield, NJ 07026 Fax : (973) 321-3941

Email: sales@anatechelectronics.com
Web: www.anatechelectronics.com