



2420 MHz Cavity Bandpass Filter

ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

Part Number: AB2420B723



Electrical specifications

Center Frequency: 2420 MHz
3 dB bandwidth: 32 MHz min
Insertion loss in PB: 3.0 dB max
Return loss: 15 dB min
Rejection 1: 20 dBc min @2399 MHz
Rejection 2: 20 dBc min @2443 MHz


Mechanical

Mounting Method: Threaded Mounting Holes
Connector Type: N Female
Dimensions: 6.46 x 3.30 x 1.65 inches

Environmental

Operating Temperature: -45 to +85° C
Storage Temperature: -55 to +95° C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

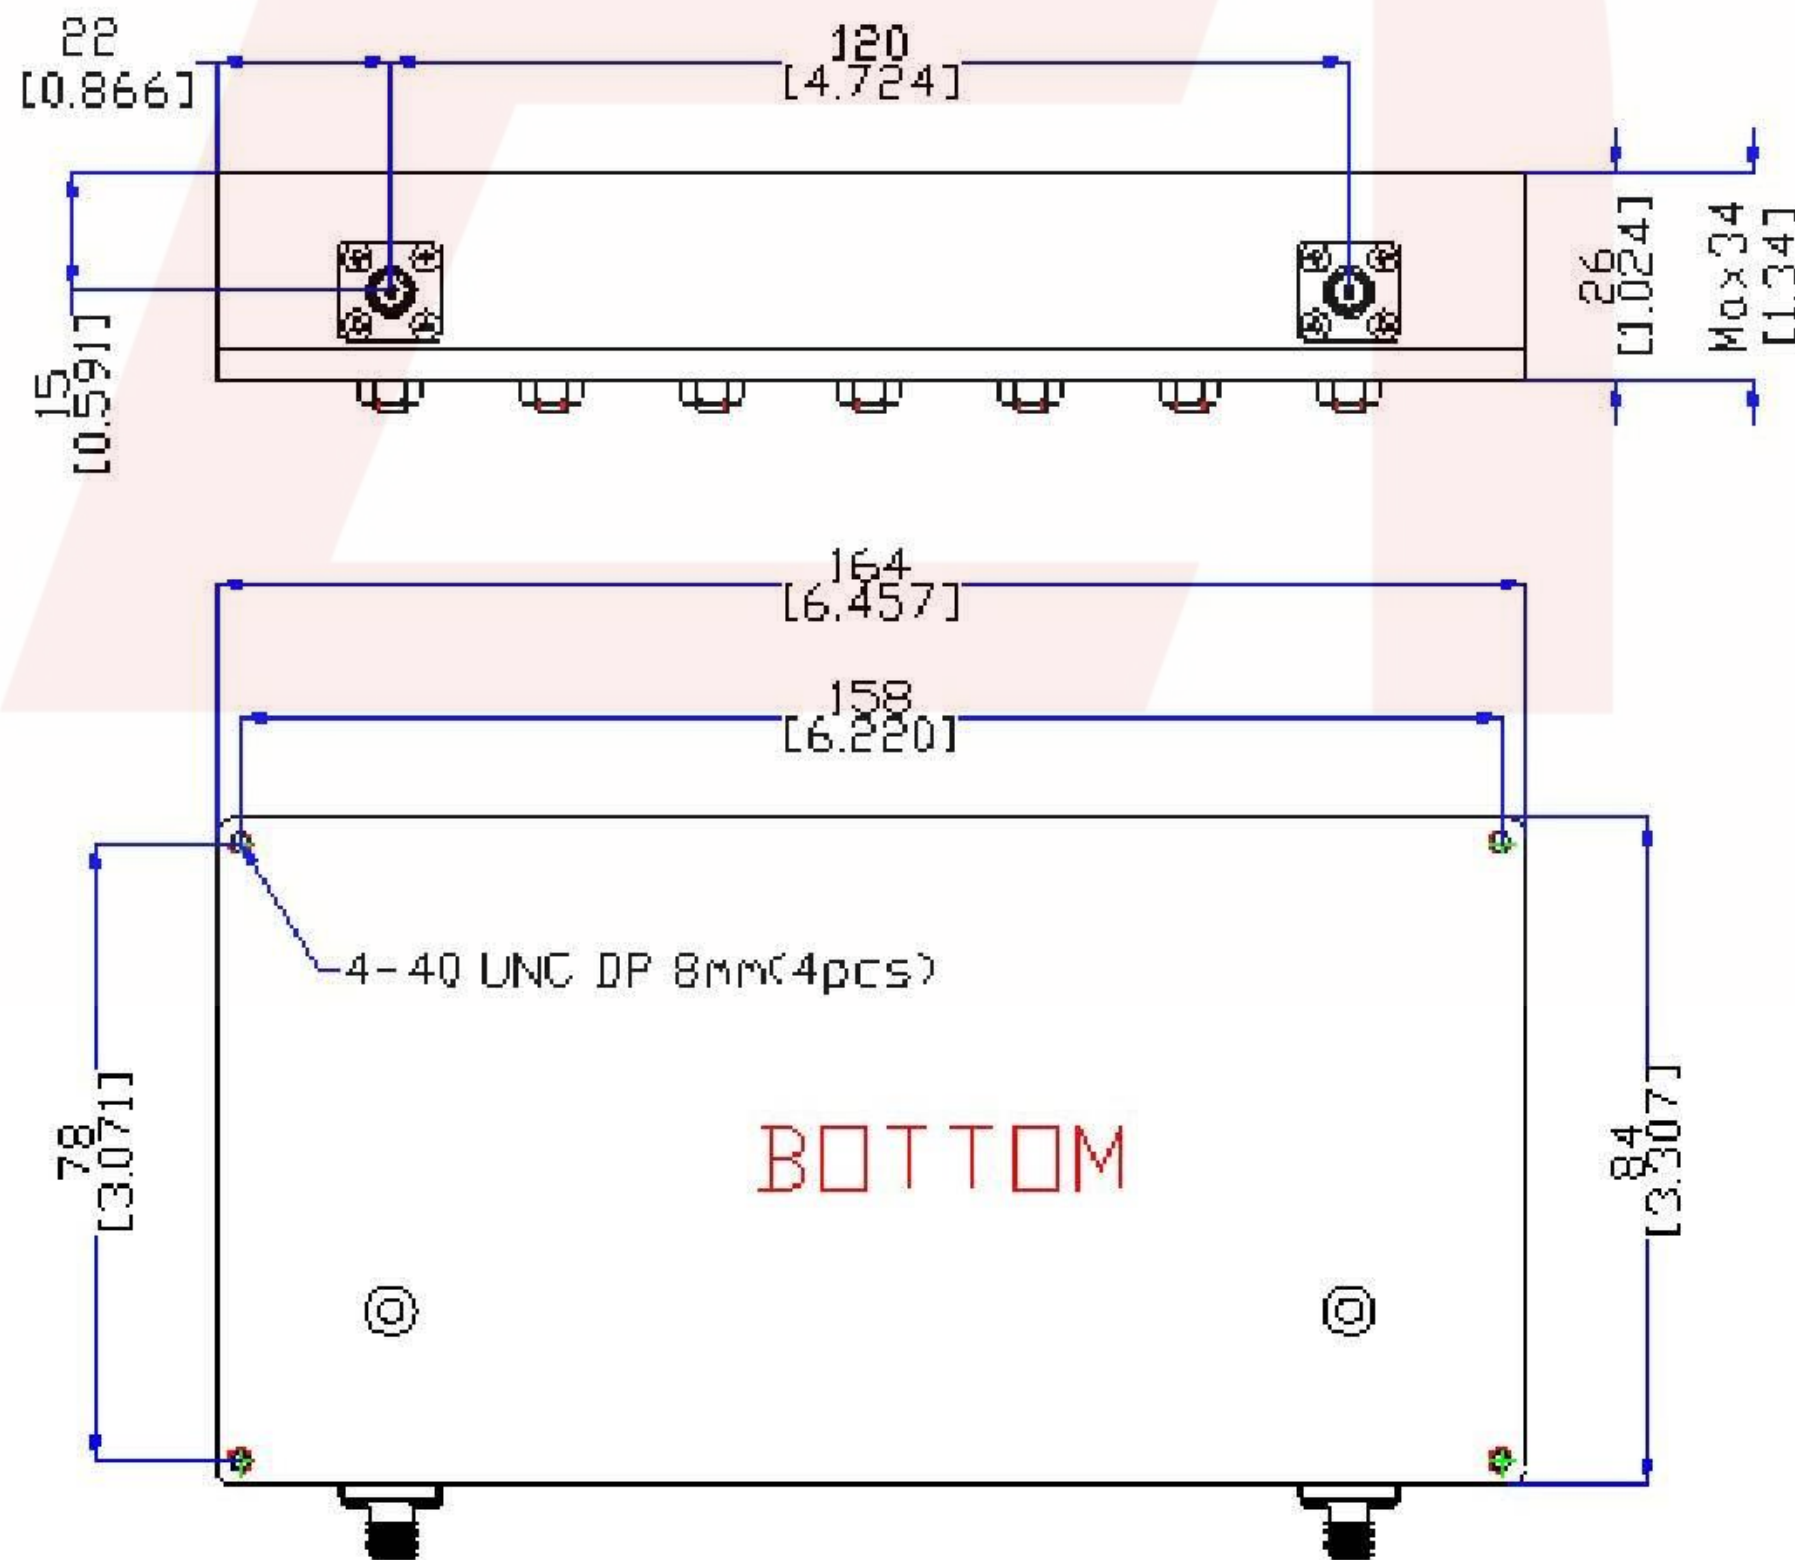



2420 MHz Cavity Bandpass Filter

ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

Part Number: AB2420B723



Plot:

