



Electrical specifications

Center Frequency (CF): 466.675 MHz
1dB Bandwidth: 2 MHz
Pass Band Ripple: 0.5 dB Max
Insertion Loss: 1.0 dB @ 466.675 MHz
Return Loss: 15 dB Min
Rejection @ 451.4 MHz: 35 dB Min

Power Handling: 25 W

Mechanical


Connector Type: N Type Female
Dimensions: 3.61 x 3.61 x 2.92 inches

Environmental

Operating Temperature: -40 to +70° C
Storage Temperature: -55 to +85° C

Shock: 20 G, for 11 msec
Vibration: 20 G, 5 to 200 Hz

Outline Drawing:

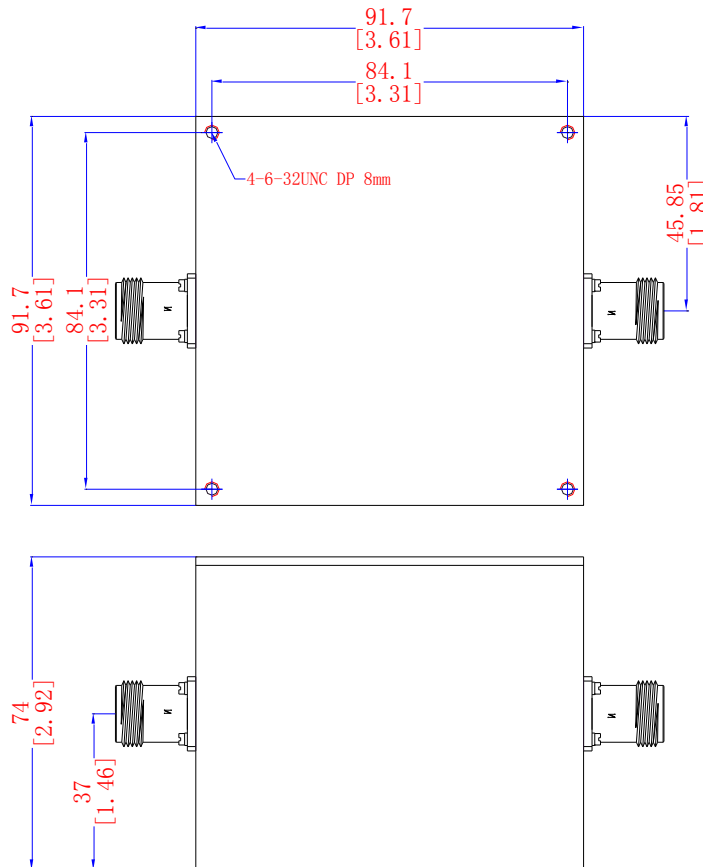



Response Plot

