



# 18-30 MHz LC Lowpass Filter

**Part Number: AE30L9097**



## Electrical specifications

**Cutoff Frequency (FC):** 24 MHz  
**Passband:** 18-30 MHz  
**Insertion loss over Passband:** 3 dB Min  
**Return loss Over Passband:** 15 dB Max  
**Rejection @ 36 MHz:** 40 dB Max


## Mechanical

**Mounting Method:** Thru Holes  
**Dimensions:** 4 x 0.6 x 0.6 Inches

## Environmental

**Operating Temperature:** -40 to +85° C  
**Storage Temperature:** -55 to +95° C

## Outline Drawing:

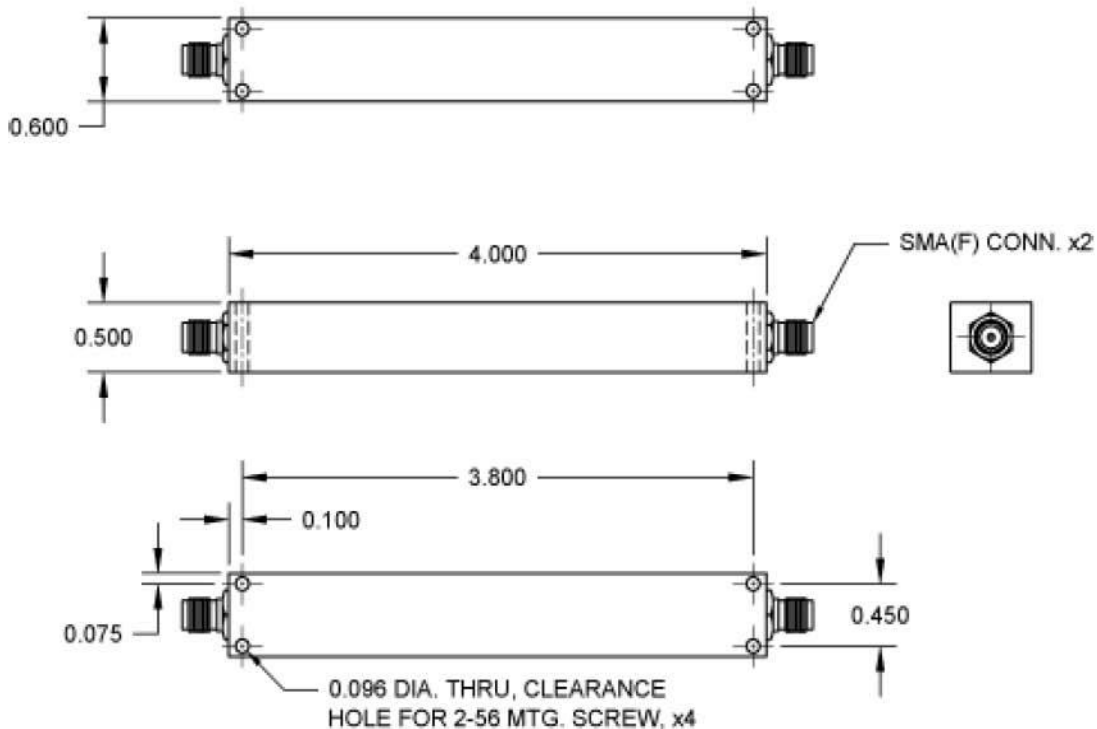




### Response Plot

A143.lad

001 4, 2010

Attenuation/Return Loss

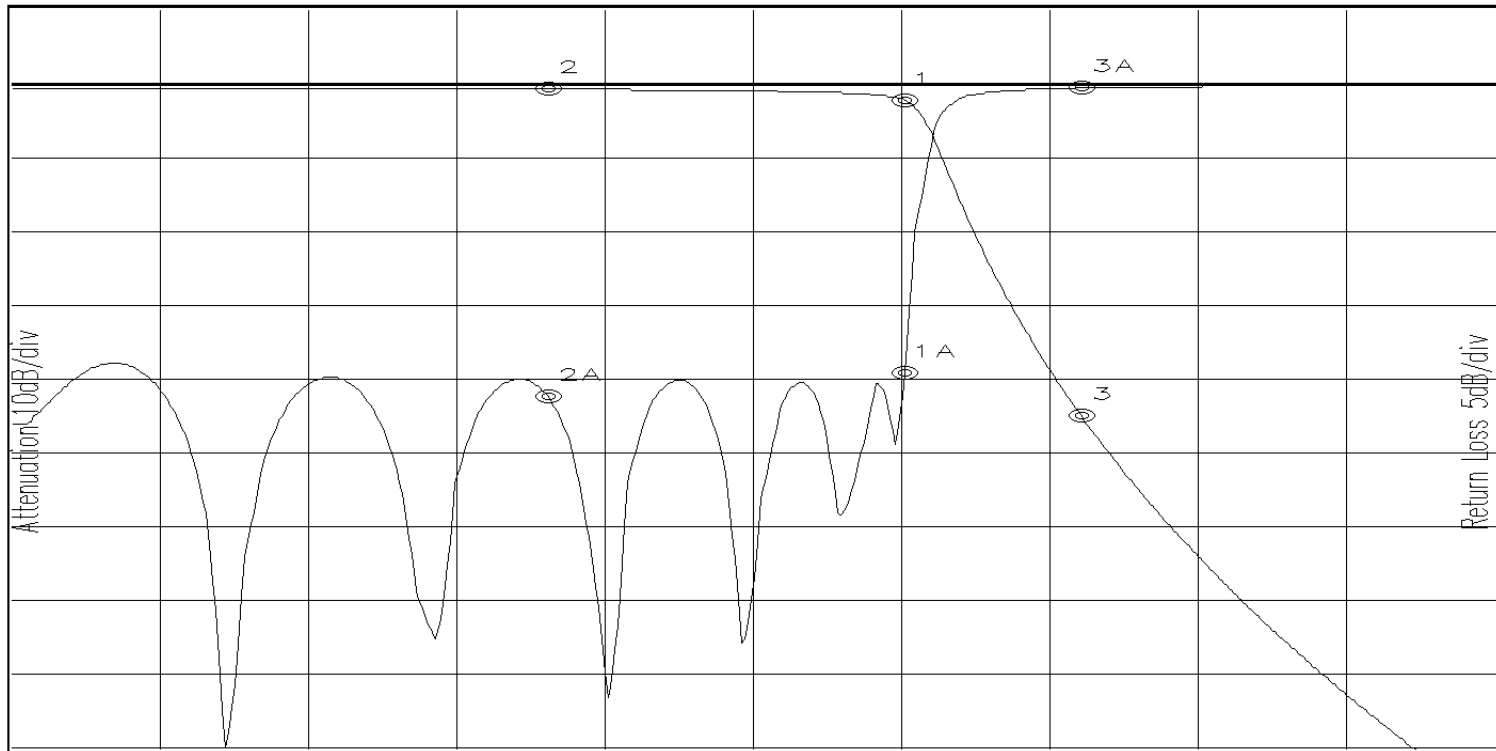

Attenuation Start: 0.005Hz Stop: 50.0MHz

Return Loss Start: 0.005Hz Stop: 50.0MHz

Marker 1 Freq 30.048MHz Atten -2.175dB  
 Marker 2 Freq 18.013MHz Atten -0.726dB  
 Marker 3 Freq 36.026MHz Atten -45.310dB

Marker 1A Freq 30.048MHz Ret Loss -19.633dB  
 Marker 2A Freq 18.013MHz Ret Loss -21.324dB  
 Marker 3A Freq 36.026MHz Ret Loss -0.262dB