



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

2472 MHz WiFi Cavity Bandpass Filter for Outdoor

Part Number: WiFi2472-130



Electrical specifications

Center Frequency: 2472 MHz
1dB Bandwidth: 22 MHz
Input / Output Impedance: 50 Ohms
Passband Insertion Loss: 3 dB max
Passband Ripple: 1.2 dB max
Passband Return Loss: 15 dB min
Rejection: 30 dB min @ $F_o \pm 20$ MHz
Rejection 2: 60 dB min @ $F_o \pm 25$ MHz
Rejection 3: 90 dB min @ $2 \cdot F_o \pm 22$ MHz
Power Handling: 50 W


Mechanical

Mounting Method: Threaded Mounting Holes
Connector Type: N-Type (F)
Dimensions: 123 x 71 x 31 mm

Environmental

Operating Temperature: 0 to +50 deg.C
Storage Temperature: -55 to +95 deg.C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

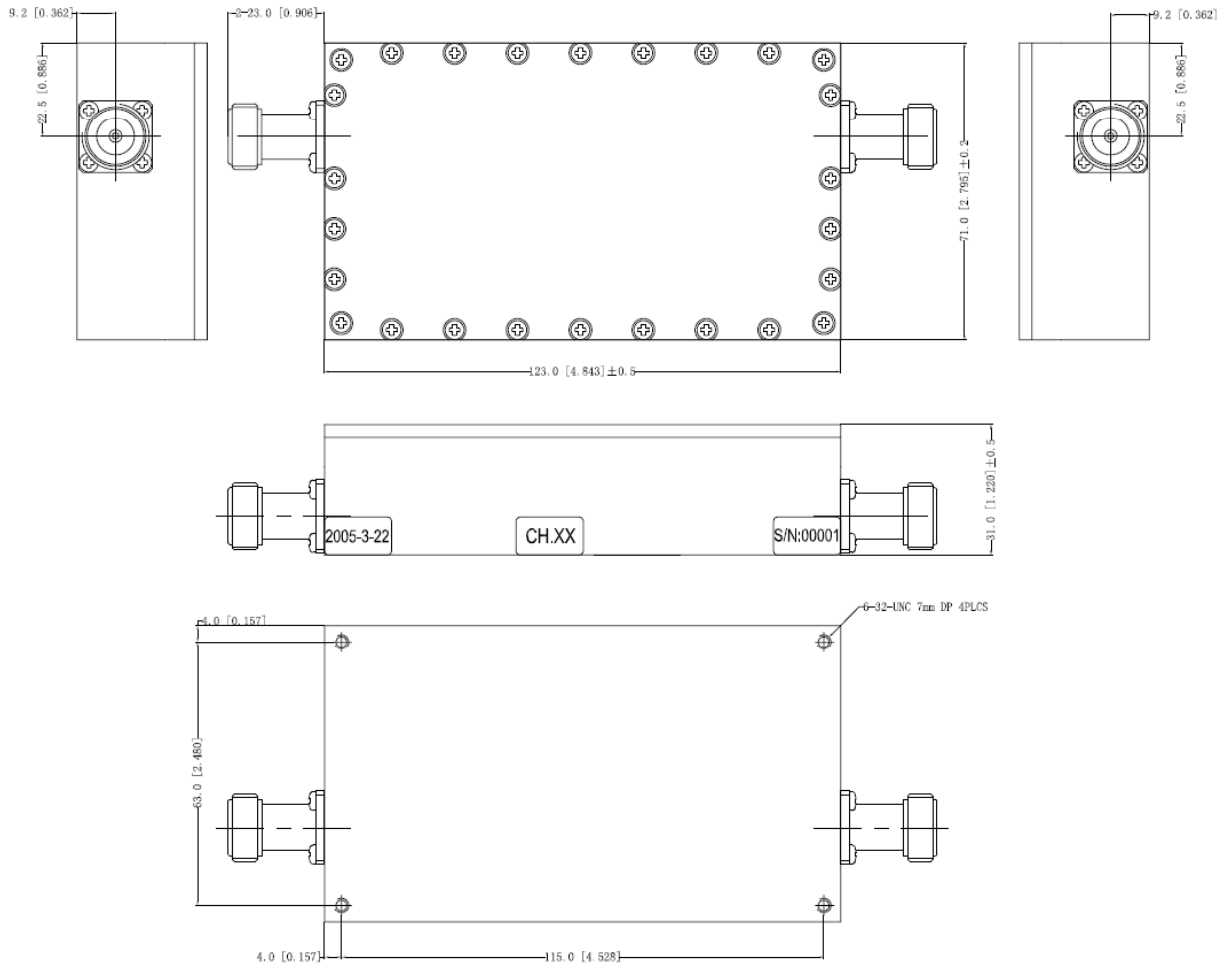



Response Plot:

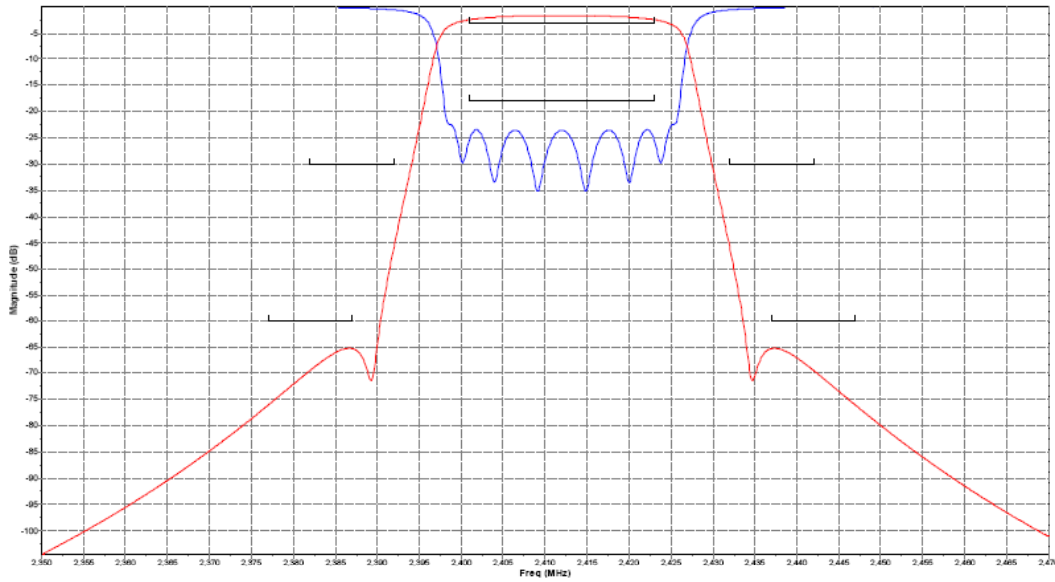


Fig.1 Return Loss and Rejection

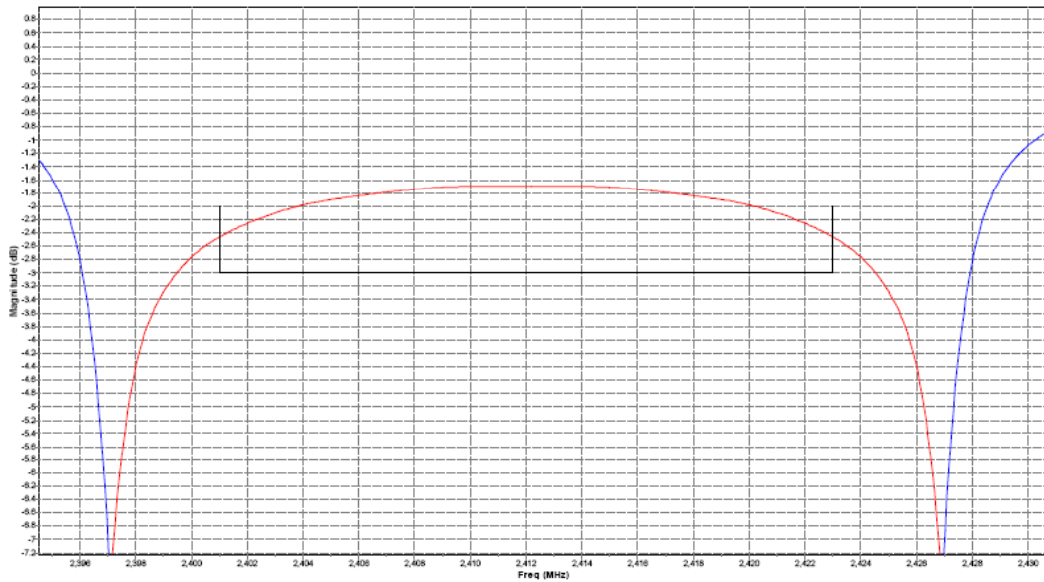


Fig.2 Insertion Loss and Ripple