



915 MHz Cavity Bandpass Filter

.....: cf Ci IXccf'



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

Part Number: AB915B662

Electrical specifications

Frequency Range: 902-928 MHz

Insertion loss: 1.5 dB max

Return loss: 20 dB min

Rejection 1: 45 dB@850-894 MHz

Rejection 2: 45 dB@936-950 MHz

Mechanical

Mounting Method: Threaded Mounting Holes

Connector Type: N Female

Dimensions: 140 X 80 X 53 mm

Environmental

Operating Temperature: -45 to +85° C

Storage Temperature: -55 to +95° C


K YUH Yf DfccZ ÁQÍ Í

Shock: 20 G. 11ms

Vibration: 20 G. 5 to 200 MHz

Outdoor Version: IP65

Outline Drawing:

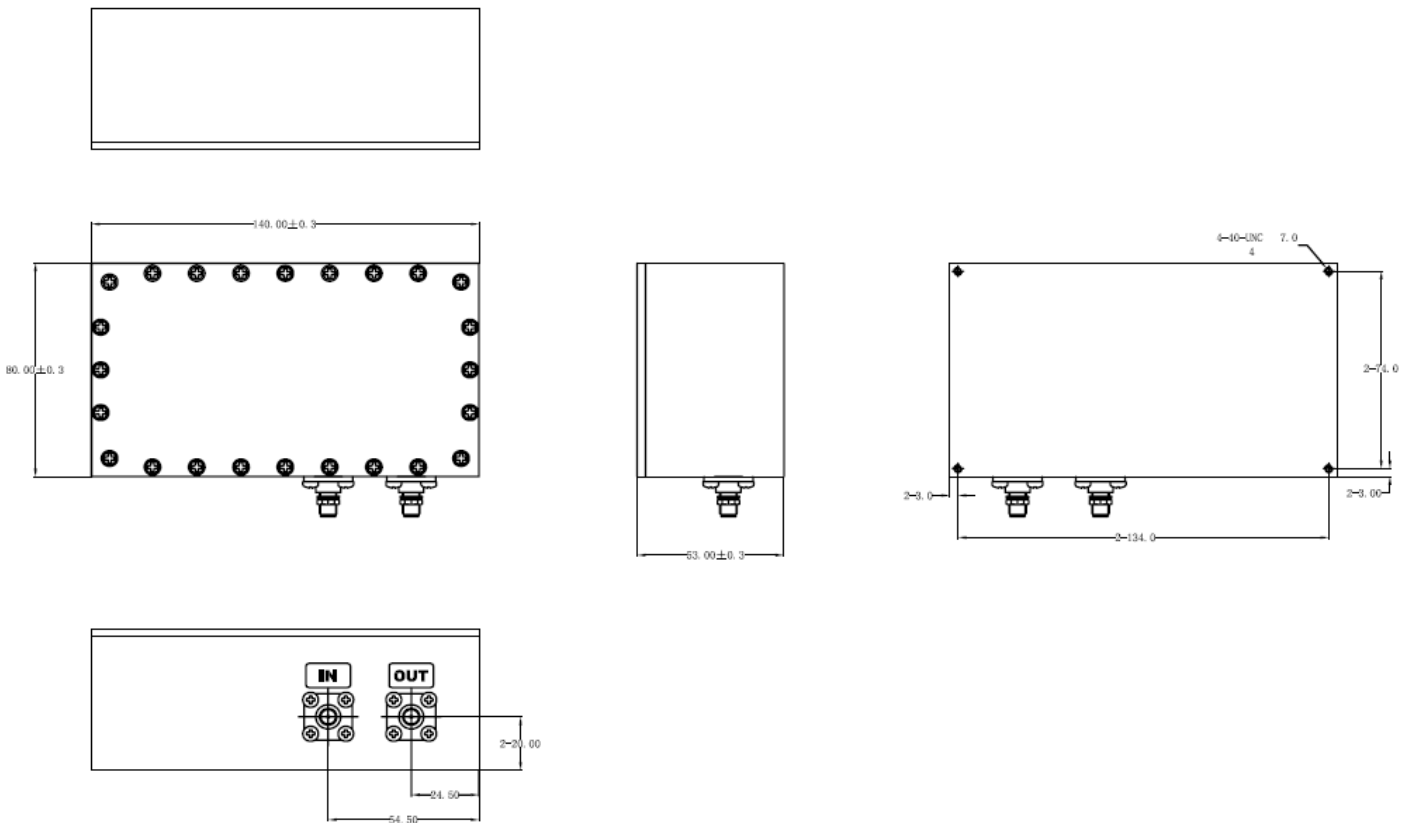



915 MHz Cavity Bandpass Filter

.....: cf Ci Xccf'

Part Number: AB915B662



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

FYgdcbgYPlot:

