



**Electrical specifications**

**Center Frequency:** 2442 MHz  
**1dB Bandwidth:** 22 MHz  
**Insertion loss:** 3 dB max (2 dB typ)  
**Return loss:** 15 dB min (18 dB typ)  
**Ripple:** 1.2 dB max  
**Rejection 1:** 30 dB min@Fo+/- 20 MHz  
**Rejection 2:** 60 dB min@Fo+/-25 MHz  
**Rejection 3:** 90 dBc min@2\*Fo+/-22 MHz  
**Power Handling:** 50 Watts


**Mechanical**

**Mounting Method:** Threaded Mounting Holes  
**Connector Type:** N-Type Female  
**Dimensions:** 4.83" x 2.79" x 1.22" in

**Environmental**

**Operating Temperature:** -40 to +85 deg.C  
**Storage Temperature:** -55 to +95 deg.C  
**Shock:** 20 G. 11ms  
**Vibration:** 20 G. 5 to 200 MHz

**Outline Drawing:**

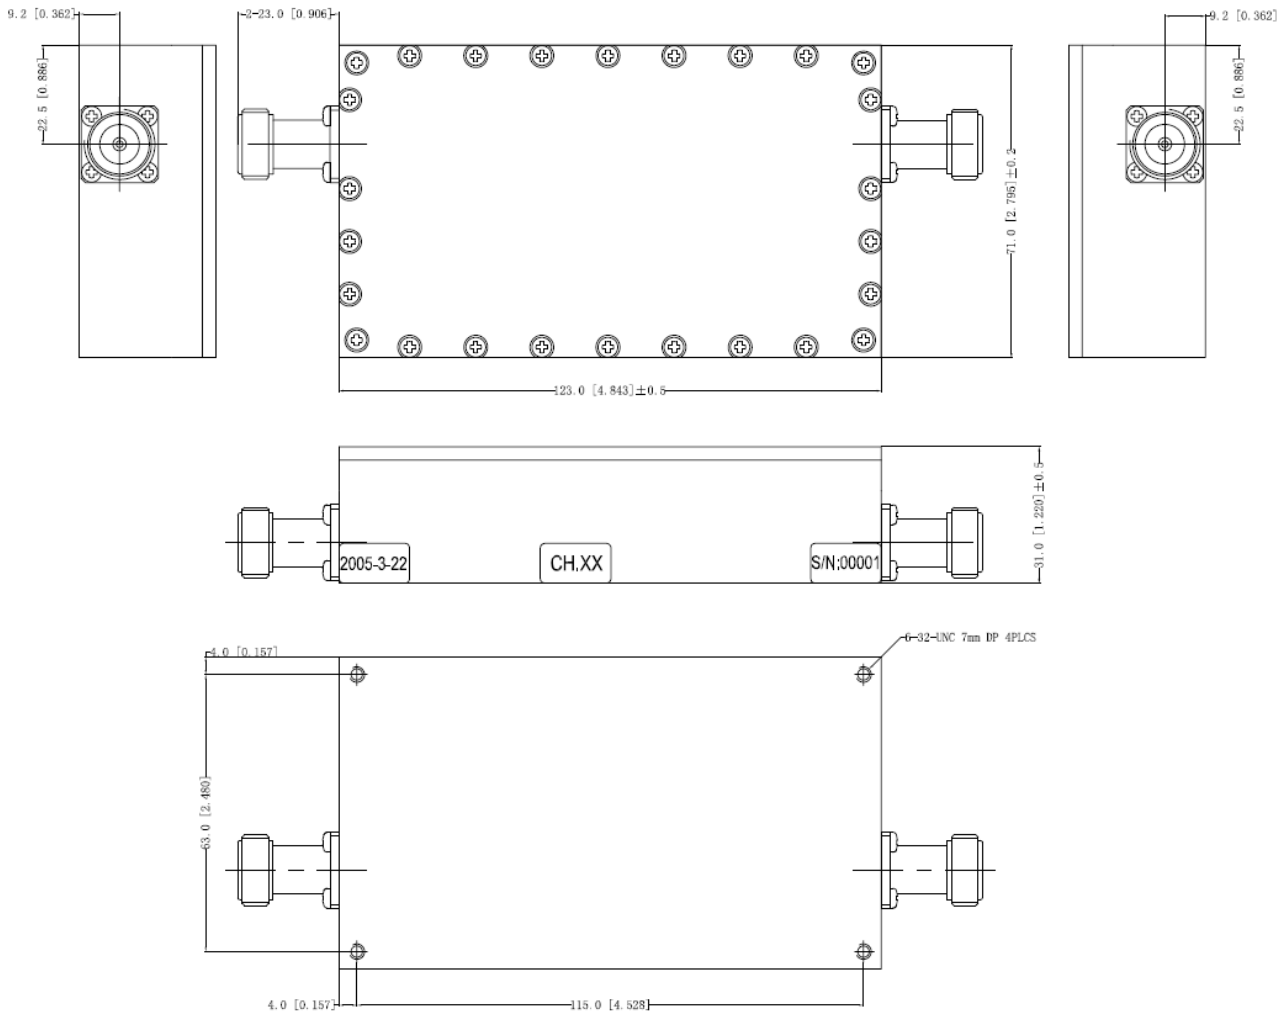



**Response Plot:**

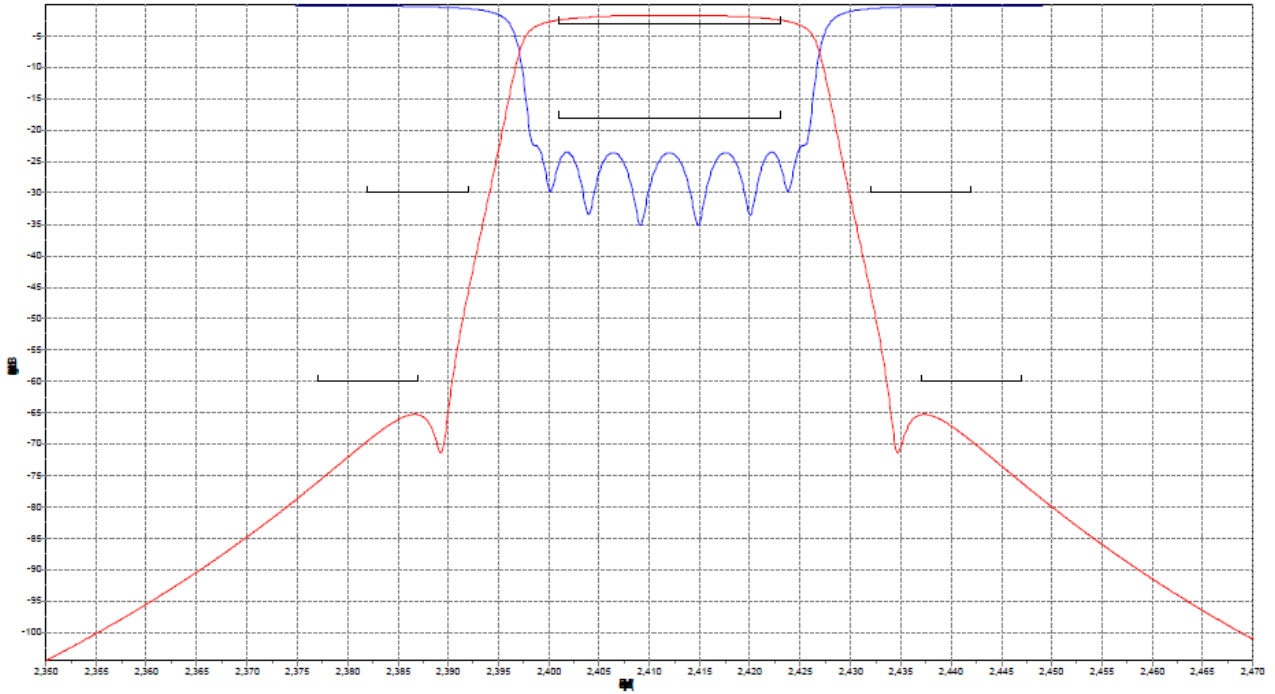


Fig.1 Return Loss and Rejection

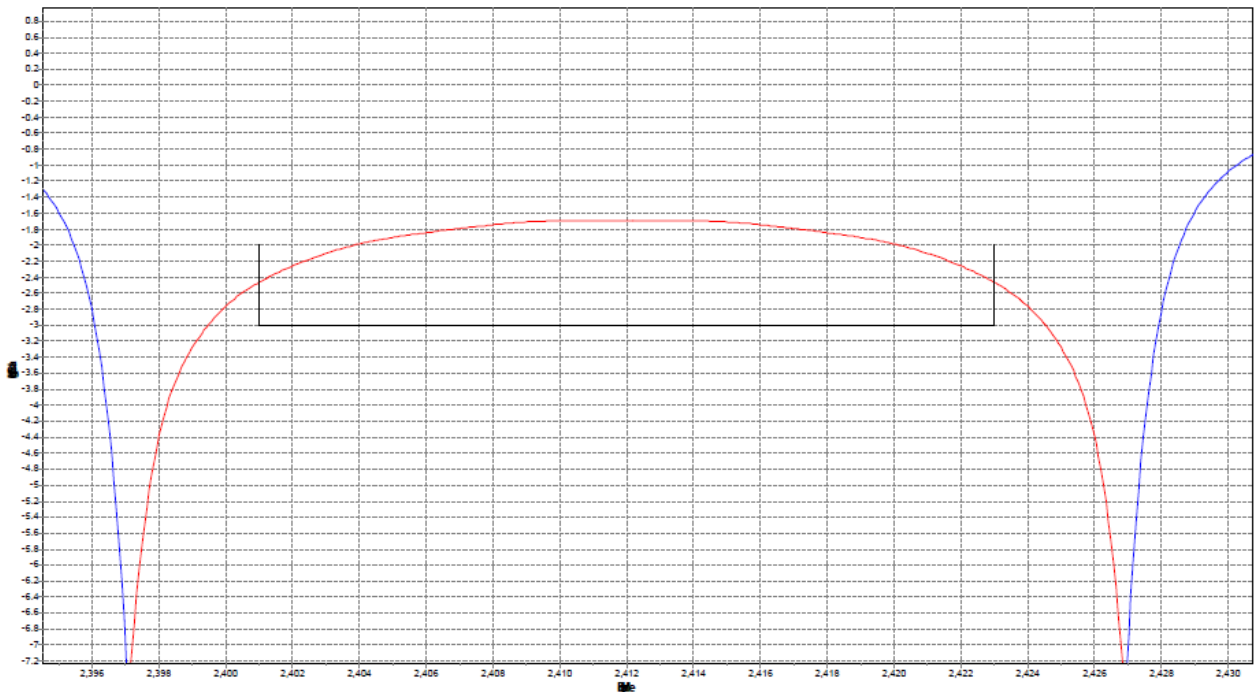


Fig.2 Insertion Loss and Ripple