



Electrical Specifications

Center Frequency: 1370 MHz
3dB Bandwidth: 40 MHz
Passband: 1350-1390 MHz
Insertion Loss at Center: 2.5 dB Max
Rejection: >35 dB @ 1330 MHz
 >35 dB @ 1410 MHz
Power Handling: 2 Watts


Mechanical

Connector Type: SMA (F)
Dimensions: 2.50 x 1.0 x 0.63 Inches

Environmental


Operating Temperature: -40 to +85° C
Storage Temperature: -50 to +95° C

Outline Drawing:

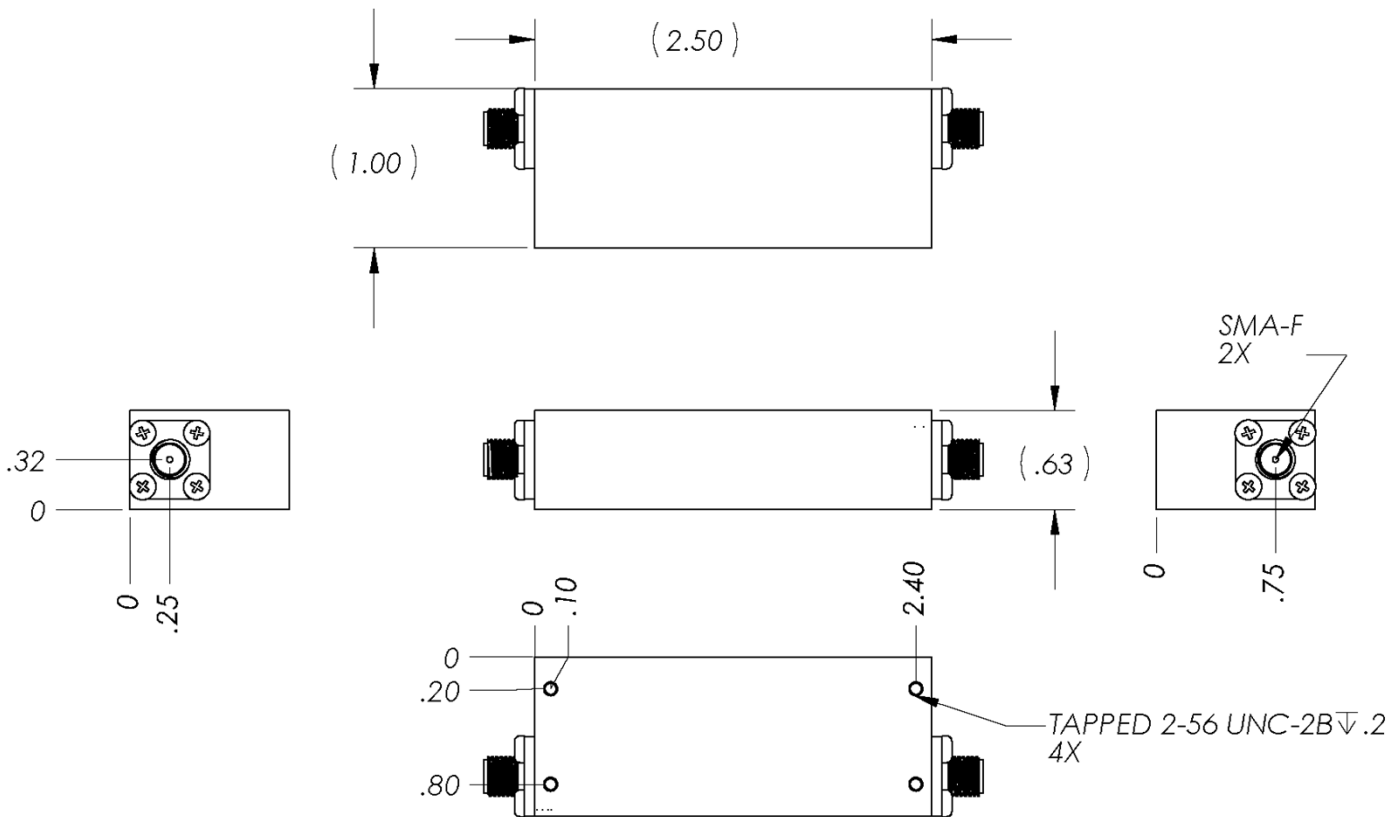



Response Plot:

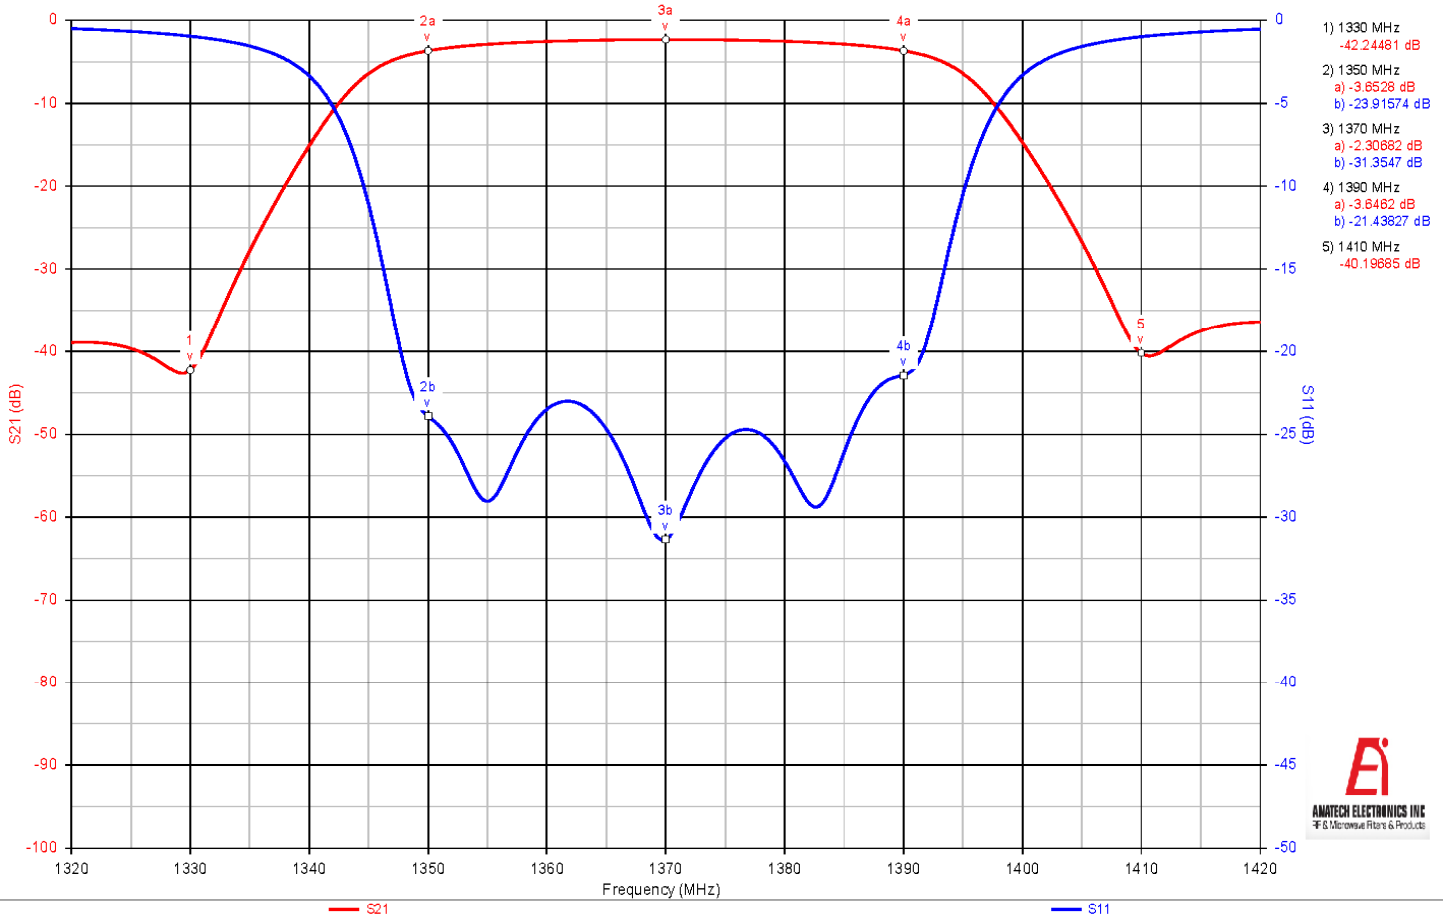

Note: This is a simulation plot. Actual results may differ once the product is implemented.