



Electrical specifications

Frequency range: 2.3 GHz to 2.4 GHz
Frequency Bandwidth: 20 MHz
Insertion loss: 1.7 dB
Return loss: -19 dB
Rejection: 94 dB @ CF +/- 43 MHz


Mechanical

Mounting Method: Threaded Mounting Holes
Connector Type: SMA Female
Dimensions: 5.25" X 1.40" X 0.90" in

Environmental

Operating Temperature: -45 to +85° C
Storage Temperature: -55 to +95° C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

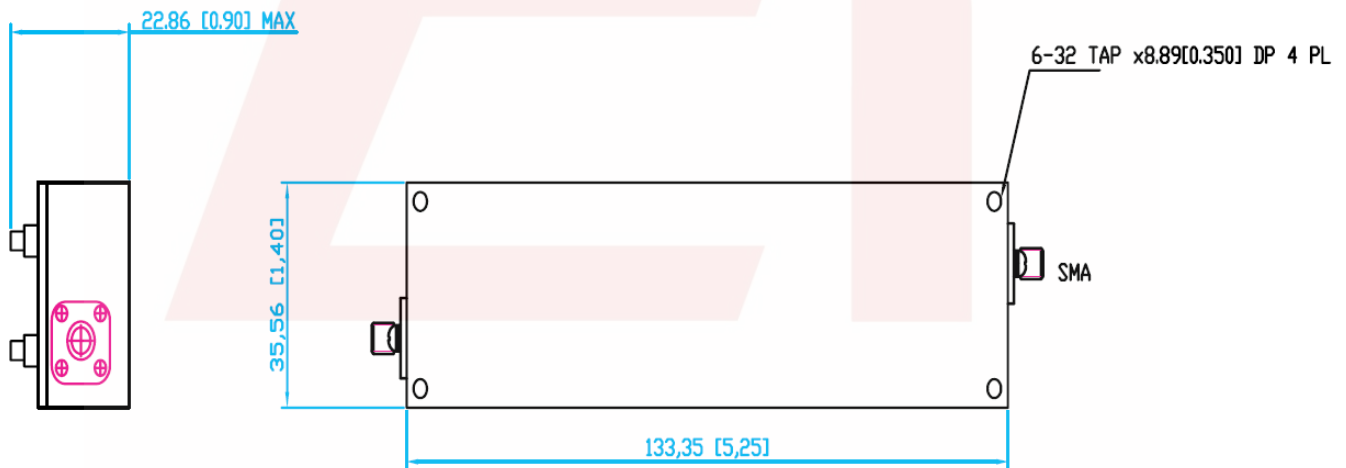

Finish: Black Paint



Plot:

