



17266 MHz Cavity Band Pass Filter

ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

Part Number: AE17266B11677



Electrical Specifications

Center Frequency: 17266 MHz
Bandwidth: 9024 MHz (12754-21778 MHz)
Insertion Loss : 2.0 dB Max.
VSWR : 2.2:1 Max.
Rejection1: 70dB Min @ 1275-10840 MHz
Rejection2: 80dB Min @ 25508-42000 MHz
Power Handling: 5 Watts
Impedance : 50 Ohms


Mechanical

Mounting Method: Through Holes
Connector Type: 2.92- Female
Dimensions: 2.13" X 0.75" x 0.35"

Environmental

Operating Temperature: -40°C to +70°C
Storage Temperature: -55°C to +85°C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200Hz

Outline Drawing:

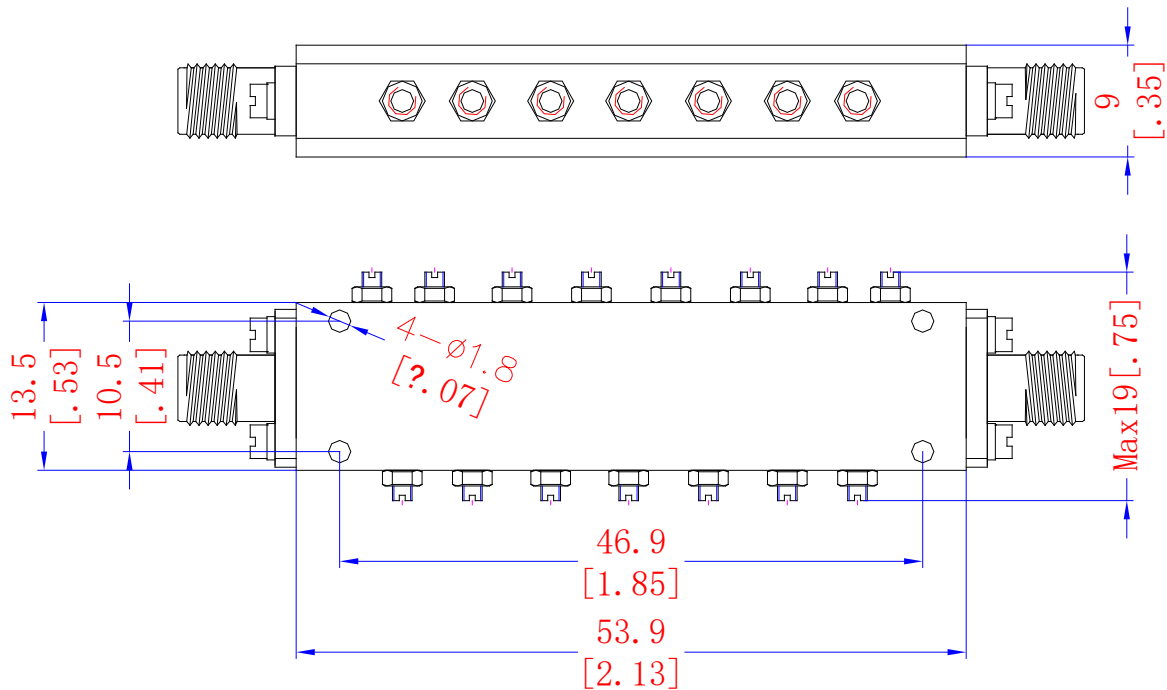

2 decimal places: +/-0.01 inches [+/- 0.3mm]

3 decimal places: +/- 0.005 inches [+/- 0.13mm]

Angles: +/- 1 Deg.

When max dimensions are called out the above tolerances do not apply as long as it is under the max call out.

70 Outwater Lane **Phone: (973) 772-4242**
Garfield, NJ 07026 **Fax : (973) 321-3941**

Email: sales@anatechelectronics.com
Web: www.anatechelectronics.com