



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

3225 MHz Cavity Band Pass Filter

Part Number: AE3225B5402



Electrical Specifications

Center Frequency: 3225 MHz
3dB Bandwidth: 100 MHz
Insertion Loss: 3.0dB Max.
Rejection1: 50dB Min. @ 3000 MHz
Rejection2: 50dB Min. @ 3450 MHz
Impedance: 50 Ohms


Mechanical

Connector Type: PC-Mount
Dimensions: 2.6" X 1.0" x 0.6" in.

Environmental

Operating Temperature: -25°C to +70°C
Storage Temperature: -40°C to +90°C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200Hz

Outline Drawing:

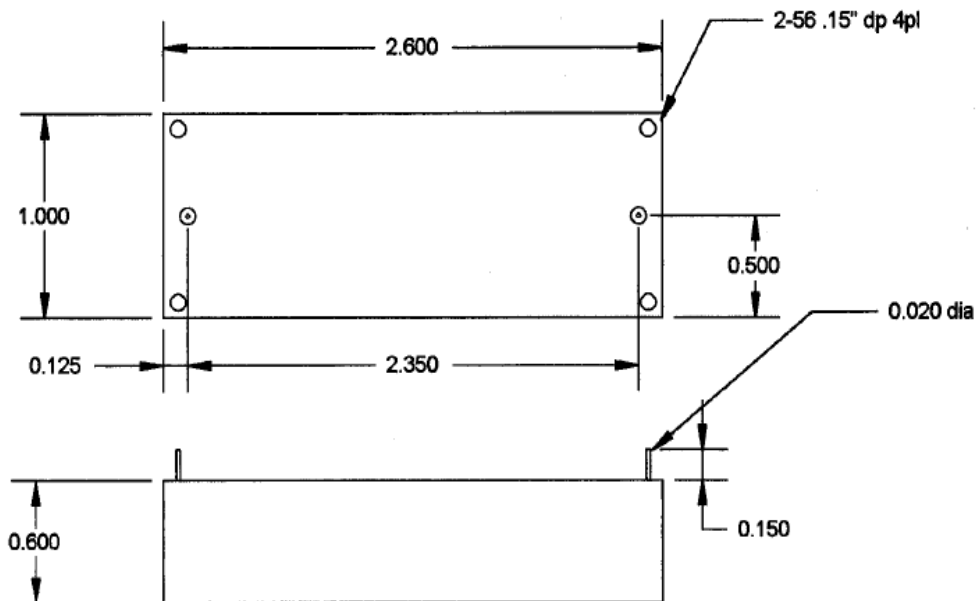

2 decimal places: +/-0.01 inches [+/- 0.3mm]

3 decimal places: +/- 0.005 inches [+/- 0.13mm]

Angles: +/- 1 Deg.

When max dimensions are called out the above tolerances do not apply as long as it is under the max call out.

70 Outwater Lane Phone: (973) 772-4242
Garfield, NJ 07026 Fax : (973) 321-3941

Email: sales@anatechelectronics.com
Web: www.anatechelectronics.com