



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

2302 MHz Cavity Bandpass Filter

Part Number: AB2302B924



Electrical specifications

Center Frequency: 2302 MHz
Bandwidth: 22 MHz
Input / Output Impedance: 50 Ohms
Passband: 2291 – 2313 MHz
Passband Insertion Loss: 2 dB max
Passband Ripple: < 0.2 dB
Passband Return Loss: 15 dB min
Rejection: 60 dB min @ Fo +/-32.5 MHz
Power Handling: 50 Watts


Mechanical

Mounting Method: Threaded Mounting Holes
Connector Type: N-Type Female
Dimensions: 123 x 71 x 31 mm.

Environmental

Operating Temperature: -40 to +85 deg.C
Storage Temperature: -55 to +95 deg.C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

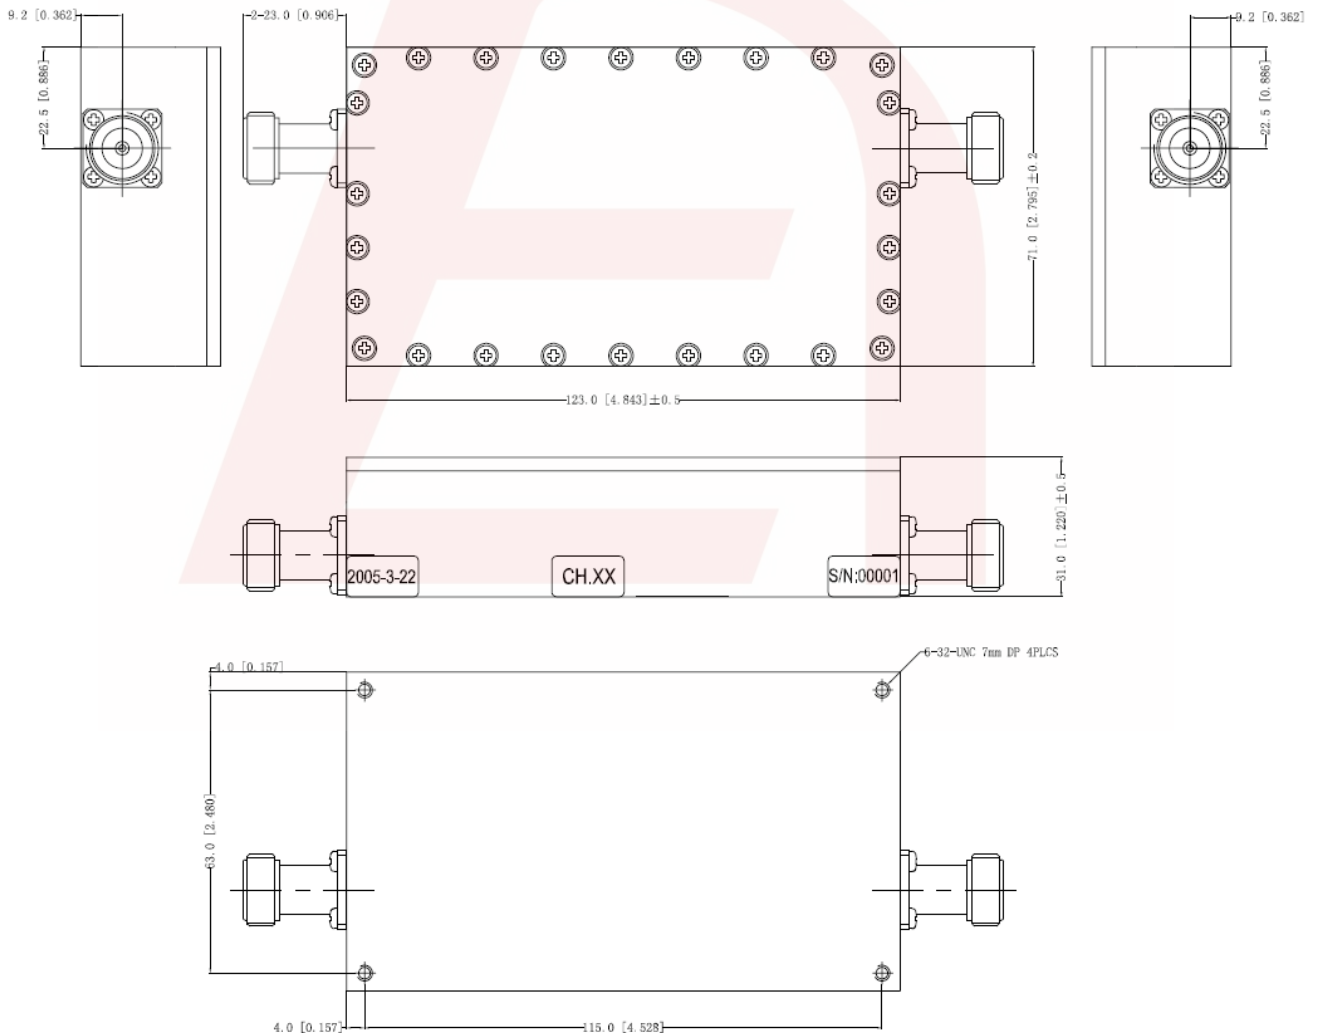



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

2302 MHz Cavity Bandpass Filter

Part Number: AB2302B924



Response Plot:

