



**Electrical specifications**

**Center Frequency:** 200MHz  
**Passband:** 196-204MHz  
**Passband Variation:**  $\leq 2.0\text{dB}$   
**VSWR Over Passband:**  $\leq 3\text{dB}$   
**Rejection:**  $\geq 60\text{dB}$  @ 150MHz  
**Rejection 2:**  $\geq 60\text{dB}$  @ 300MHz  
**Rejection 3:**  $\geq 60\text{dB}$  up to 400MHz  
**Rejection 4:**  $\geq 50\text{dB}$  up to 3000MHz  
**Impedance:** 50 $\Omega$


**Mechanical**

**Mounting Method:** Drop-in  
**Dimensions:** 2.00" x 0.70" x 0.70"

**Environmental**

**Operating Temperature:** -45°C to +85°C  
**Storage Temperature:** -55°C to +100°C

**Outline Drawing:**

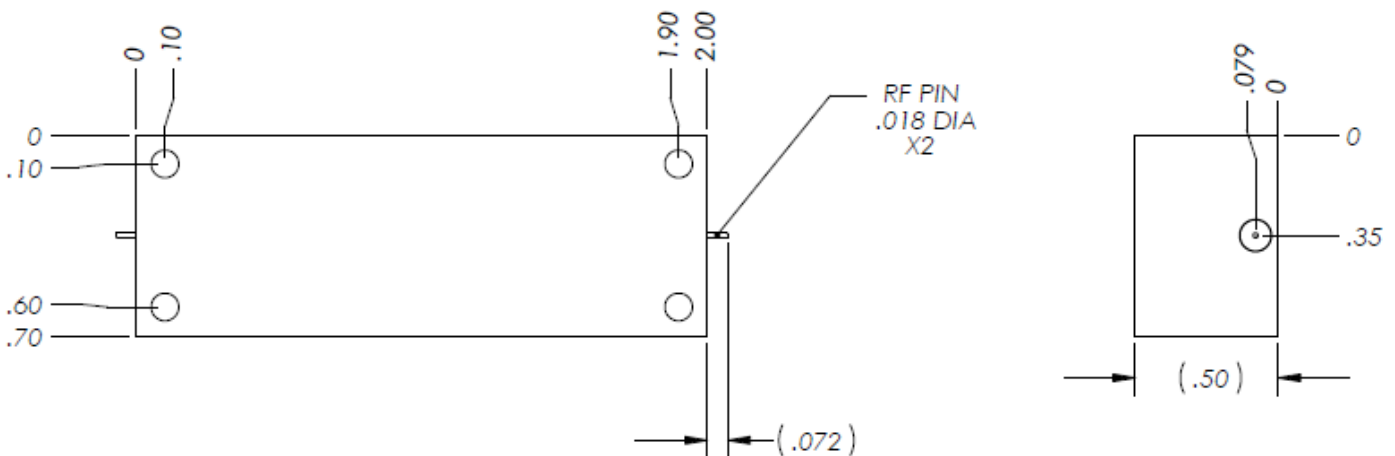



### Plot:

