



Electrical specifications

Center Frequency: 11380MHz
Ins. Loss @ Center Frequency: <=2.4dB
Passband: 10070-12690MHz
Passband Variation: <=1.2dB
VSWR Over Passband: </=1.6:1
Rejection: >/=60dB@6344MHz
Rejection 2: >/=60dB@15100-20000MHz
Impedance: 50Ω


Mechanical

Mounting Method: Drop-in
Dimensions: 1.54" x 0.37" x 0.58"

Environmental

Operating Temperature: -45°C to +85°C
Storage Temperature: -55°C to +100°C

Outline Drawing:

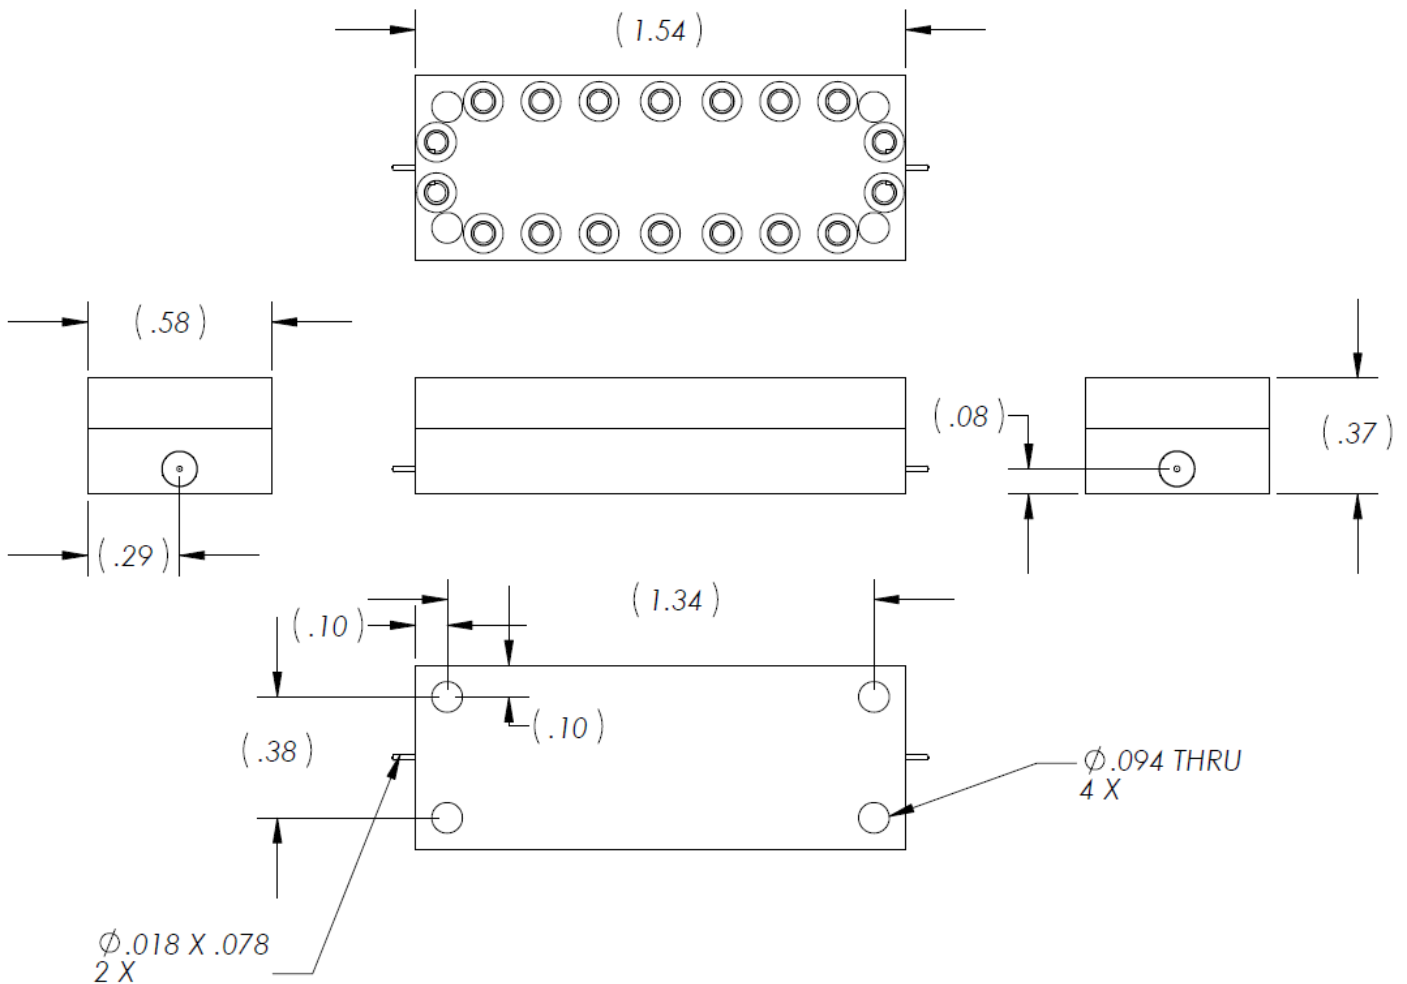



Plot:

