



# 2432 MHz WiFi Cavity Bandpass Filter For outdoor



**ANATECH ELECTRONICS INC**  
RF & Microwave Filters & Products

**Part Number: WiFi2432-50**

## Electrical specifications

**Center Frequency:** 2432 MHz  
**1dB Bandwidth:** 22 MHz  
**Insertion loss:** 3 dB max ( 2 dB typ)  
**Return loss:** 15 dB min (18 dB typ)  
**Ripple:** 1.2 dB max  
**Rejection 1:** 30 dB min@Fo+/-20 MHz  
**Rejection 2:** 60 dB min@Fo+/-25 MHz  
**Rejection 3:** 90 dBc min@2\*Fo+/-22 MHz  
**Power handling:** 50 Watts


## Mechanical

**Mounting Method:** Threaded Mounting Holes  
**Connector Type:** N-Type Female  
**Dimensions:** 4.84" x 2.48" x 1.22" in

## Environmental

**Operating Temperature:** -45 to +85° C  
**Storage Temperature:** -55 to +95° C  
**Shock:** 20 G. 11ms  
**Vibration:** 20 G. 5 to 200 MHz

## Outline Drawing:

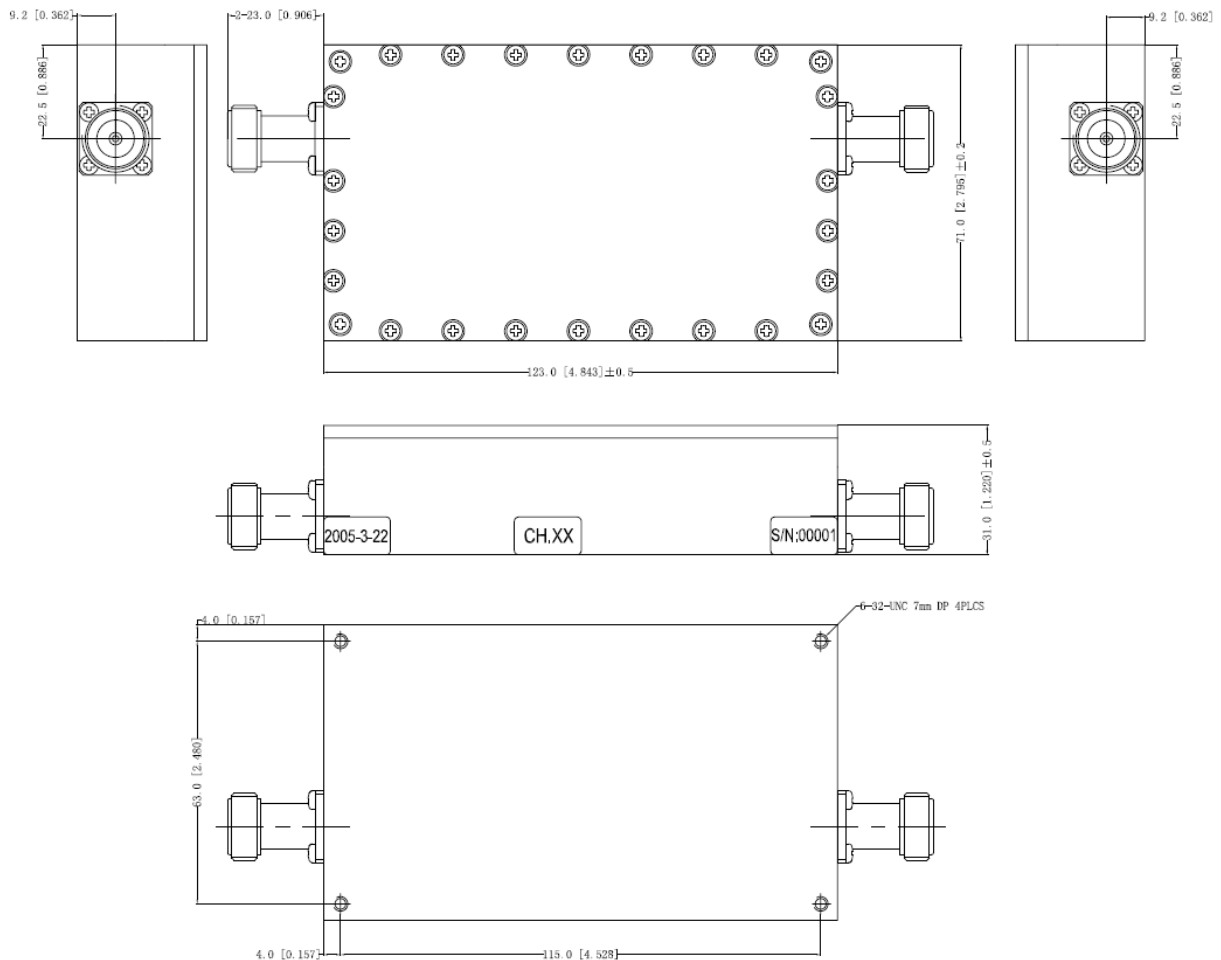



# 2432 MHz WiFi Cavity Bandpass Filter For outdoor

**ANATECH ELECTRONICS INC**  
RF & Microwave Filters & Products

**Part Number: WiFi2432-50**



## Plots:

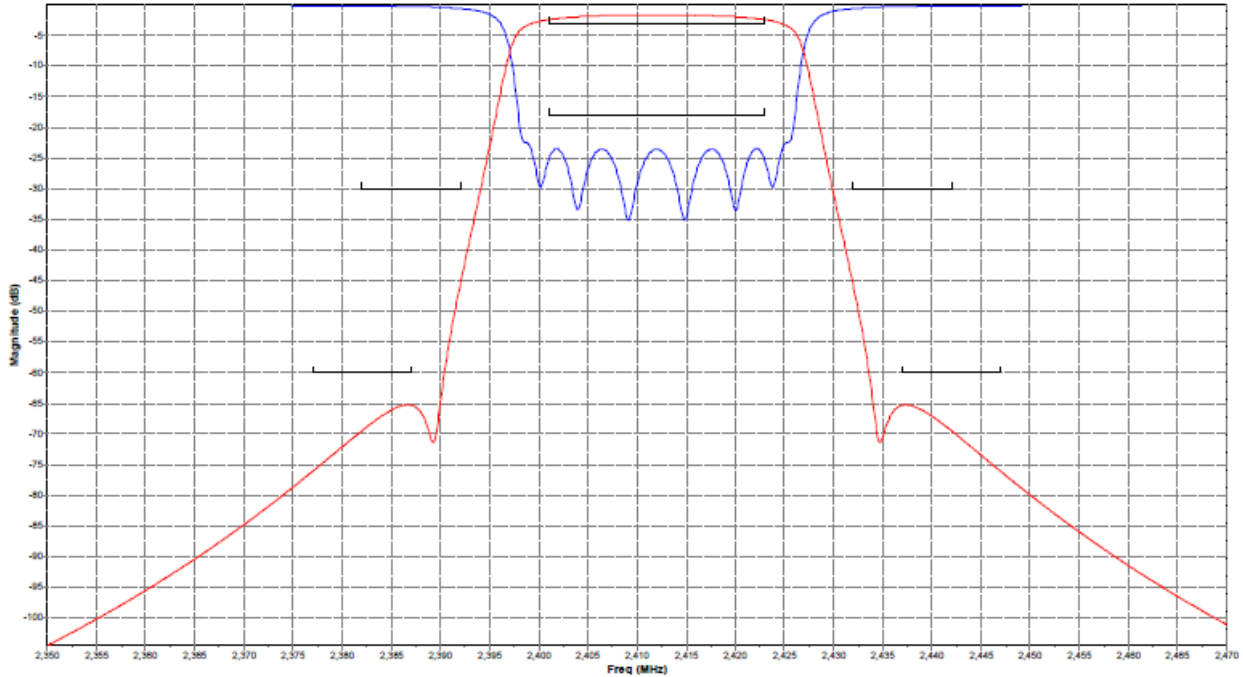


Fig.1 Return Loss and Rejection

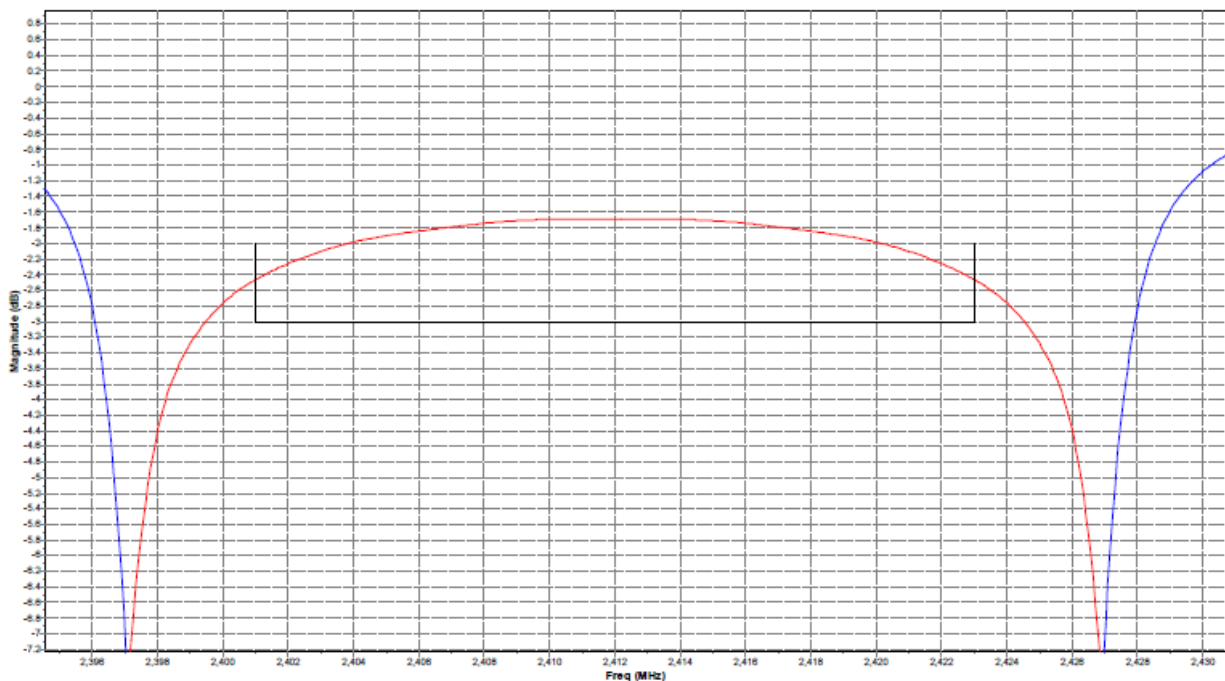


Fig.2 Insertion Loss and Ripple