


Part Number: CLPFL-0070-BNC

Low Pass Range
DC to 70 MHz

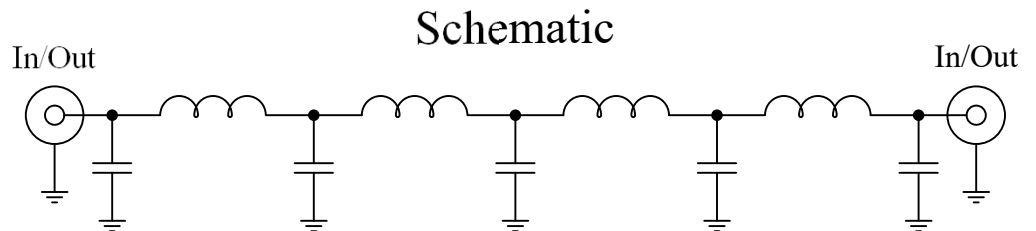

Features:


- 9th Order Chebyshev Response
- 50Ω BNC Connectors

Applications:

- Test Equipment
- Lab Use

Maximum Ratings:



- +36dBm (4 Watts)
- Operating Temperature: -40°C to 85°C
- Storage Temperature: -55°C to 100°C
- 5 VDC

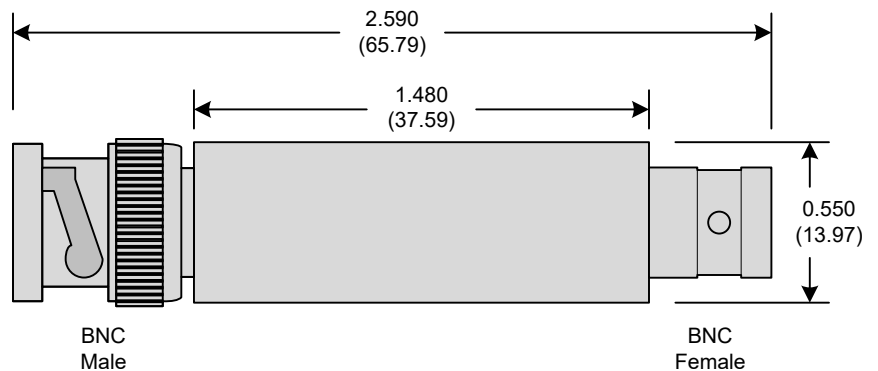

Crystek's new line of BNC Low Pass Filters are designed in a rugged BNC housing. This filter line has excellent out-of-band rejection.

Designed for Test Equipment and General Lab Use.

Rev D
Page 1 of 3

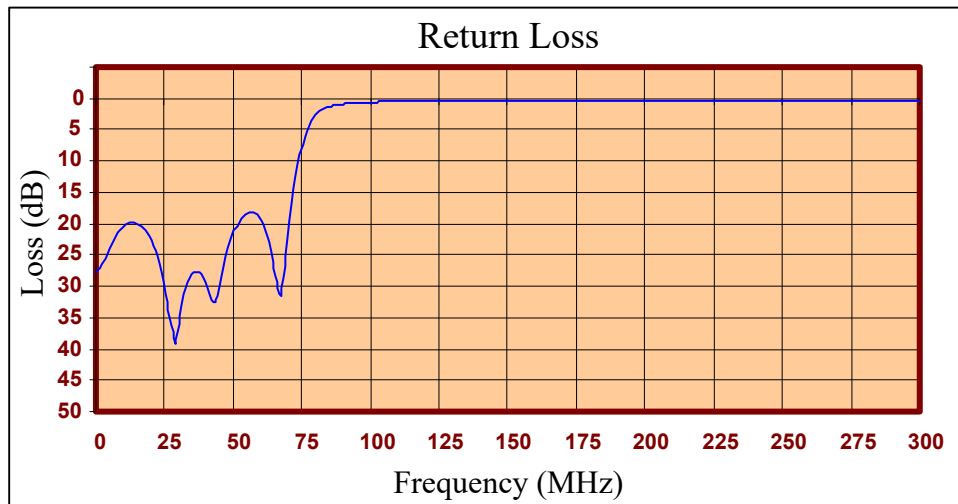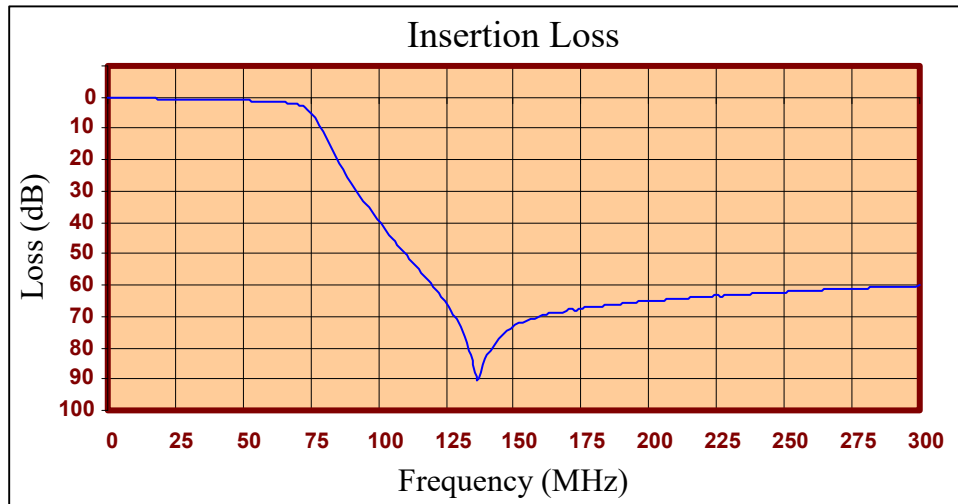



FREQ (MHz)	INSERTION LOSS (dB)	RETURN LOSS (dB)
0.300	0.29	27.77
1.799	0.31	27.12
3.297	0.32	25.54
6.294	0.32	22.57
9.291	0.36	20.74
12.288	0.42	19.93
16.784	0.48	20.47
19.781	0.51	22.15
22.778	0.54	25.31
25.775	0.58	31.28
30.270	0.64	34.79
33.267	0.69	29.22
36.264	0.75	27.63
39.261	0.81	28.73
42.258	0.87	32.22
49.751	1.07	21.92
60.240	1.47	19.52
67.733	1.98	31.14
69.231	2.19	25.29
70.730	2.50	19.43
72.228	3.00	14.48
73.727	3.80	10.45
75.225	5.03	7.34
76.724	6.74	5.13
81.219	13.66	2.10
103.697	43.80	0.56
105.195	45.39	0.54
109.691	50.01	0.51
120.180	60.53	0.46
135.165	84.08	0.44
136.664	90.76	0.44
138.162	87.61	0.44
139.661	83.24	0.44
168.132	68.62	0.44
195.105	65.57	0.44
225.075	63.39	0.42
273.027	61.18	0.41
300.000	60.22	0.42

Product Control:

Crystek Part Number:	CLPFL-0070-BNC	Release Date:	25-Jul-2017
Revision Level:	D	Responsible:	K. Piotrowicz

Rev D
Page 3 of 3

