



Electrical specifications

Center Frequency: 904.5 MHz
Bandwidth: 5 MHz
Input / Output Impedance: 50 Ohms
Passband: 902-907 MHz
Passband Insertion Loss: TYP 1.5dB
2.5dB MAX
Passband Ripple: < 0.2 dB
Passband Return Loss: 18dB
Rejection: @ 909-920 MHz: 30dB


Mechanical

Mounting Method: Threaded Mounting Holes
Connector Type: N-Type (F)
Dimensions: 198 x 98 x 60 mm.

Environmental

Operating Temperature: -45 to +85 deg.C
Storage Temperature: -55 to +95 deg.C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

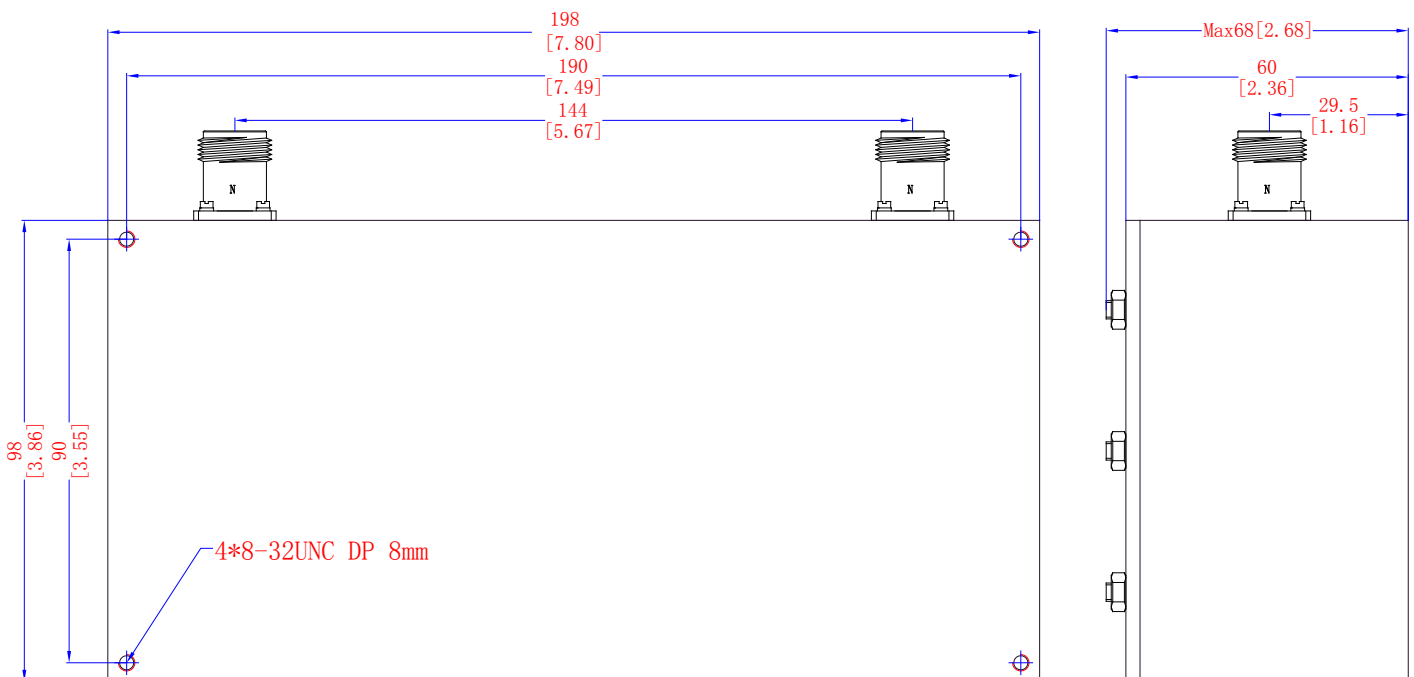




ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

904.5MHz Cavity Bandpass Filter

Part Number: AB904B528



Response Plot:

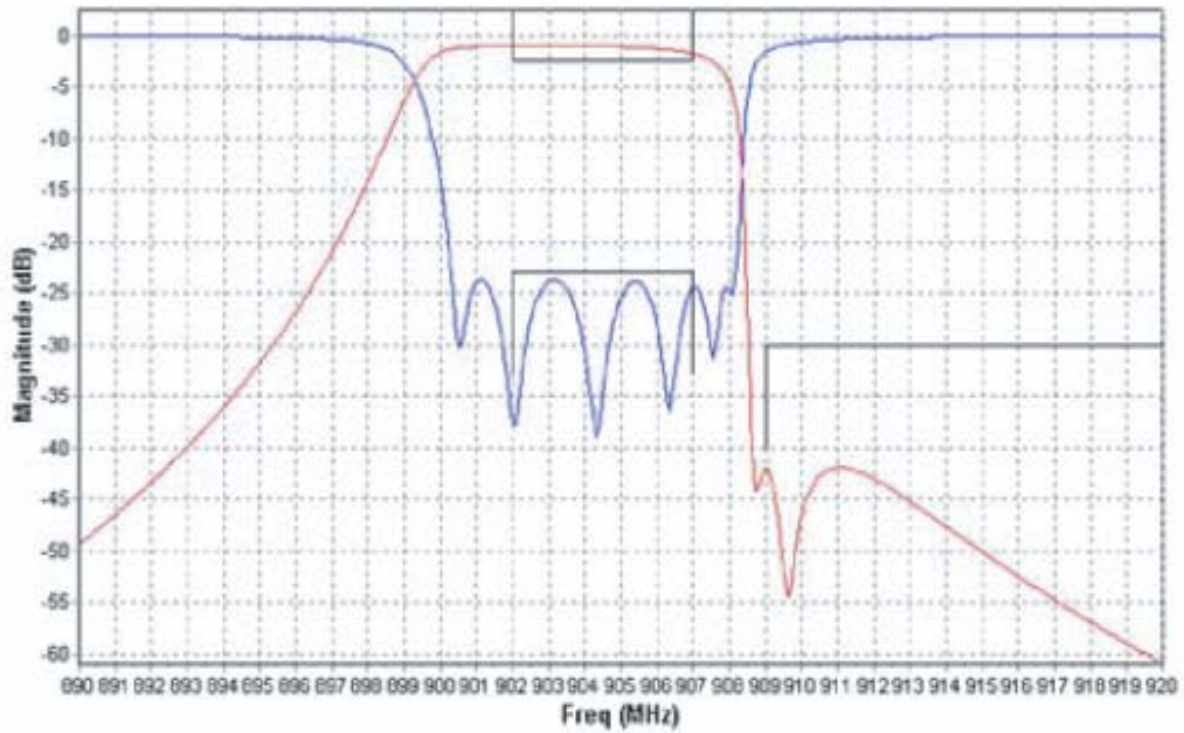

Available at our Web store:

70 Outwater Lane Phone: (973) 772-4242
Garfield, NJ 07026 Fax : (973) 772-4646



Email: sales@anatechelectronics.com
Web: www.anatechelectronics.com