



Electrical specifications

Center Frequency: 2305 MHz
Bandwidth: 10 MHz
Input / Output Impedance: 50 Ohms
Passband: 2300 – 2310 MHz
Passband variation over bandwidth: <0.5 dB
Passband Insertion Loss: <1.0 dB
Passband Ripple: <0.2 dB
Passband Return Loss: >18 dB
Group delay variation over bandwidth: <15 ns
Rejection: 13 MHz offset from Center Frequency > 20 dBc
Rejection 2: 20 MHz offset from Center Frequency > 30 dBc
Power Handling: 20 W (avg)
Peak Power Handling: 150 W


Mechanical

Mounting Method: Threaded Mounting Holes
Connector Type: SMA Female
Dimensions: 6.19 x 5.52 x 1.58 in

Environmental

Operating Temperature: 0 to +50 deg.C
Storage Temperature: -55 to +95 deg.C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

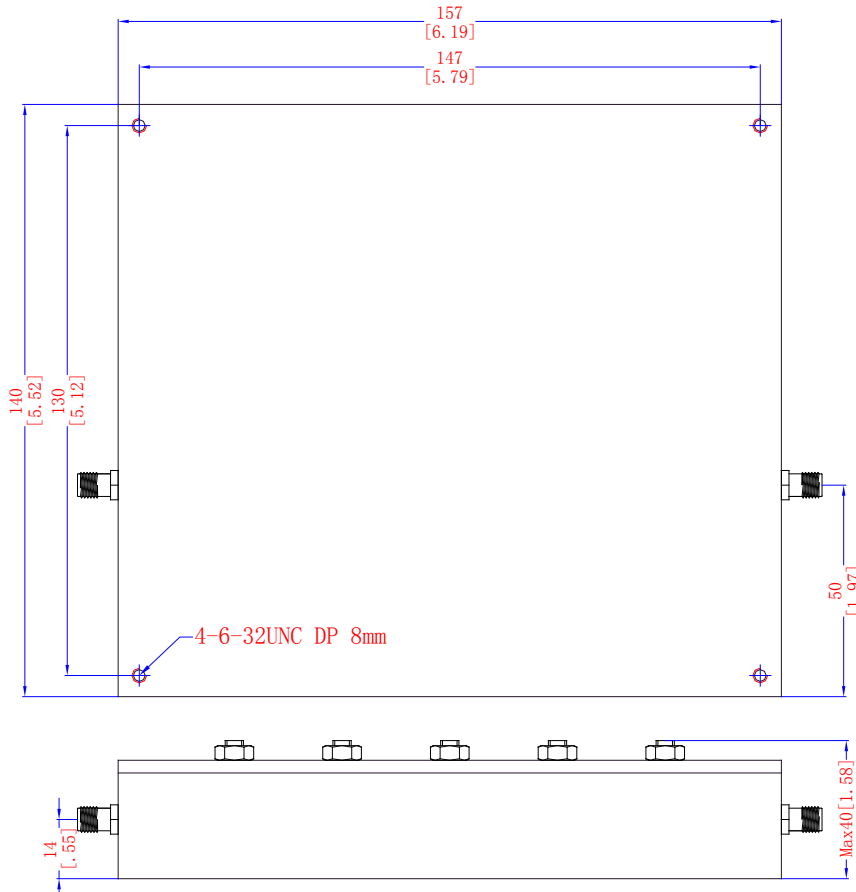




ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

2300-2310 MHz Cavity Filter

Part Number: AB2305B993



Response Plot:

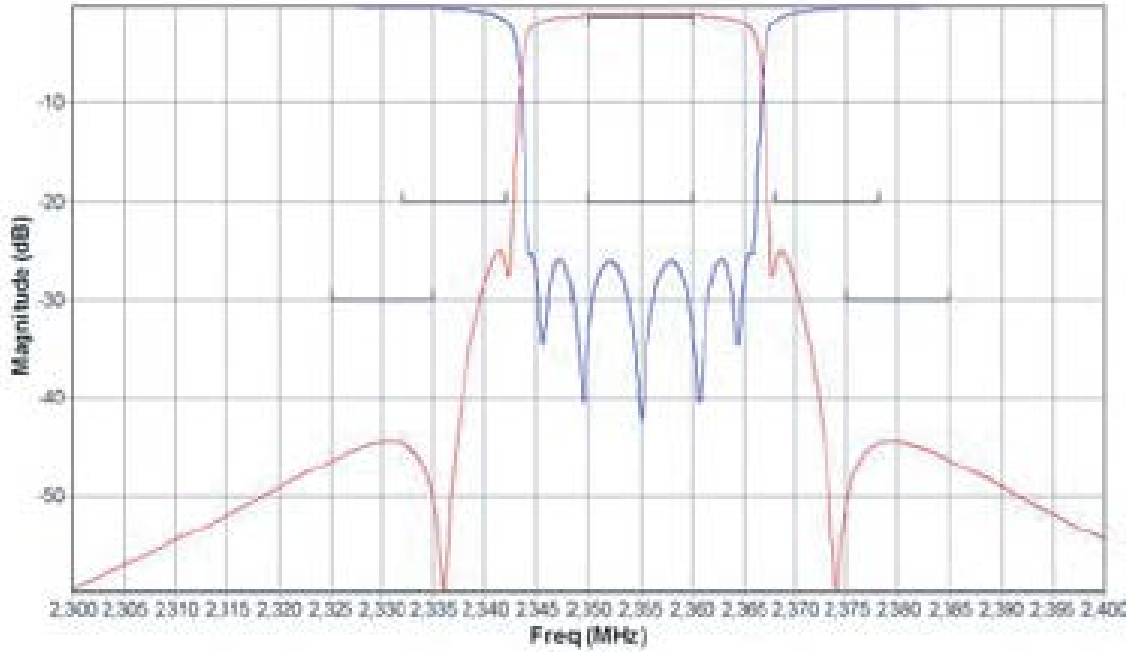

Available at our Web store:

70 Outwater Lane Phone: (973) 772-4242
Garfield, NJ 07026 Fax : (973) 772-4646



Email: sales@anatechelectronics.com
Web: www.anatechelectronics.com