



Electrical specifications

Passband: 418-448MHz
Passband Ins. Loss: =/ <1.5 dB
Return Loss Over Passband: >17 dB
Rejection1: =/ >40 dB@1-350MHz
Rejection2: =/ >40 dB@530-2000MHz
Input/Output Impedance: 75 Ohms


Mechanical

Mounting Method: Threaded Mounting
Connector Type: BNC(F)/BNC(M)
Dimensions: 2.5" x 1.125" x 0.75" in

Environmental

Operating Temperature: -45°C to +85°C
Storage Temperature: -55°C to +100°C

Outline Drawing:

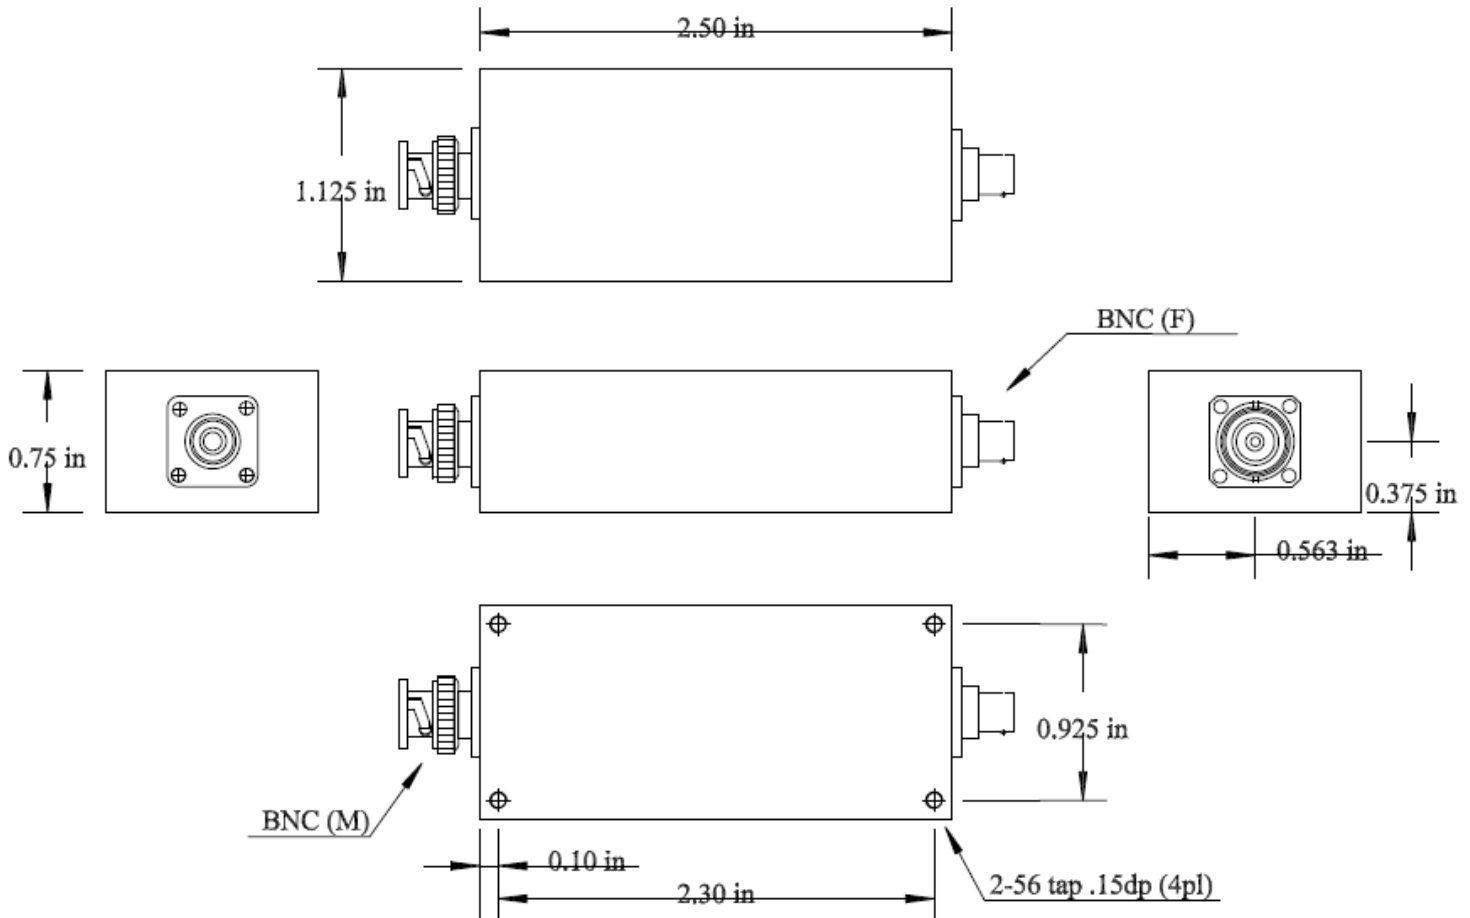



Response Plot:

