



Electrical specifications

Center Frequency: 250 MHz
Passband (Pb): 55 MHz
Ins. Loss in Pb: 1.5dB
Insertions loss in Pb: 1.5dB
Rejection 1: $\geq 40\text{dB}@216\text{MHz}$
Rejection 2: $\geq 40\text{dB}@290\text{MHz}$
Power: 50W


Mechanical

Mounting Method: Threaded Mounting
Connector Type: SMA (F)
Dimensions: 4.50" x 1.50" x 0.63"

Environmental

Operating Temperature: -40°C to $+75^{\circ}\text{C}$
Storage Temperature: -55°C to $+100^{\circ}\text{C}$

Outline Drawing:

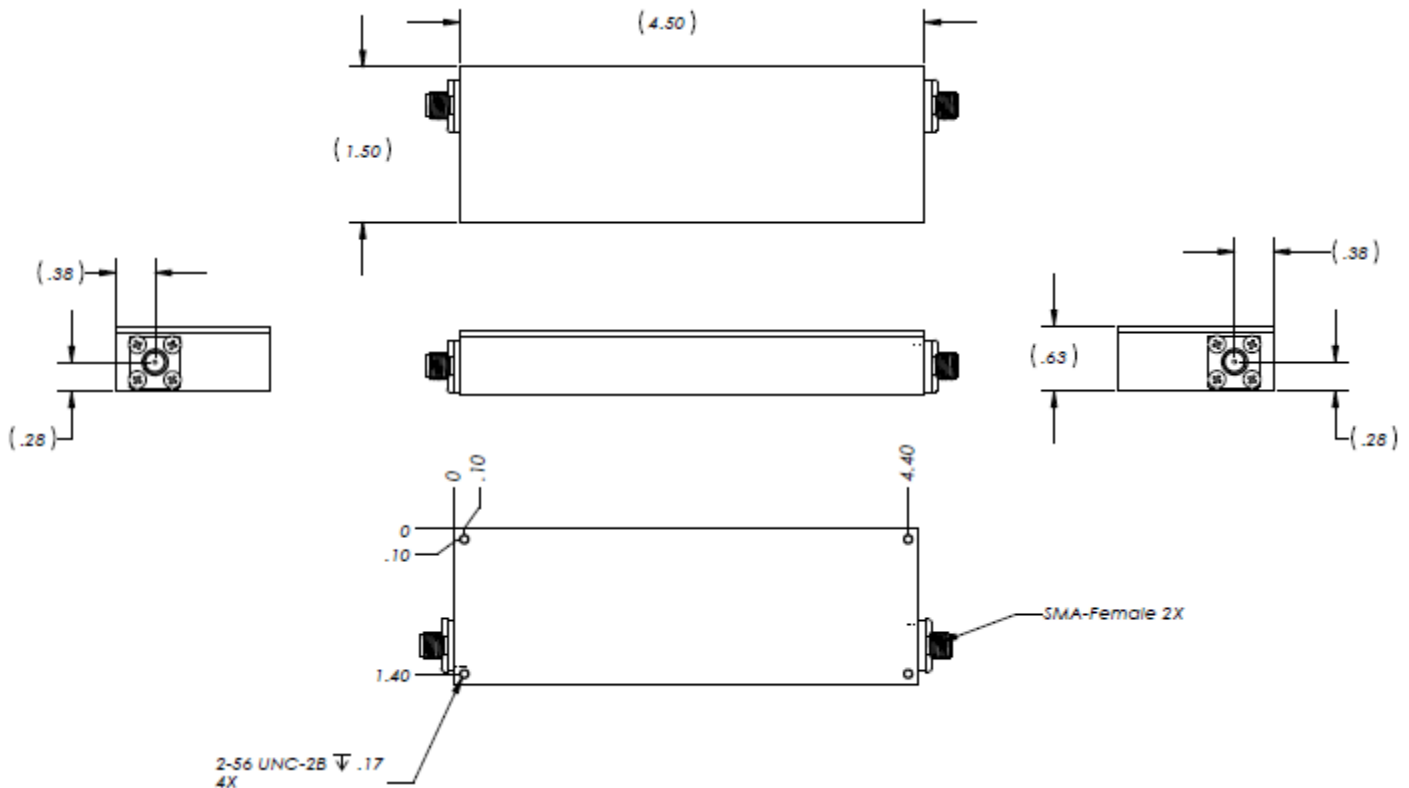



Response Plot:

