



Electrical specifications

Center Frequency: 36 MHz
Bandwidth: 10 MHz
Passband: 31.16-41.16 MHz
Insertion Loss: 1.0 dB Max
Return Loss: 14 dB Min
Passband Phase Match: <10 Deg (4 Filters)
Rejection: >50 dB @ 0-19.16 MHz
 >50 dB @ 53.16-1000 MHz


Mechanical

Dimensions: 2.5 x 1.0 x 0.6 inches

Environmental

Operating Temperature: -40 to +70° C

Outline Drawing:

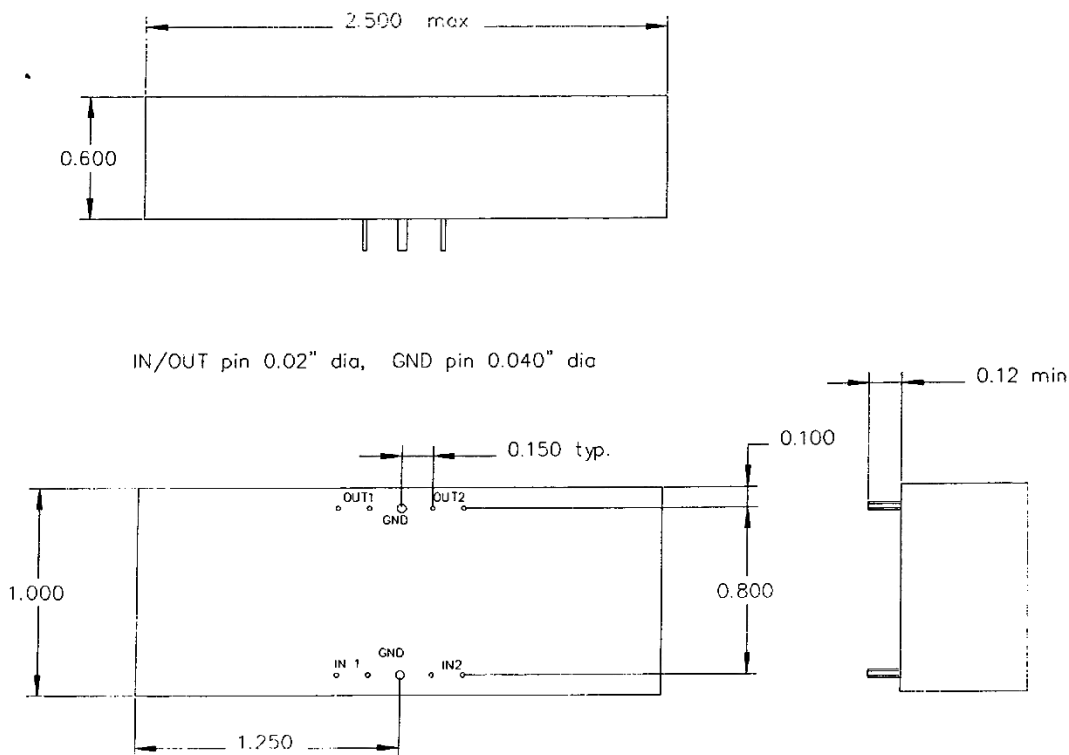

DWG: 98/124 ajs 6/25/03
 Outline Drawing
 Anatech Electronics Inc