



**Electrical Specifications**

**Reject Band:** 2110-2170 MHz  
**Reject Attenuation:** 30 dB Min  
**Passband:** 800-2095 & 2185-2700 MHz  
**Passband Loss:** 1.5 dB Max @ 800-2075 MHz  
                   1.5 dB Max @ 2205-2700 MHz  
                   2.5 dB Max @ 2075-2095 MHz  
                   2.5 dB Max @ 2185-2205 MHz  
**Return Loss in Passband:** 14 dB Min  
**VSWR:** 1.5:1 Max


**Mechanical**

**Connector Type:** SMA (F)  
**Dimensions:** 9.84 x 2.36 x 1.57 Inches

**Environmental**

**Operating Temperature:** -40 to +40° C

**Outline Drawing:**

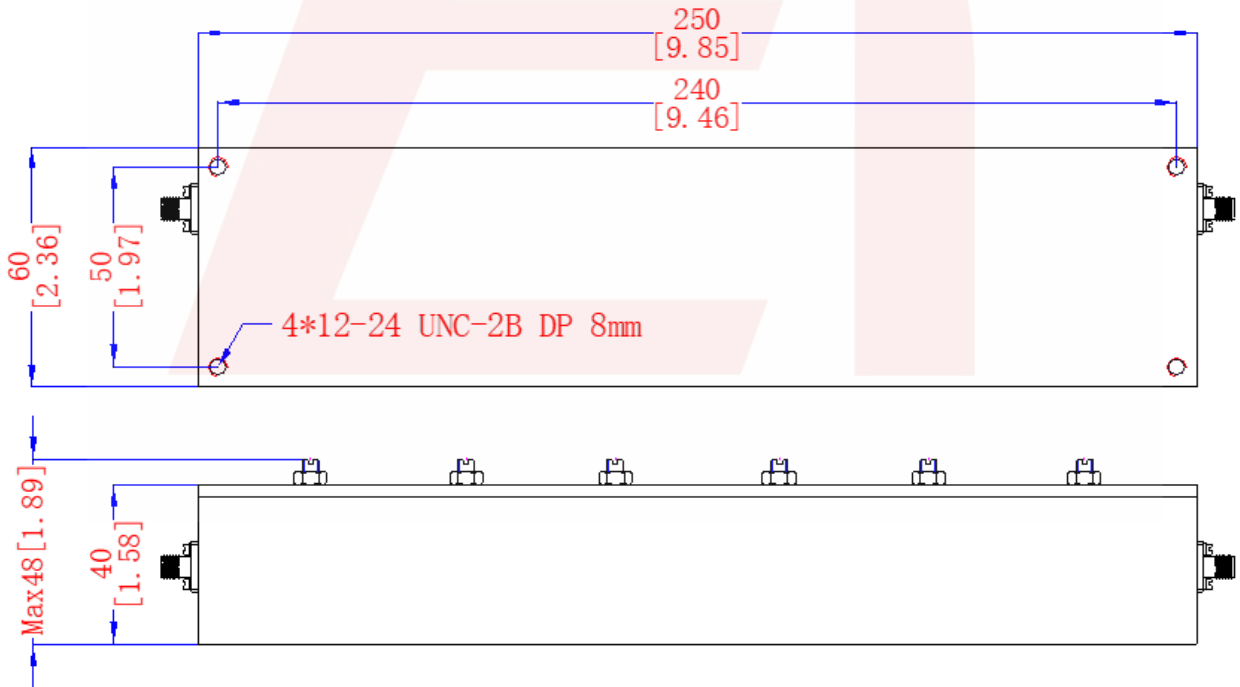



### Response Plot:

