

SPECIFICATIONS:

Material: Phosphor Bronze, Tin plated

Current Rating: 9A



Voltage rating: 300VAC

Wire size: 0.2-0.75mm² / 24-18AWG solid wire

Strip length: 6 - 7mm

Operating temperature: -40°C ~ +125°C

Packaging: Tape & Reel, 2500 pcs per reel.

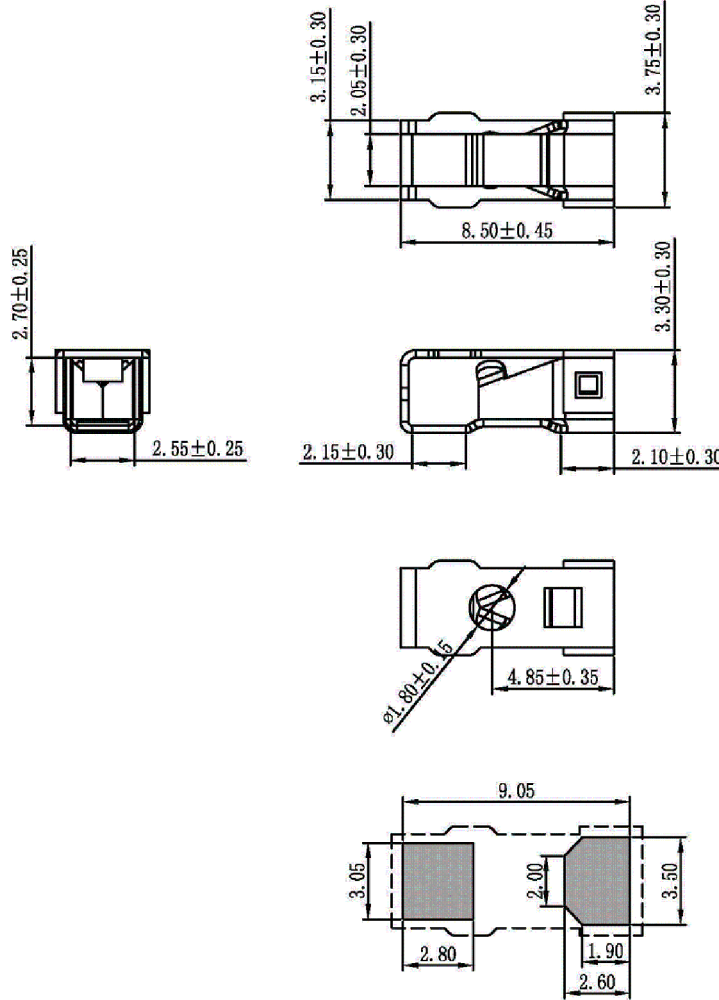

| | | | | | |
|-----|-----------|------------------------------|------|-----|------|
| REV | REVISIONS | | CHNG | CHK | APPR |
| | DATE | CHANGE | | | |
| | 9/16/19 | REVISED SPECS AND DIMENSIONS | | | PB |
| | A | | | | |

| | |
|---|---------|
| TOLERANCE UNLESS OTHERWISE SPECIFIED | |
| X | ± 1 |
| X.X | ± 0.4 |
| X.XX | ± 0.20 |
| DRAWN BY | PB |
| DATE: | 9/12/19 |
| CHECK BY | - |
| DATE: | - |
| APPR BY | |
| DATE: | |

Power Dynamics, Inc.
 Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: METAL SMD PCB TERMINAL BLOCK
 SINGLE POLE

PD-B14C

ALL DIMENSIONS FOR REFERENCE ONLY

SCALE: NTS

SHEET 1 of 1
 REV: A