
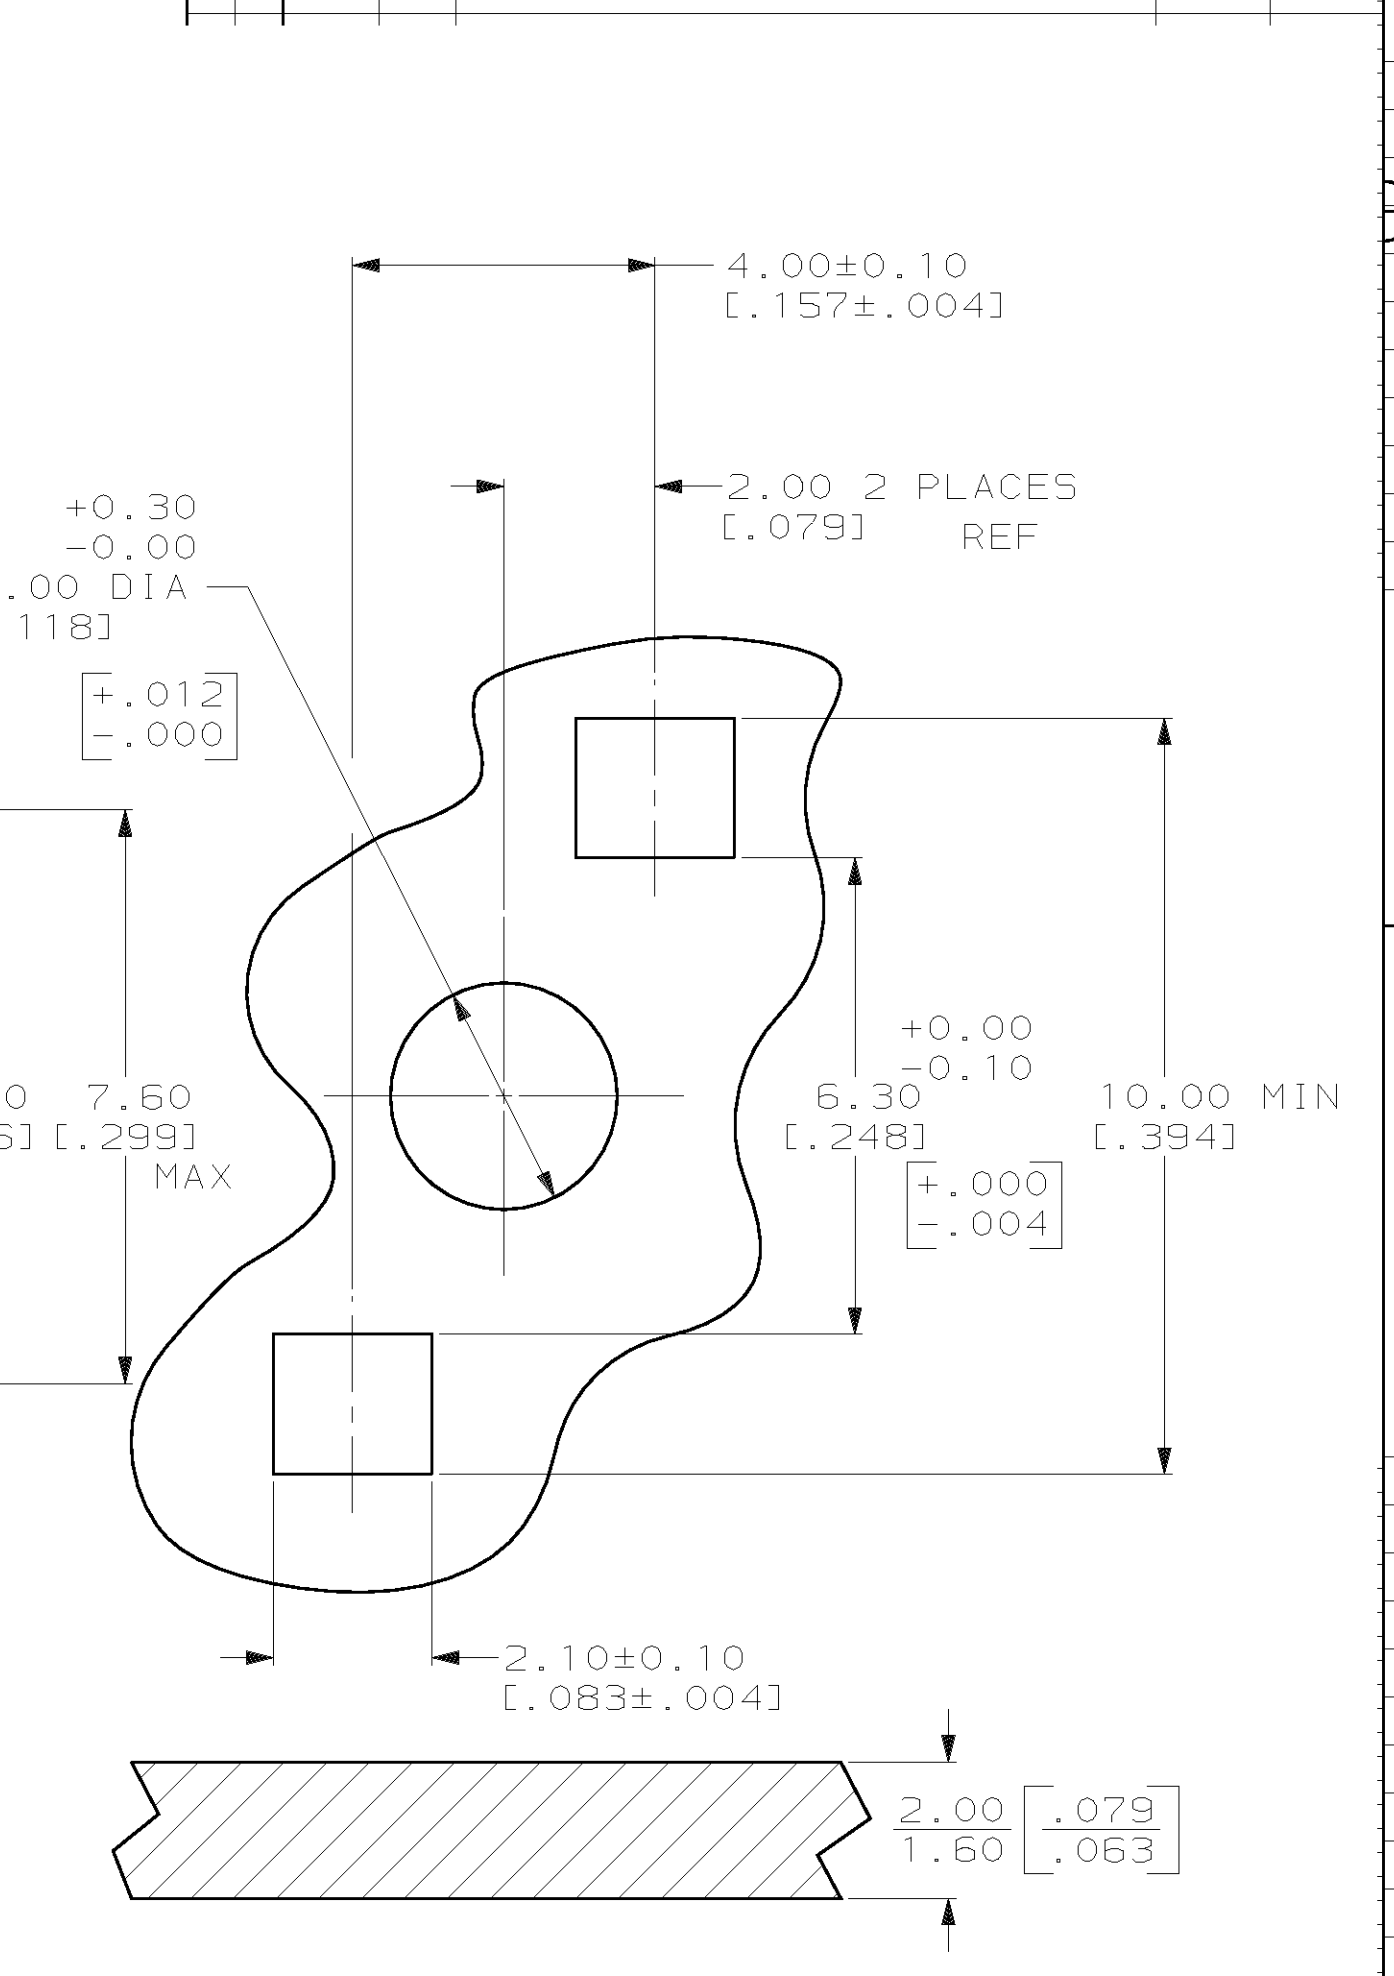
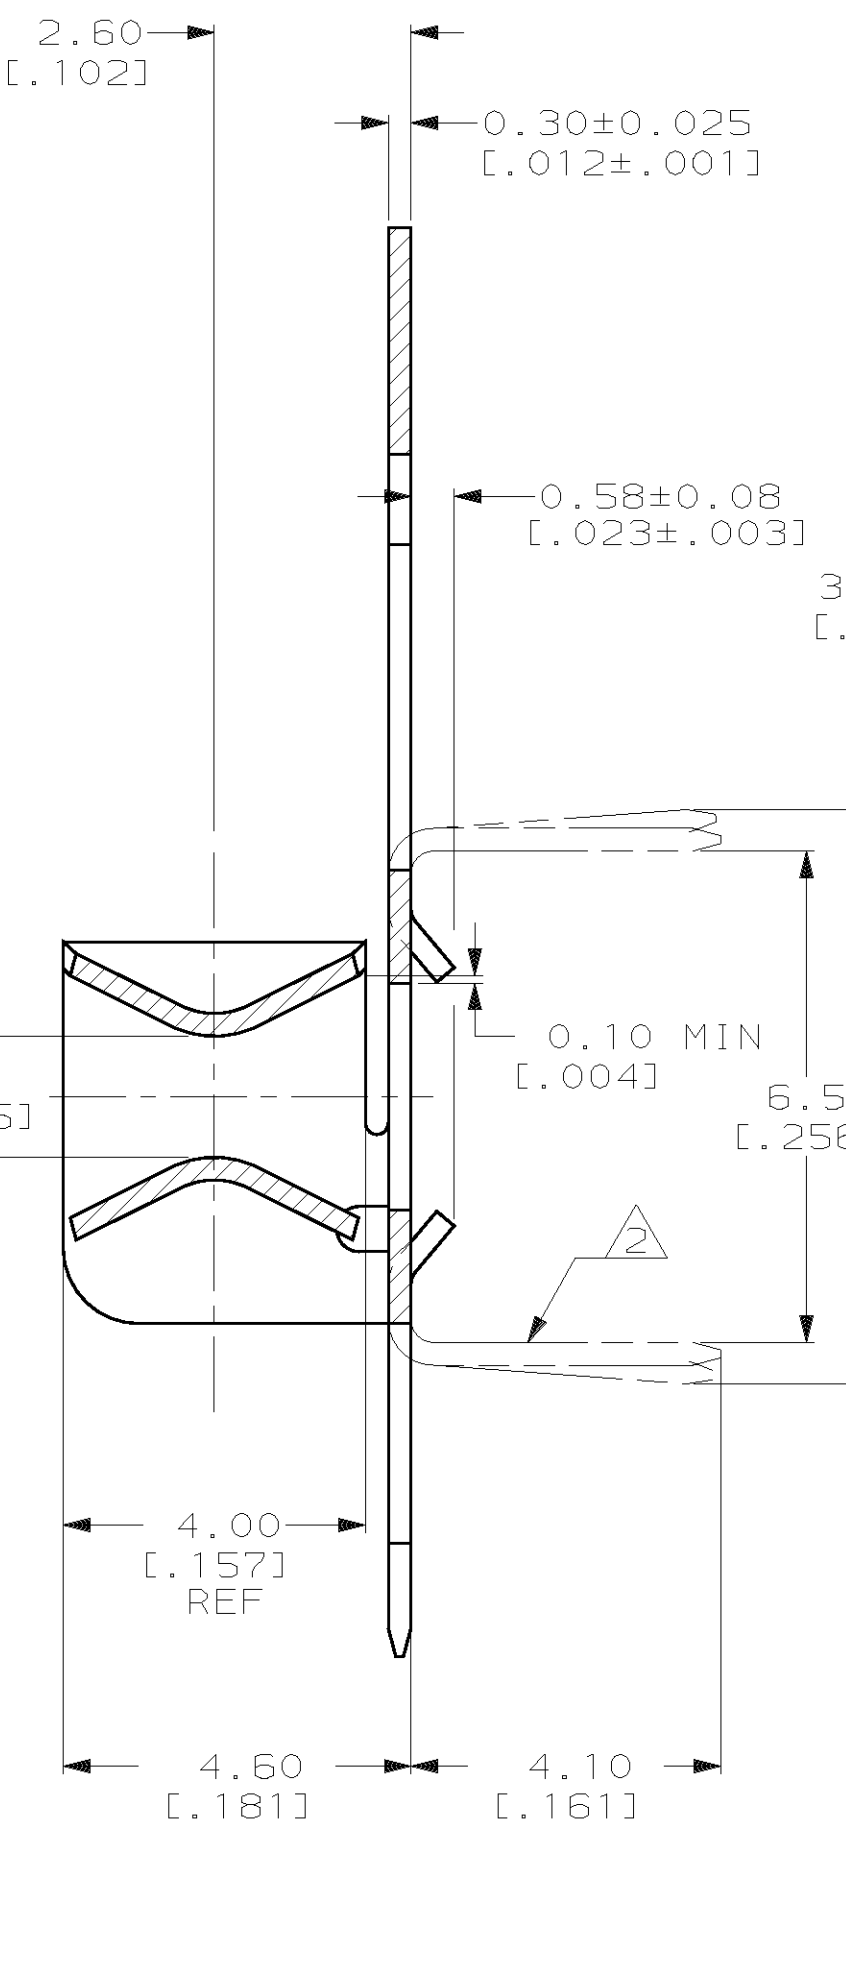


LOC		DIST		P		F		ZONE		LTR		REVISIONS		DATE	APPD
AF	50														
												E	ADD -2 PER 0L10-0469-97	12/JAN/98	PF/JW

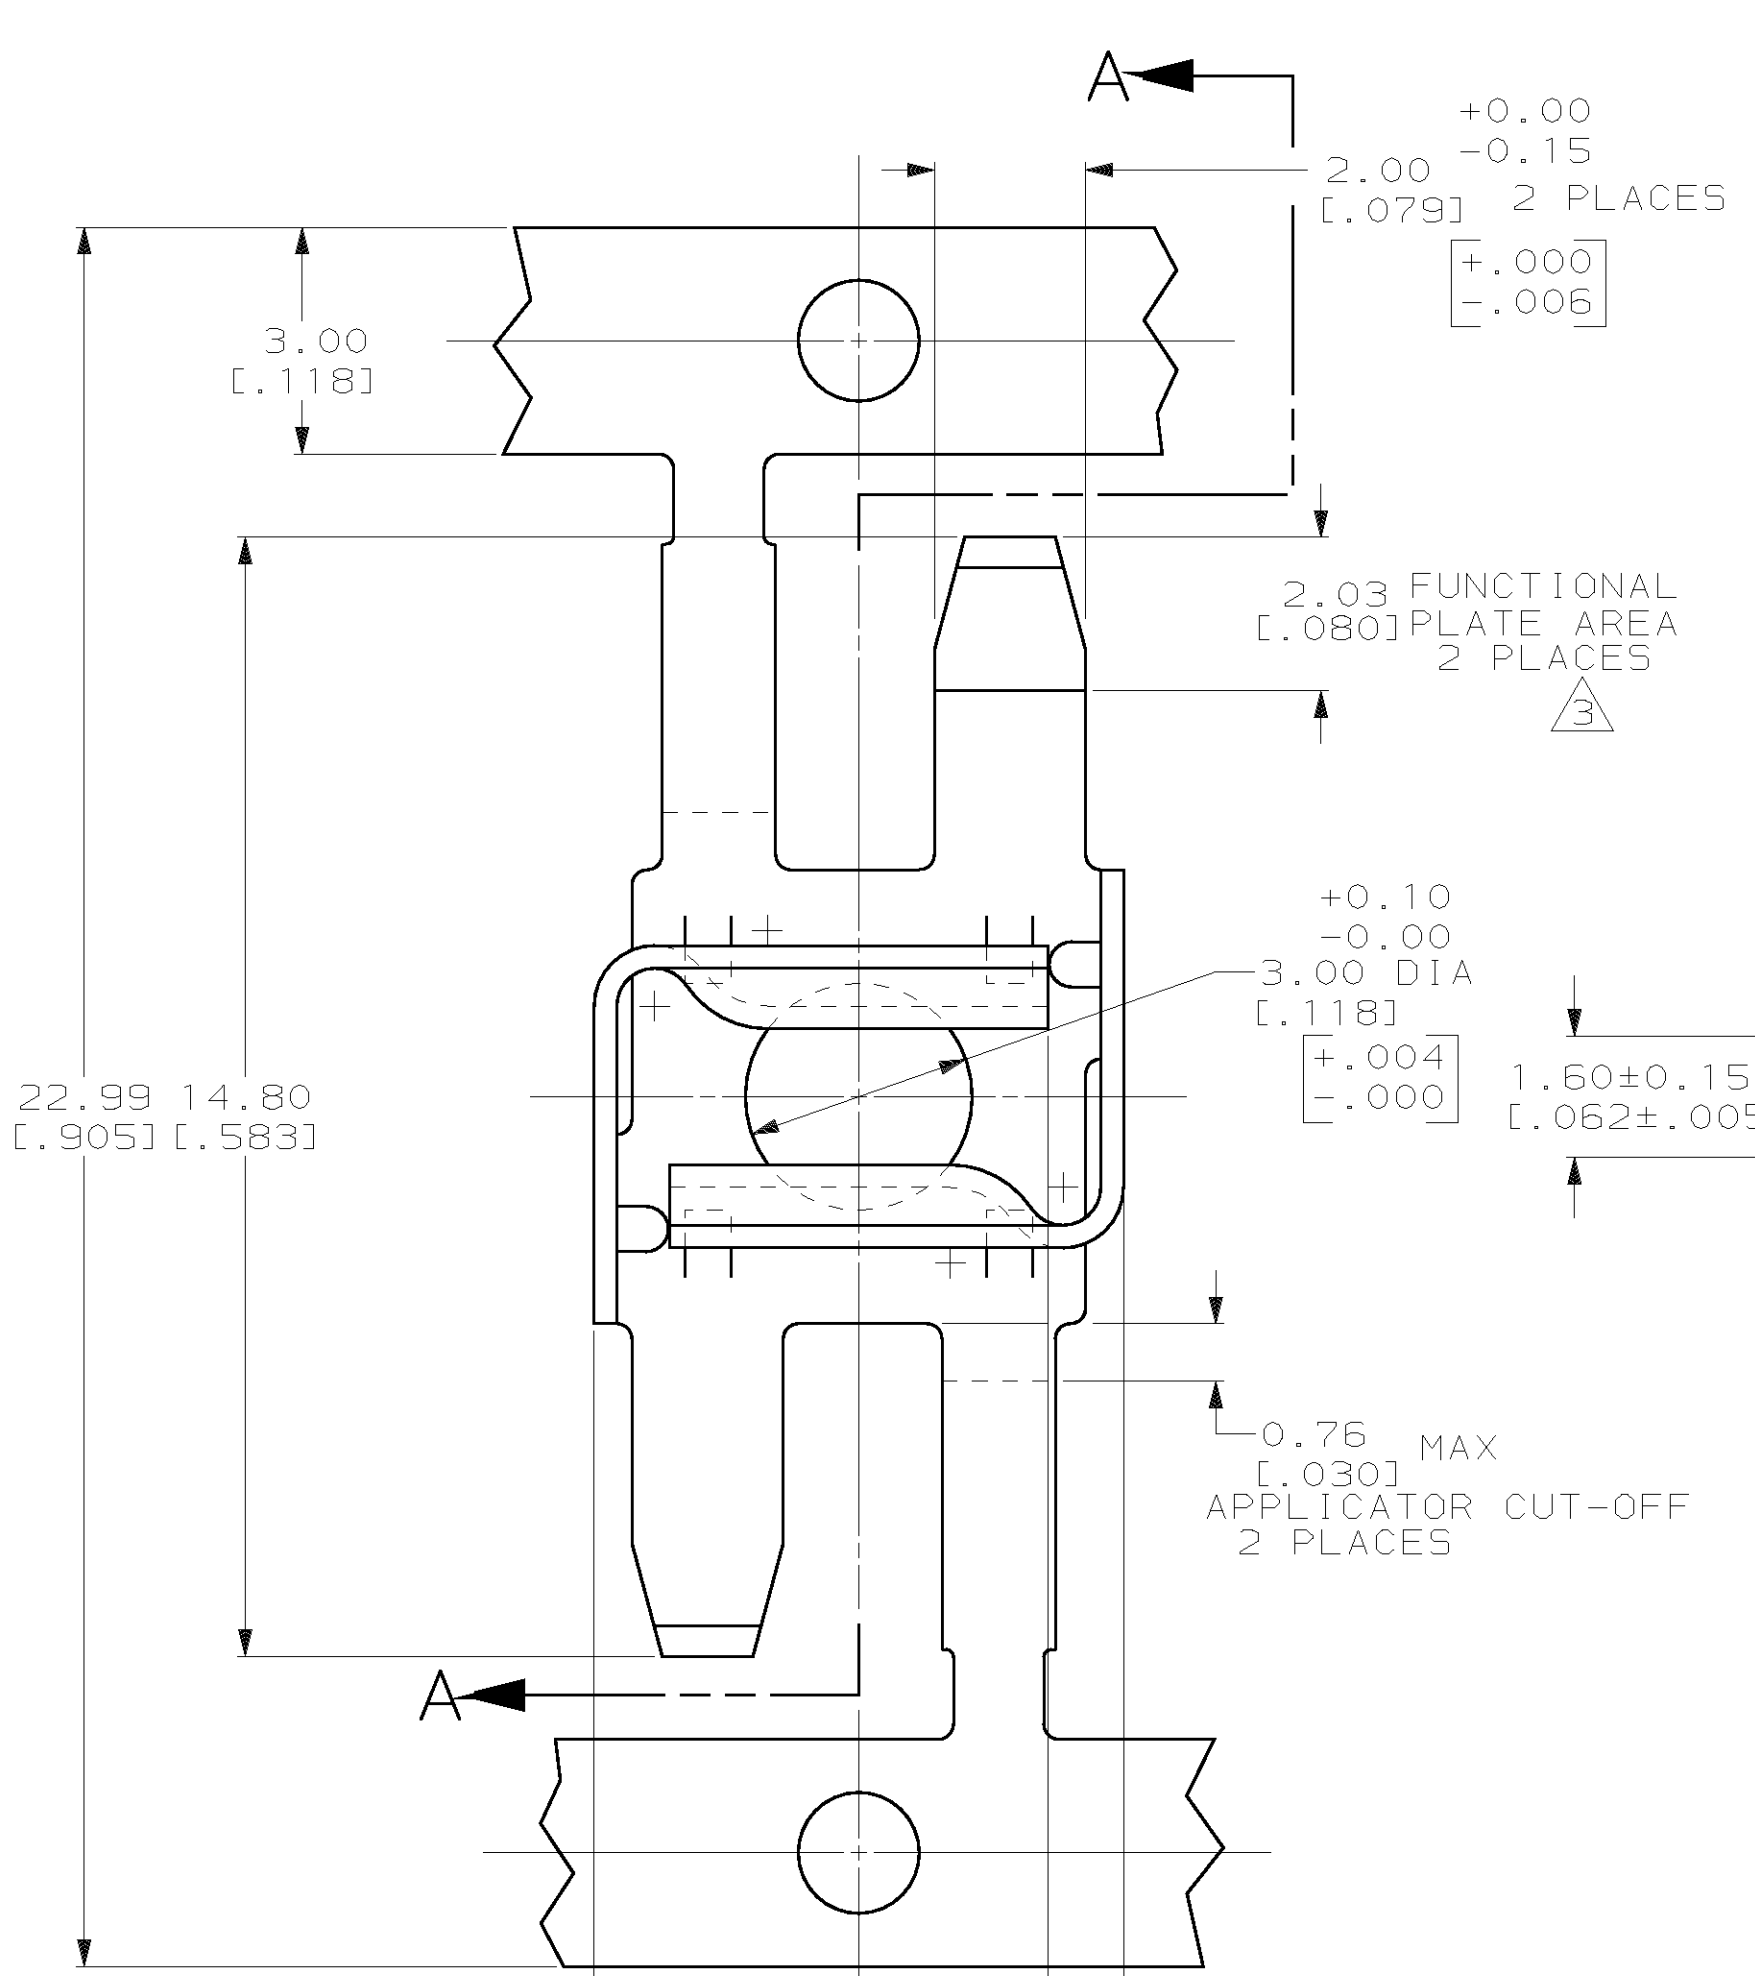

- 1 CONTINUOUS STRIP ON REELS.
- 2 TINES BENT 90° IN APPLICATOR PRIOR TO ASSEMBLY INTO P.C. BOARD.
- 3 0.00508 [.000200] MIN TIN IN FUNCTIONAL PLATE AREA, 0.00254 [.000100] MIN TIN ON REMAINDER.
- 4 PRODUCT COMPLIES WITH AMP SOLDERABILITY SPEC 109-11-5. WHEN PLATED AND 109-11-1 AFTER TWO YEARS OF SHELF LIFE

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON :	DR 2/2/90 MICHAEL S. FEHER
2 PLC DEC \pm -	CHK 2/5/90 JR RUTH
3 PLC DEC ± 0.25 [0.010]	APPD 2/13/90 D. SCHWENK
ANGLES $\pm 1^\circ$	APPD 2/19/90 TERRY L. SHUTTER
MATERIAL	PRODUCT SPEC
#4 HARD PHOSPHOR BRONZE	-
FINISH	APPLICATION SPEC
	-
	WEIGHT
	-

TRAVERSE WOUND	63566-2
NORMAL	63566-1
REELING	PART NO
AMP AMP INCORPORATED Harrisburg, Pa. 17105	
NAME PIN RECEPTACLE, PRINTED CIRCUIT BOARD, 2.25 [.088]-2.36 [.093] DIA	
SIZE	CAGE CODE
C	00779
DRAWING NO	63566
SCALE	10:1
SHEET	1 OF 1