

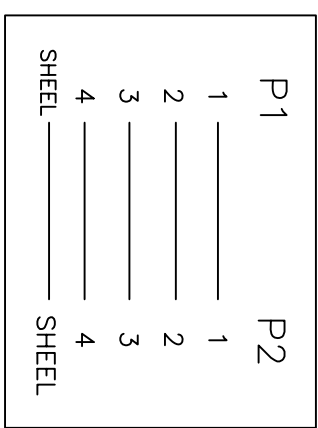

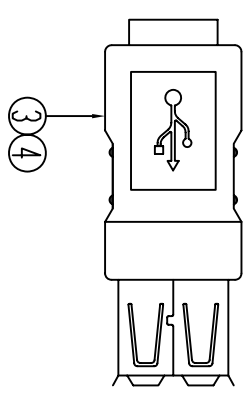


UNIT:mm

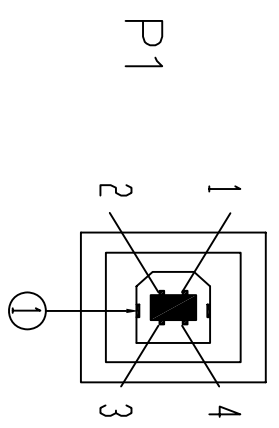

Electronic Test:  
 1. 100% Test,(Open,Short,Miss Wire)  
 2. Contact Resistance:3 ohm max.  
 3. Insulation Resistance:20M ohm min.  
 4. Hi-Pot:300V DC/10ms

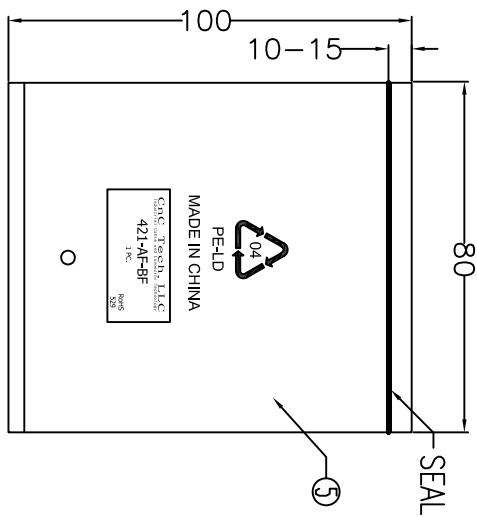

**CnC Tech, LLC**  
 Industrial Cable and Connector Technology

⑥	PE BAG	1/10	CLEAR SIZE:170*250*0.05mm PRINT BLACK"MADE IN CHINA"10PCS"及印生产周期,有透气孔.
⑤	PE BAG	1	CLEAR SIZE: 80*100*0.05mm PRINT BLACK"MADE IN CHINA"1"PC"及印生产周期,有透气孔.
④	OUT JACKET	6g	BEIGE(V-29) 40P PVC(MOULD NO:WM-163)
④	IN JACKET	4g	CLEAR LDPE()(MOULD NO:NM-75)
③	CABLE	5	28AWG 电子线, L=30MM
②	CONN	1	USB A FEMALE:SHELL NICKEL PIN GOLD FLASH SHORT BODY
①	CONN	1	USB B FEMALE:SHELL NICKEL PIN GOLD FLASH SHORT BODY
NO.	NAME	Q'TY	SPECIFICATION

DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	421-AF-BF
DECIDE BY		DATE	2012-02-27
VERSIONS/EDITION	A/0	PROJECTION	