

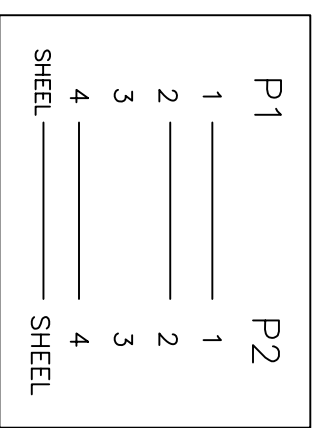

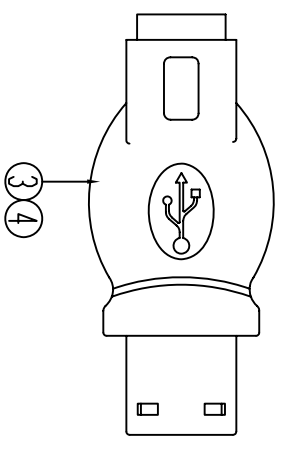


UNIT:mm

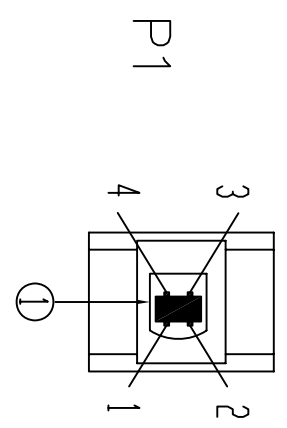

Electronic Test:
 1.100% Test,(Open,Short,Miss Wire)
 2.Contact Resistance:3 ohm max.
 3.Insulation Resistance:20M ohm min.
 4.Hi-Pot:300V DC/10ms

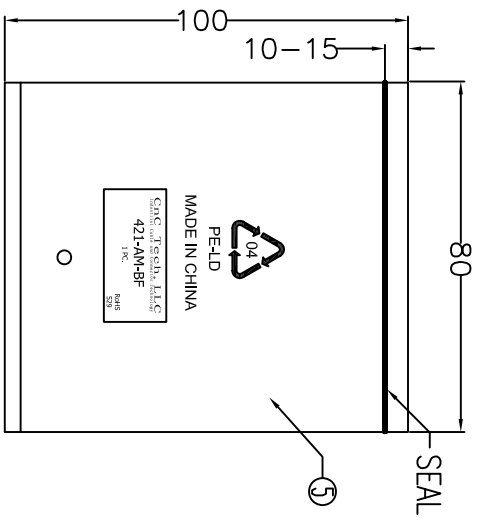

CNC Tech, LLC

Industrial Cable and Connector Technology

⑥	PE BAG	1/10	CLEAR SIZE:170*250*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"及印生产周期,有透气孔.
⑤	PE BAG	1	CLEAR SIZE: 80*100*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"及印生产周期,有透气孔.
④	OUT JACKET	6g	BEIGE(V-29) 40P PVC(MOULD NO:WM-161)
④	IN JACKET	4g	CLEAR LDPE(X)(MOULD NO:NM-73)
③	CABLE	3	28AWG 电子线, L=30MM
②	CONN	1	USB A MALE:SHELL NICKEL PIN GOLD FLASH SHORT BODY
①	CONN	1	USB B FEMALE:SHELL NICKEL PIN GOLD FLASH SHORT BODY
NO.	NAME	Q'TY	

DRAWN BY		ZHONGHS	DRAWING NO.	
CHECKED BY			CUSTOMER	
APPROVAL BY			ITEM NO.	
DECIDE BY			DATE	
VERSIONS/EDITION		A/0	PROJECTION	
			2012-02-27	

