

1

2

3

4

5

6

7

A

A

B

B

C

C

D

D

E

E

F


F

G

G

H

H

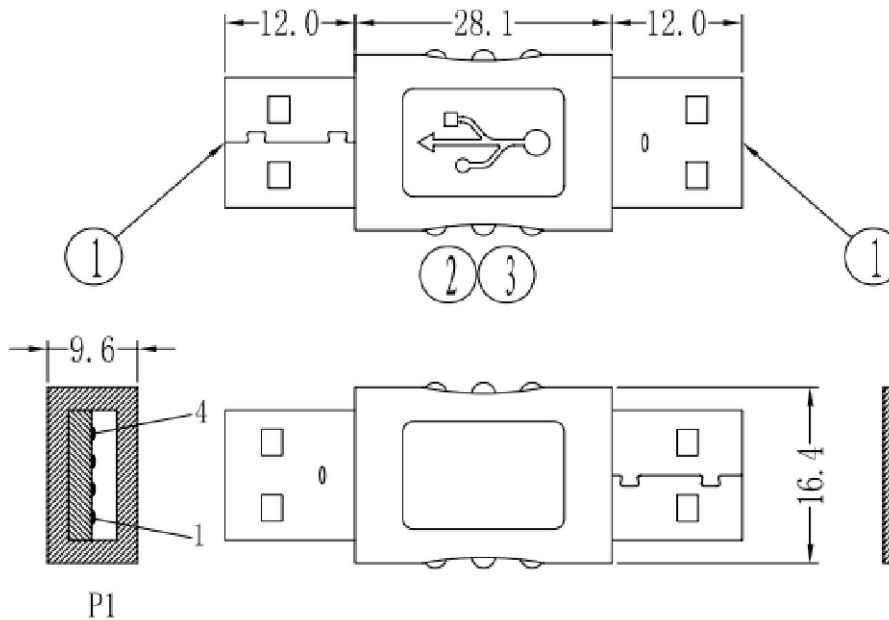

- ① **Electronic test:**
- 1.100% test(open,short,miss wire)
 - 2.contact resistance:3 ohm max.
 - 3.insulation resistance:5M ohm min.
 - 4.Hi-pot: 300V DC/10ms
 - 5.Voltage rating: 30V
 - 5.Current rating: 1.5A
- ① **Mechanical:**
- 1.Mating force: 3.57Kgf max
 - 2.Unmating force: 1.02Kgf min
 - 3.Operating temperature: -5 °C~60°C
- Packaging: PE bag

PIN ASSIGNMENT	
P1	P2
1	1
2	2
3	3
4	4
S	S

3	out jacket	BEIGE(IV-29) 45P PVC	6g
2	cable	UL1007 28AWG L=30MM	3
1	conn	USB A MALE,SHELL NICKEL MATERIAL STEEL, PIN GOLD MATERIAL BRASS, FLASH SHORT BODY INSULATOR COLOR:WHITE	2
NO	PART NO	DESCRIPTION	QTY

RoHS compliant
Unit:: mm

Scale	FREE				Date	Name	Customer-No.
TOLERANCE					Drawn	10.07.2015	Joanna
X.	±X				Approved	27.11.2019	Carson
X.X	±X						
X.XX	±X						
DIM	TOL	① Update	27.11.2019	Carson			
ANGLE	±X°	② Drawn	10.07.2015	Joanna			
Angle	TOL	Id.	Modification	Date			

ASSMANN WSW-No. A-USB-5	
Drawing-No. ASS 7432 CA	rev01
Replace	Sheet

1

2

3

4

5

6

7