

Rev	AWO #	Description	Date	Appr
-		RELEASED	01/23/14	

6

5

4






3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

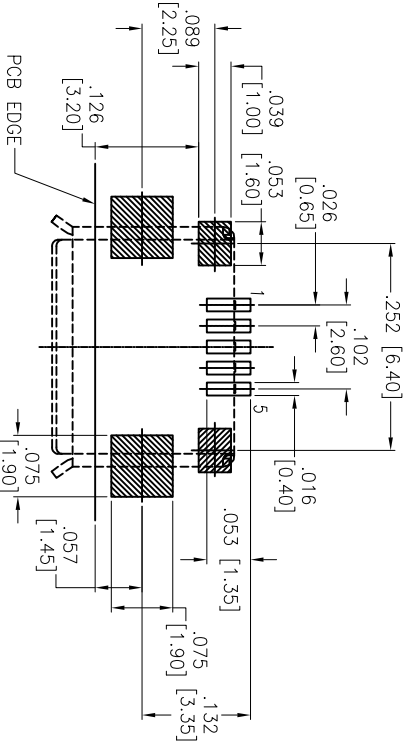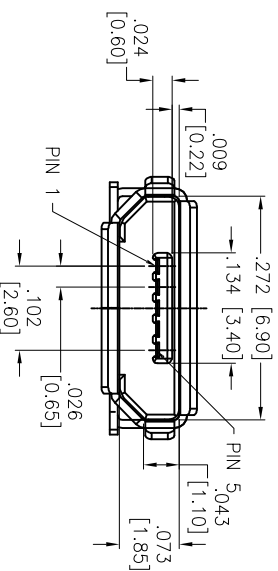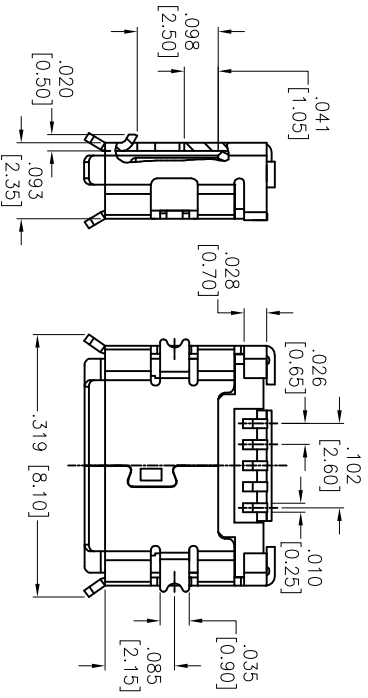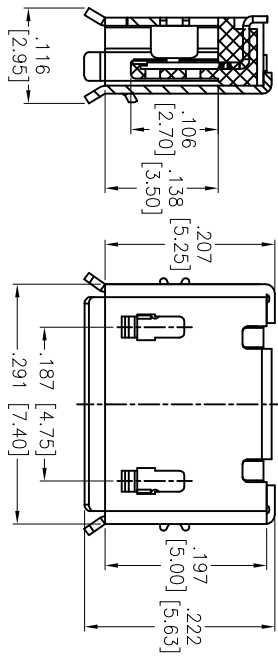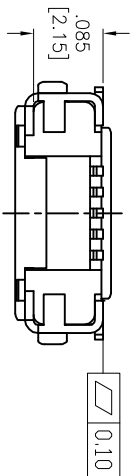

B

B

SPECIFICATIONS:
Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
Contacts: Copper Alloy
Shell: Copper Alloy, Nickel plated
Plating: Gold over Nickel underplate in contact area, Matte Tin or over Nickel underplate on solder tails
Electrical: Current rating: 1A Max.
 Contact resistance: 50 milliohms max.
 Insulation resistance: 100 Megohms min.
 Dielectric withstand voltage: 100 VAC for 1 minute
Temperature Rating: Operating temperature: -30°C to +80°C
Environmental: Lead free, RoHS compliant.

PACKAGED ON TAPE & REEL

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

MICRO USB, TYPE B, SINGLE PORT
FEMALE, TRUE SMT TYPE, TAPE & REEL

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLEES
 .X ± .10 ØXX ± .10
 .XX ± .020 ØXXX ± .015
 .XXX ± .015 ØXXXX ± .010
 APPROVALS DATE

DRAWN	HR	01/23/14
CHECKED	YC	01/23/14
APPROVED		

SIZE	PART NO.	REV.
X	MCR-B-S-RA-TSMT-NP-CS4-TR	-
REF: S00097C	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1

A

A

