

6

5

4






3

2

1

APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/3/08	
A		UPDATE DRAWING	10/13/16	AY/SC

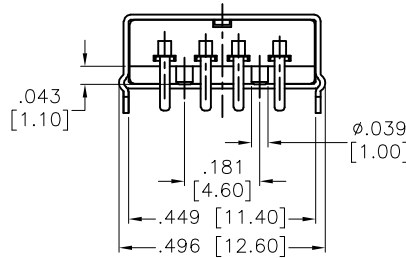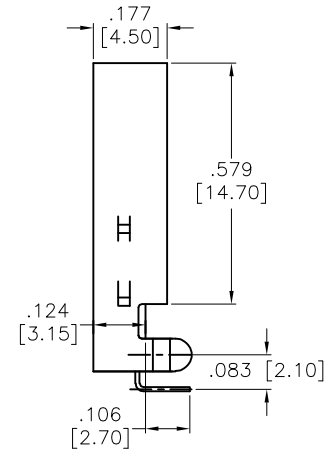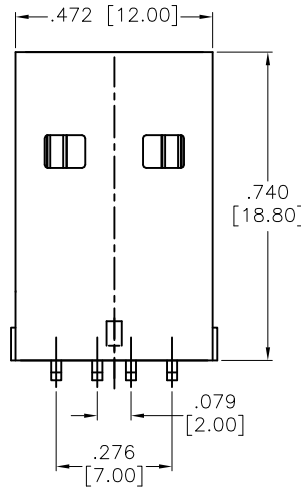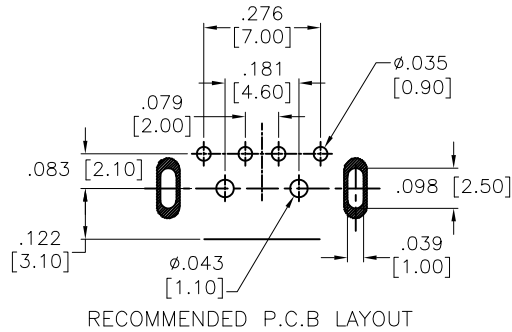

SPECIFICATIONS:

Material:
 Insulator: PA66, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Shell: SPCC, Nickel plated

Plating:
 Gold flash over Nickel underplate on contact area,
 Tin over Nickel underplate on PCB tails

Electrical:
 Voltage rating: 30 VAC.
 Current rating: 1.5 Amp.
 Contact resistance: 30 mohms max.
 Insulation resistance: 1,000 Mohms min.
 Dielectric withstanding voltage: 500 VAC
 Temperature Rating:
 Operating temperature: -20°C to +60°C
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010		ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS		DATE	
DRAWN	SS	12/3/08	
CHECKED			
APPROVED			
TITLE		USB CONNECTOR, A TYPE PLUG	
SIZE	PART NO.	REV.	
X	USB-AP-S-RA	A	
REF:	S00005C	SCALE:	NTS
		SHEET 1 OF 1	

6

5

4

3

2

1