



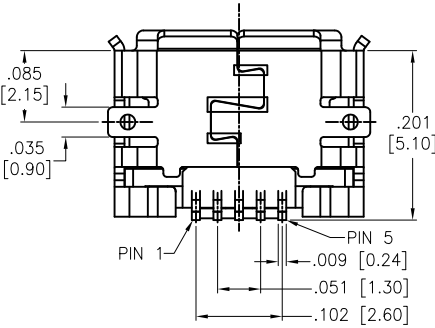
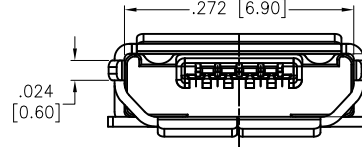


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	02/15/12	
A		REDRAWN	02/17/12	
B		UPDATED DRAWING	9/21/17	HR/RC1

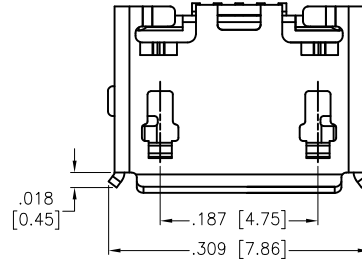

SPECIFICATIONS:
 Material:
 Insulator: LCP, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy
 Shell: Stainless Steel, Matte Tin plated
 Plating:
 Gold Flash over Nickel underplate on contact area,
 Gold Flash over Nickel underplate on solder tails
 Electrical:
 Contact resistance: 30 mohms max.
 Insulation resistance: 1,000 Mohms min.
 Dielectric withstanding voltage: 100 VAC for 1 minute
 Environmental:
 Lead free, RoHS compliant.

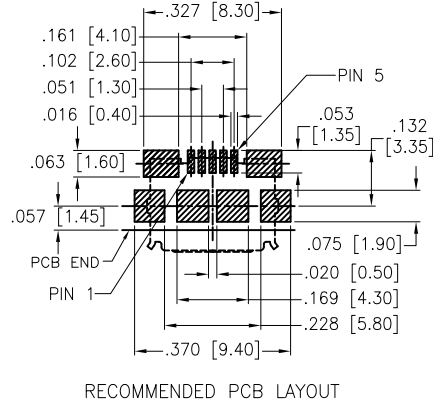

PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010
APPROVALS		DATE	
DRAWN	TW	02/15/12	
CHECKED	AY	02/15/12	
APPROVED			

ADAM TECH			
909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
TITLE: MICRO USB, TYPE B, SINGLE PORT RIGHT ANGLE, SMT, TAPE AND REEL			
SIZE X	PART NO. MCR-B-S-RA-TSMT-NP-CS2-T/R	REV. B	
REF: S00015C	SCALE: NTS	SHEET 1 OF 1	