

High Frequency Ceramic Solutions

900 MHz Low Pass Filter

P/N 0892LP07A0136

Detail Specification: 5/15/2018

Page 1 of 2

General Specifications

Part Number	0892LP07A0136	Return Loss	9.5 dB min.
Frequency (MHz)	824 - 960	Impedance	50 Ω
Insertion Loss	0.7 dB max.	Operating Temperature	-40 to +85°C
Attenuation (min.)	18 dB @ 1648 - 1920 MHz	Reel Quantity	10,000
Attenuation (min.)	25 dB @ 2472 - 2880 MHz	Input Power	500 mW max.
Attenuation (min.)	25 dB @ 3296 - 3840 MHz		

Part Number Explanation



P/N Suffix	Packaging Style	Bulk	Suffix = S	Eg. 0892LP07A0136S
		T & R	Suffix = T	Eg. 0892LP07A0136T
	Termination	AgPt	Suffix = None	Eg. 0892LP07A0136(S or T)
	EVB Board	0892LP07A0136-EB-SMA (2 female SMA connectors)		

Terminal Configuration

No	Function
1	GND
2	OUT
3	GND
4	IN

Mechanical Dimensions

	In	mm
L	0.039 ± 0.002	1.00 ± 0.05
W	0.020 ± 0.002	0.50 ± 0.05
T	0.015 ± 0.002	0.38 ± 0.05
a	0.006 ± 0.004	0.15 ± 0.10
b	0.010 ± 0.004	0.25 ± 0.10

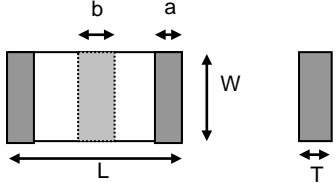



Mounting Considerations

Mount these devices with brown mark facing up.

Line width should be designed to provide 50 Ω impedance matching characteristics.

Units: mm

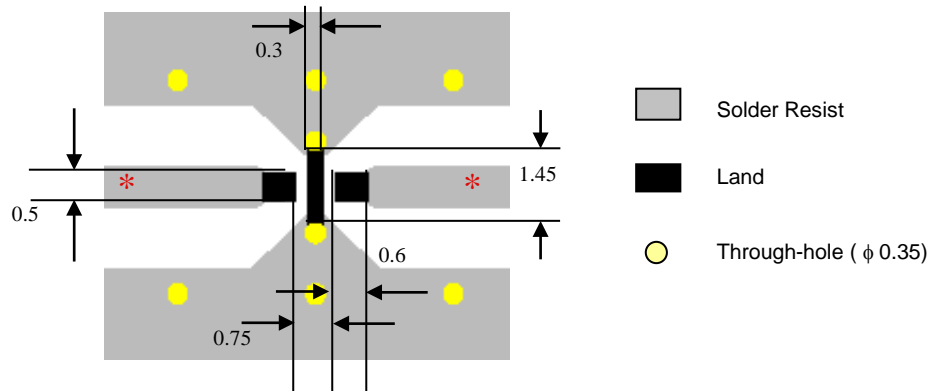

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

High Frequency Ceramic Solutions


900 MHz Low Pass Filter

P/N 0892LP07A0136

Detail Specification: 5/15/2018

Page 2 of 2

Typical Electrical Performance (T=25°C)

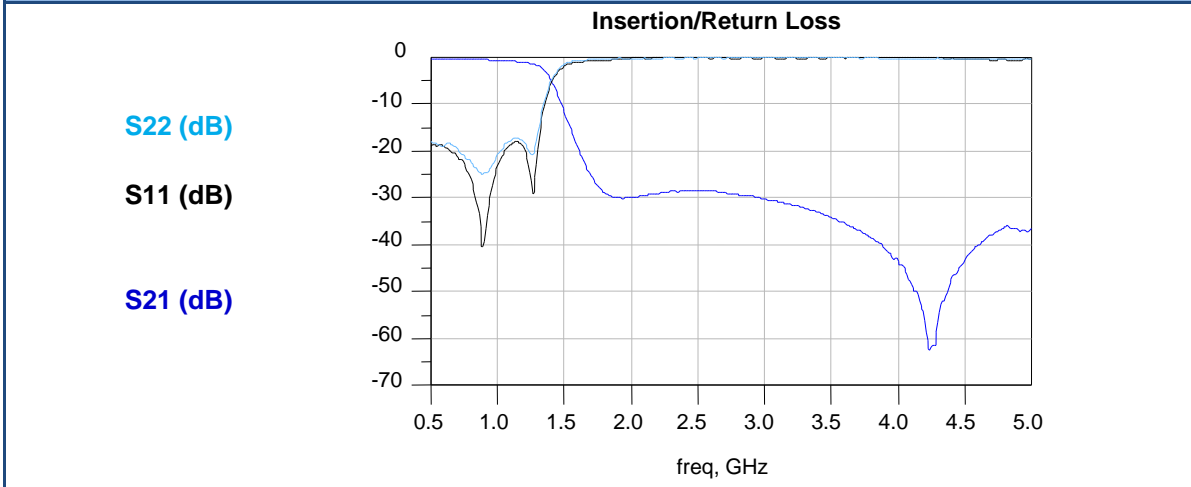

Packaging information

www.johansontechnology.com/tape-reel-packaging

Soldering Information

www.johansontechnology.com/typical-soldering-profile.html

RoHS Compliance

www.johansontechnology.com/rohs-compliance

MSL Info

www.johansontechnology.com/msl-rating

To Download Measured S-parameters for Evaluation and Simulation:

www.johansontechnology.com/low-pass-filters

For layout review contact our Applications Team at:

www.johansontechnology.com/ask-a-question

Mini SMD Chip Antennas at:

www.johansontechnology.com/antennas

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



Ver 1.0

www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

2018 Johanson Technology, Inc. All Rights Reserved