




**0-4 GHz Lowpass Filter**

**Part Number: AE4000L9095**

Passband:	0-4 GHz
Passband Insertion Loss @ 0-4 GHz:	<1dB
Return Loss @ Passband:	>15dB min.
Rejection:	>50dB @ 7.2-18 GHz
Connector Type:	3.5 mm (M to F)
Dimensions:	2.5 x 1.125 x 1 inches

**Outline Drawing:**

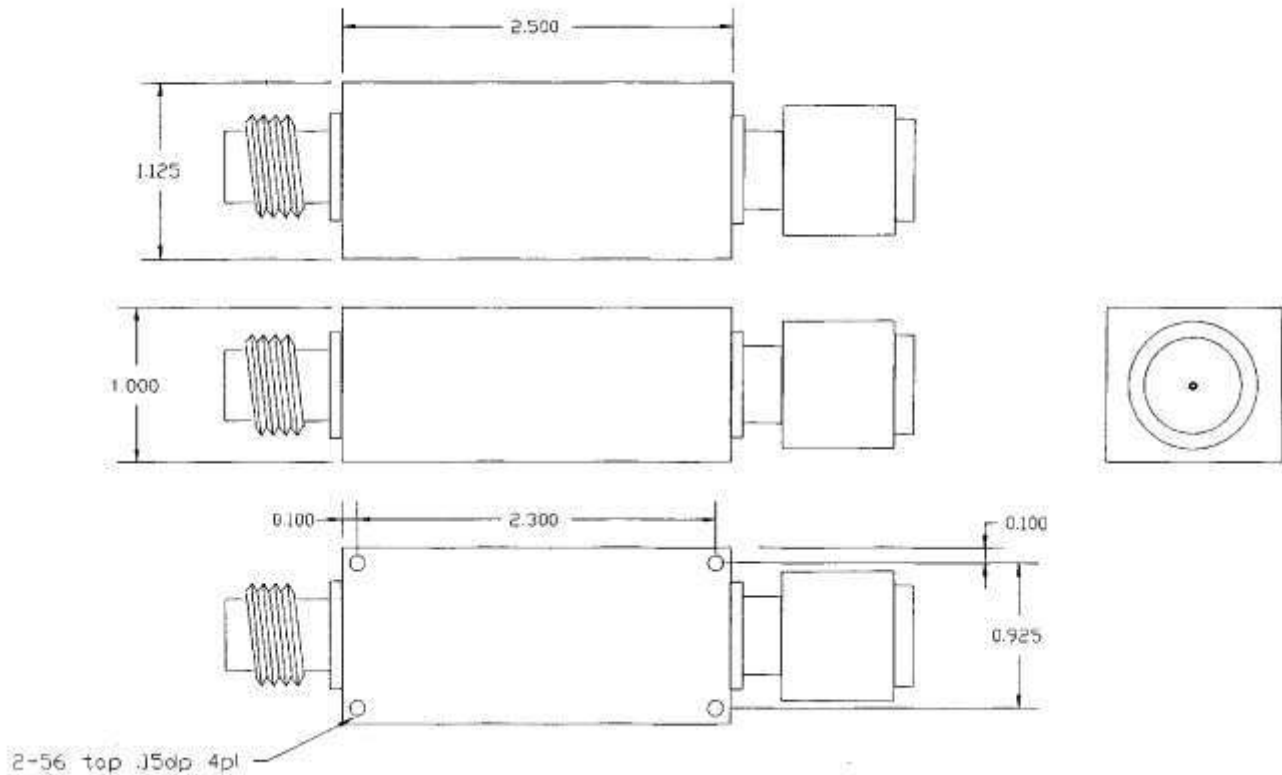



**0-4 GHz Lowpass Filter**

**Part Number: AE4000L9095**

**Response Plot:**

