



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

412.5 MHz Bandpass Filter

Part Number: AE412.5B6744



Electrical Specifications

Center Frequency: 412.5 MHz
Passband: <1 dB @ 393 MHz to 432 MHz
Return Loss: >14dB @ 393 MHz to 432 MHz
Insertion Loss: <2 dB @ 412.5 MHz
Ripple: 0.1dB @ 393 MHz to 432 MHz
Impedance: 50 Ohms
Rejection: > 50 dB @ 787 MHz to 1300 MHz
Rejection2: > 20 dB @ 0-330 MHz


Mechanical

Mounting Method: Through Holes
Connector Type: SMA
Dimensions: 2.1" X 0.85" x 0.43" in.

Environmental

Operating Temperature: -25°C to +70°C
Storage Temperature: -40°C to +90°C
Shock: 10 G. 11ms
Vibration: 10 G. 5 to 200Hz

Outline Drawing:

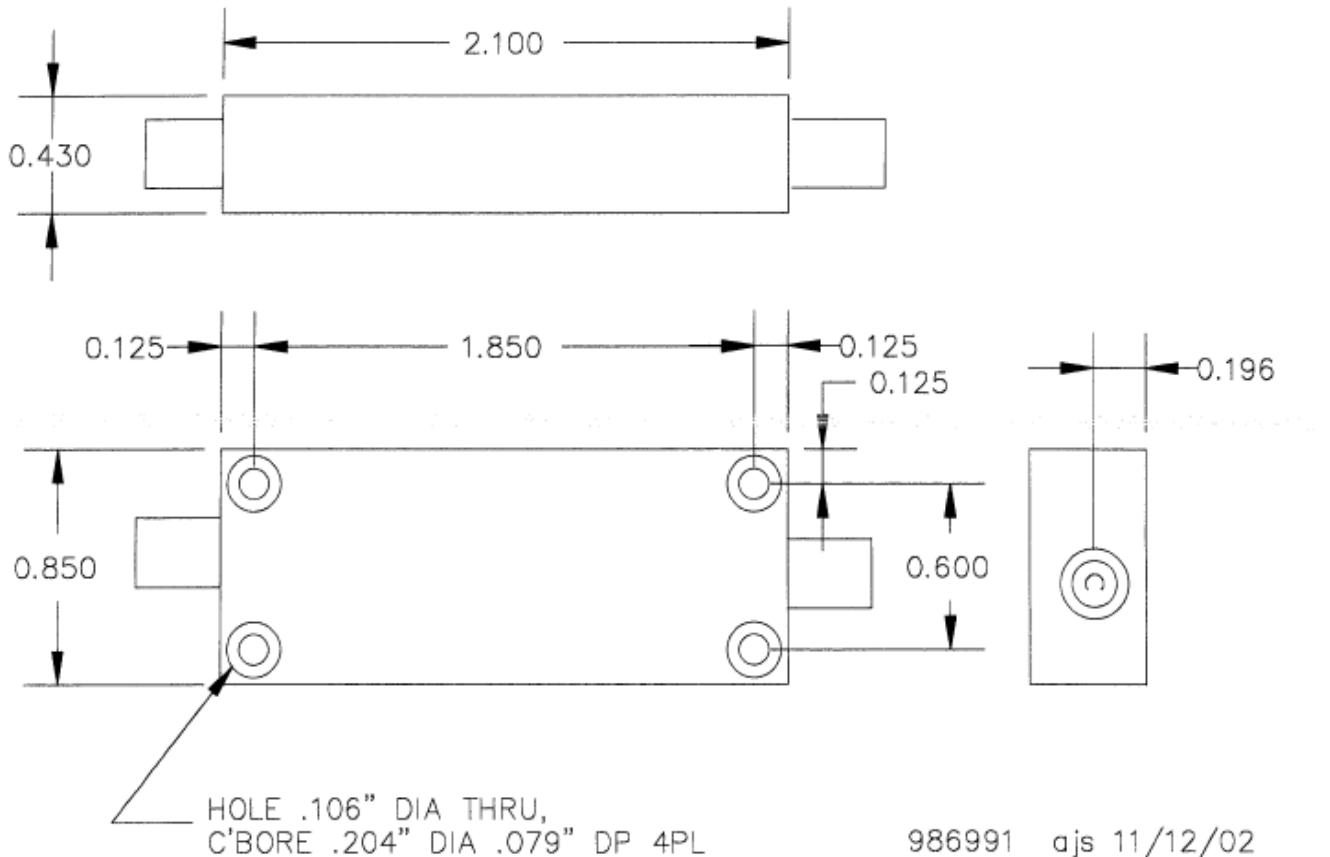

986991 ajs 11/12/02
Outline Drawing
Anatech Electronics Inc.



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

412.5 MHz Bandpass Filter

Part Number: AE412.5B6744



Response Plot:

