


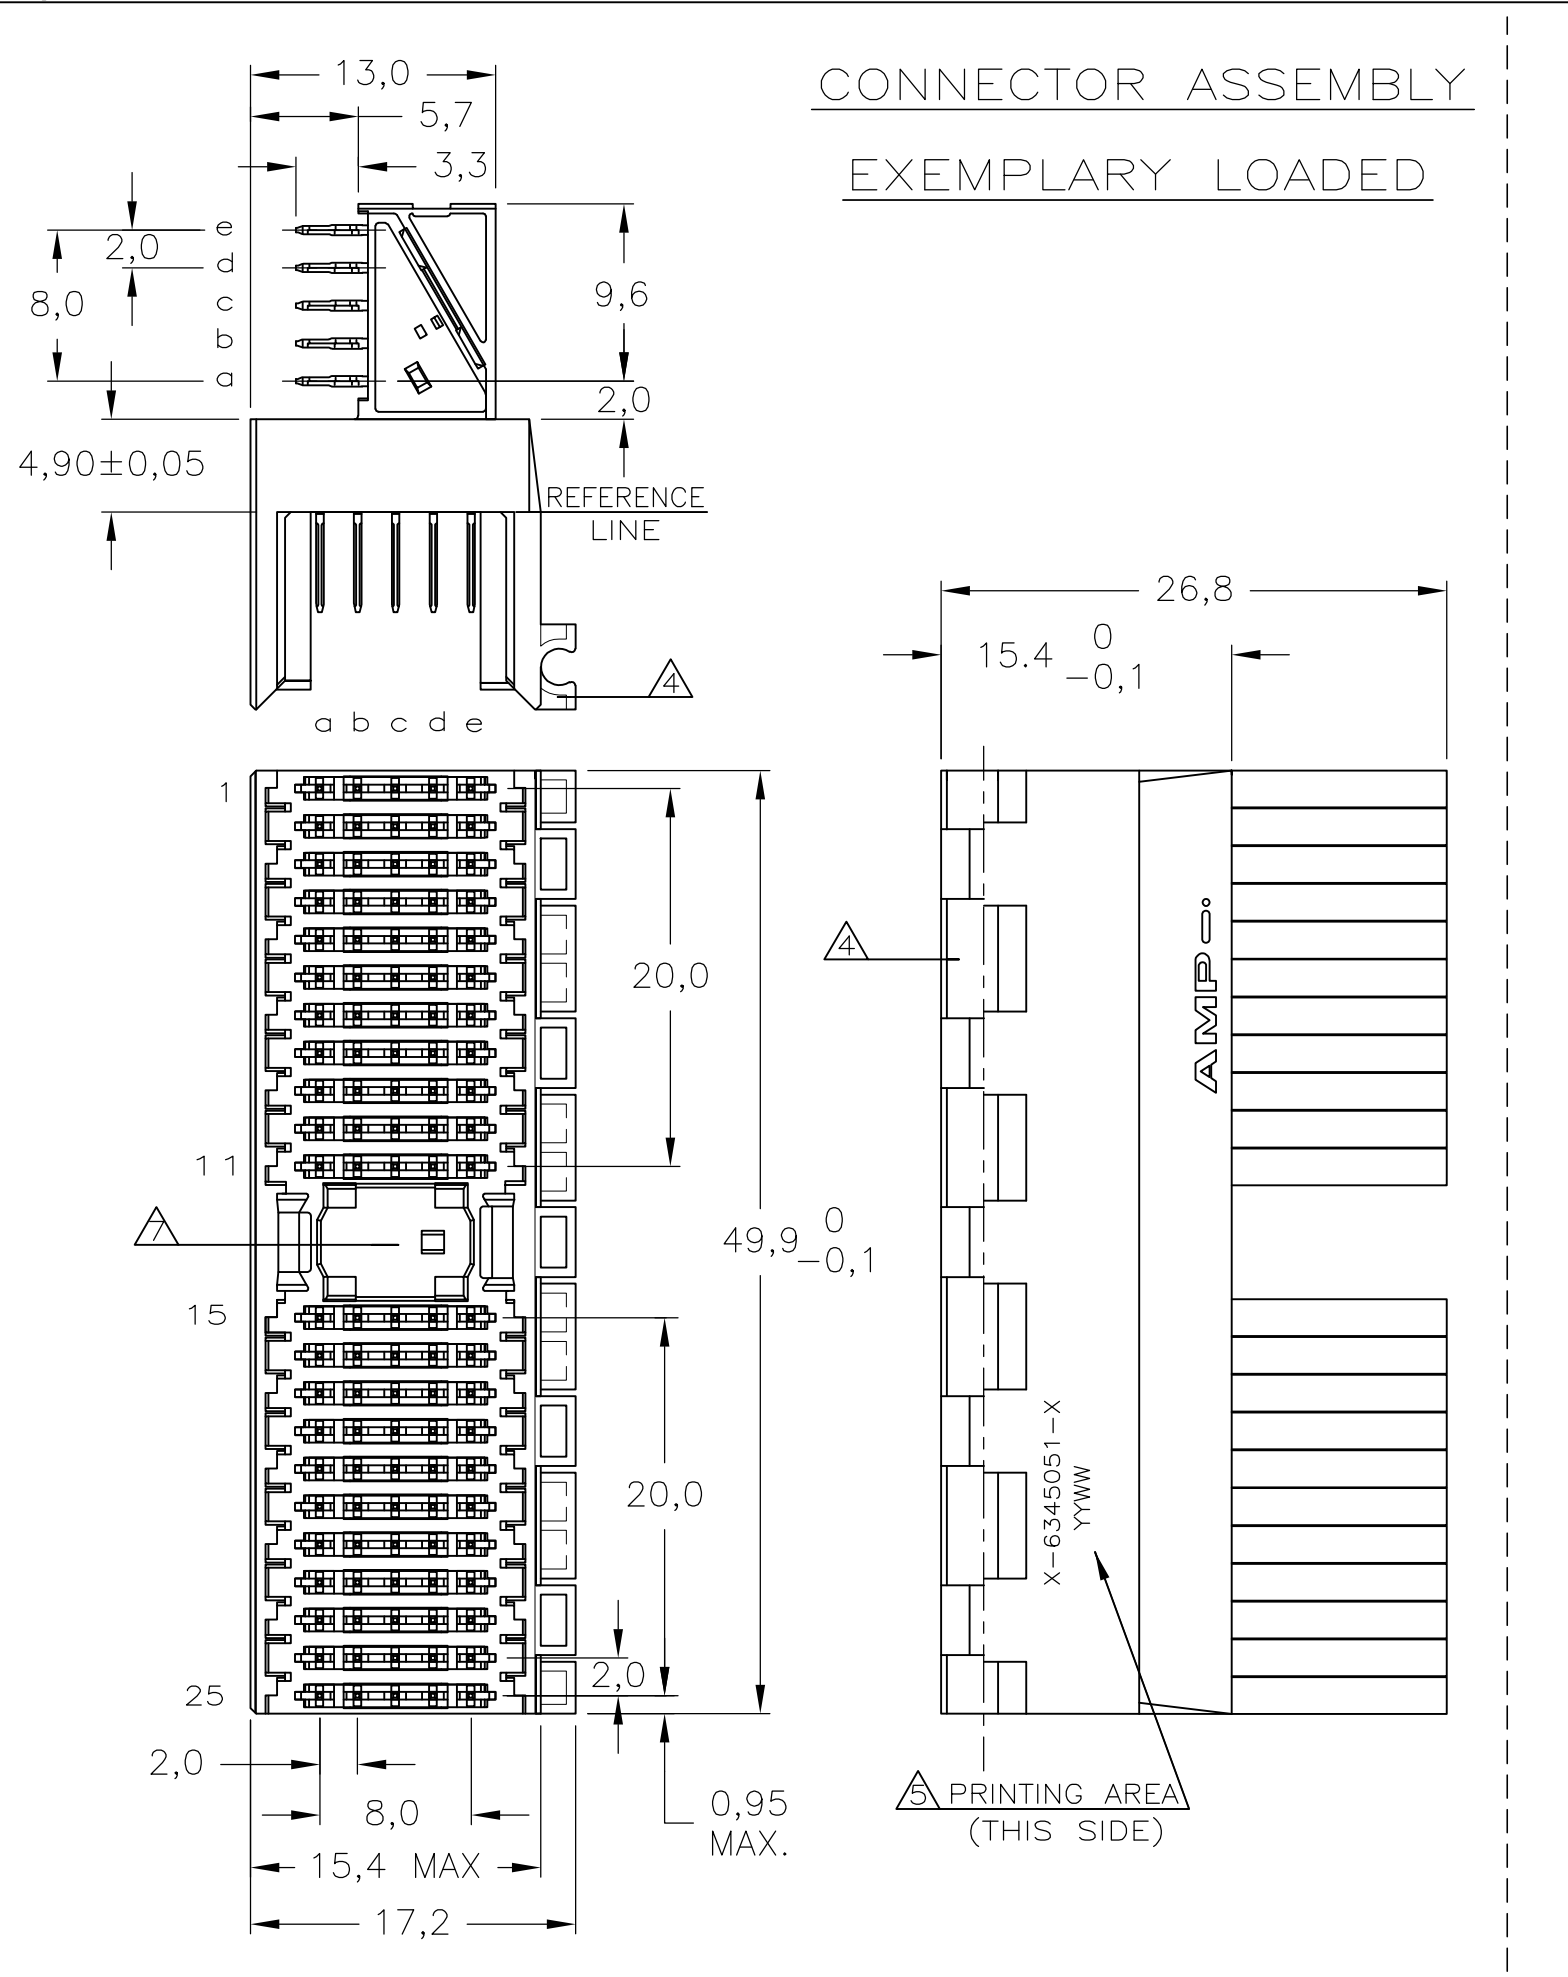

NOTES:

△

MATERIAL HOUSING

: GREY GLASSFILLED POLYESTER
UL-RATING V0

△

CONTACT

: PHOSPHORBRONZE

△

GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT):
1,27µm NICKEL MIN. AND ACTION PIN: 0,5µm TIN MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION
REFERENCE FOR EACH DASH NUMBER.

△

CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 2.

△

CONNECTOR ASSEMBLY WITH LATCH HINGE FOR CABLE CONNECTOR.

△

CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE


△

PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.


△

AREA FOR KEYING PART (BASIC PART NUMBER 100525).

CONTACT DIMENSIONS

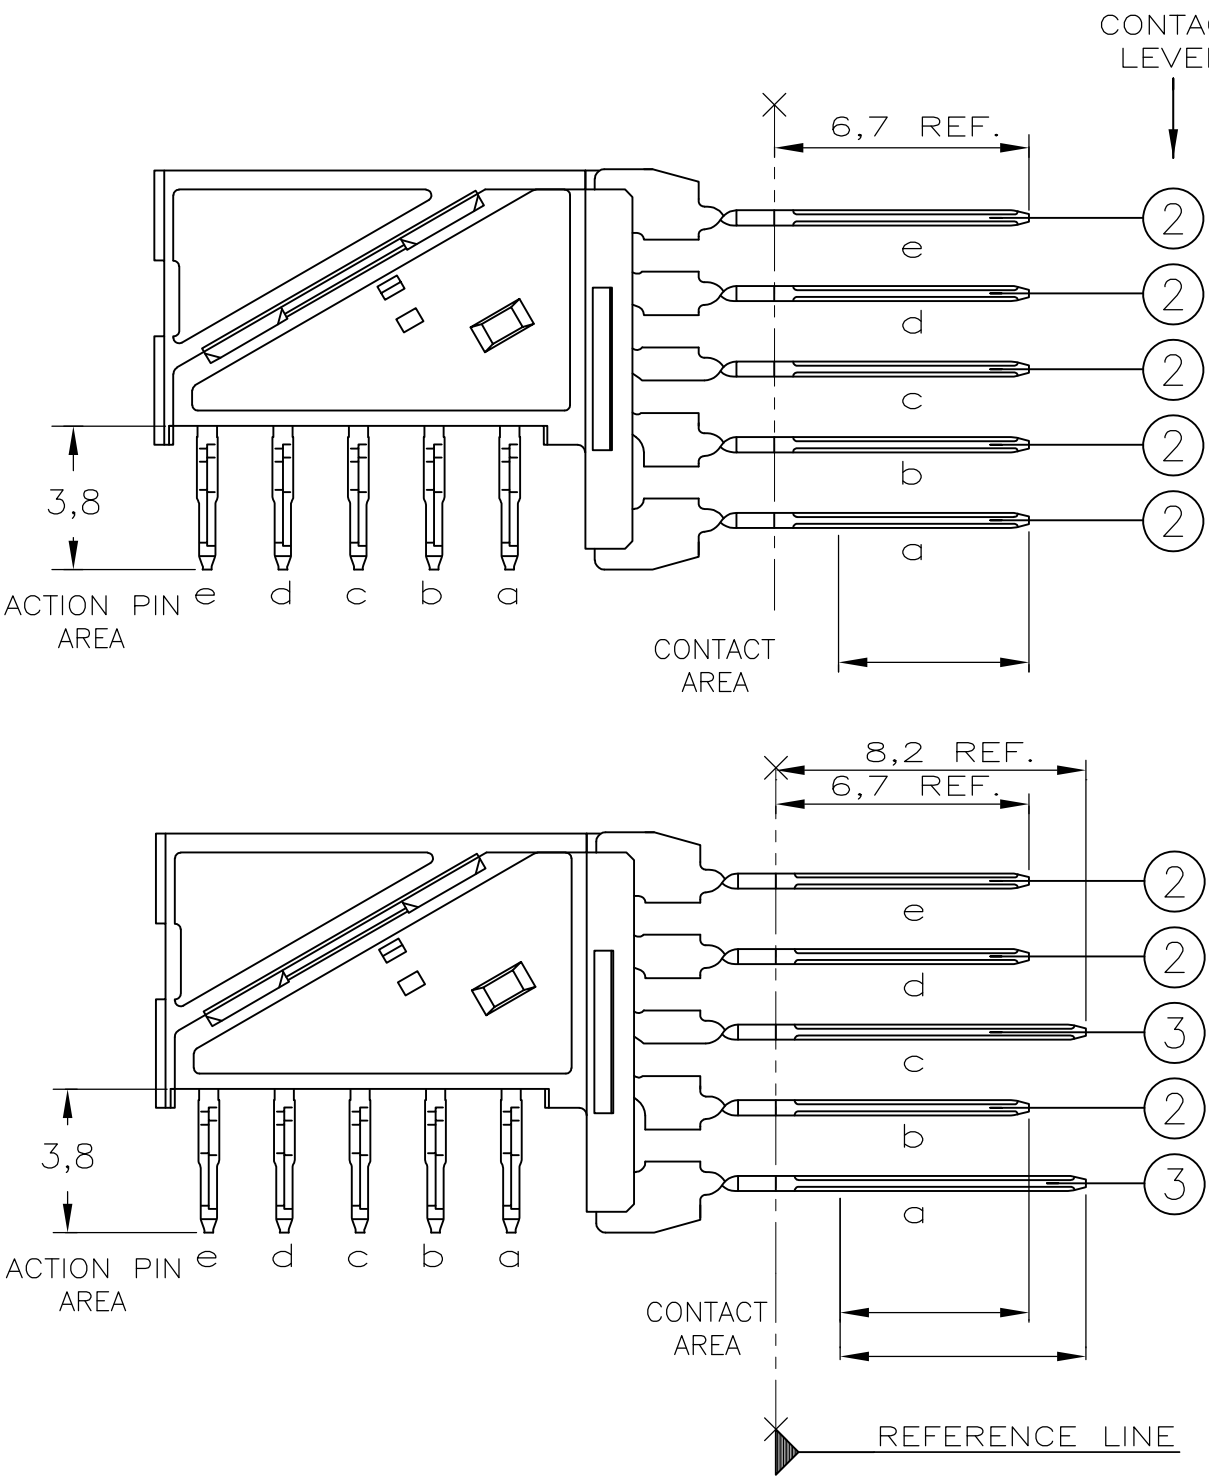

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
B		EH10-0680-05	07JUN05	BSV	BM
C		ECR-110-018652	10SEP10	JS	MQW

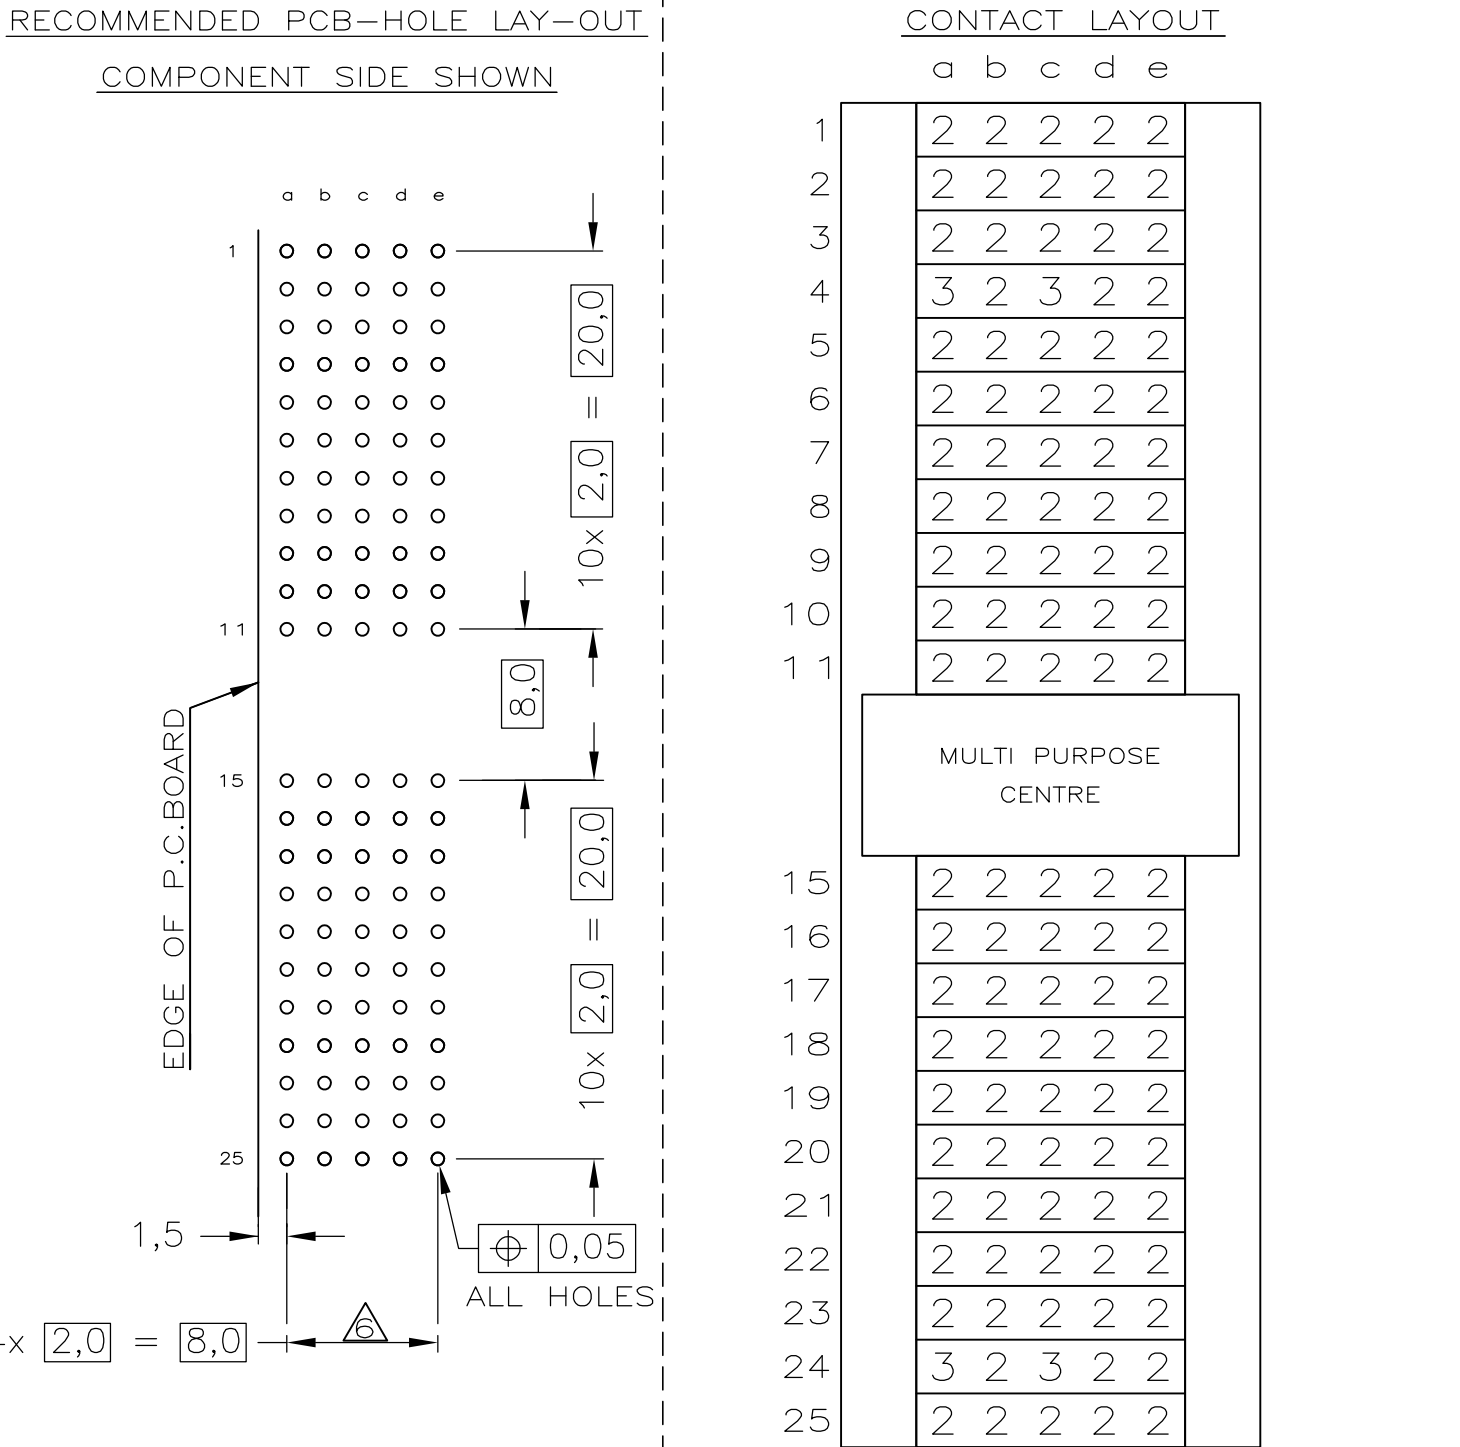

P.C.B. HOLE DIM. ACTION PIN
FOR DETAILS SEE
APPLICATION SPECIFICATION

CONTACT FINISH		MATERIAL	PART NUMBER
△△		△	1-6345051-1 △
△△			6345051-1
Tyco Electronics		Tyco Electronics Corporation 's-Hertogenbosch, 5222AR-32	
NAME		Z-PACK 2mm HM TYPE A 110 POS. RIGHT ANGLE MALE CONNECTOR ASSEMBLY	
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C=6345051	-
CUSTOMER DRAWING		SCALE	SHEET
		5:1	1 OF 1
		REV	C