


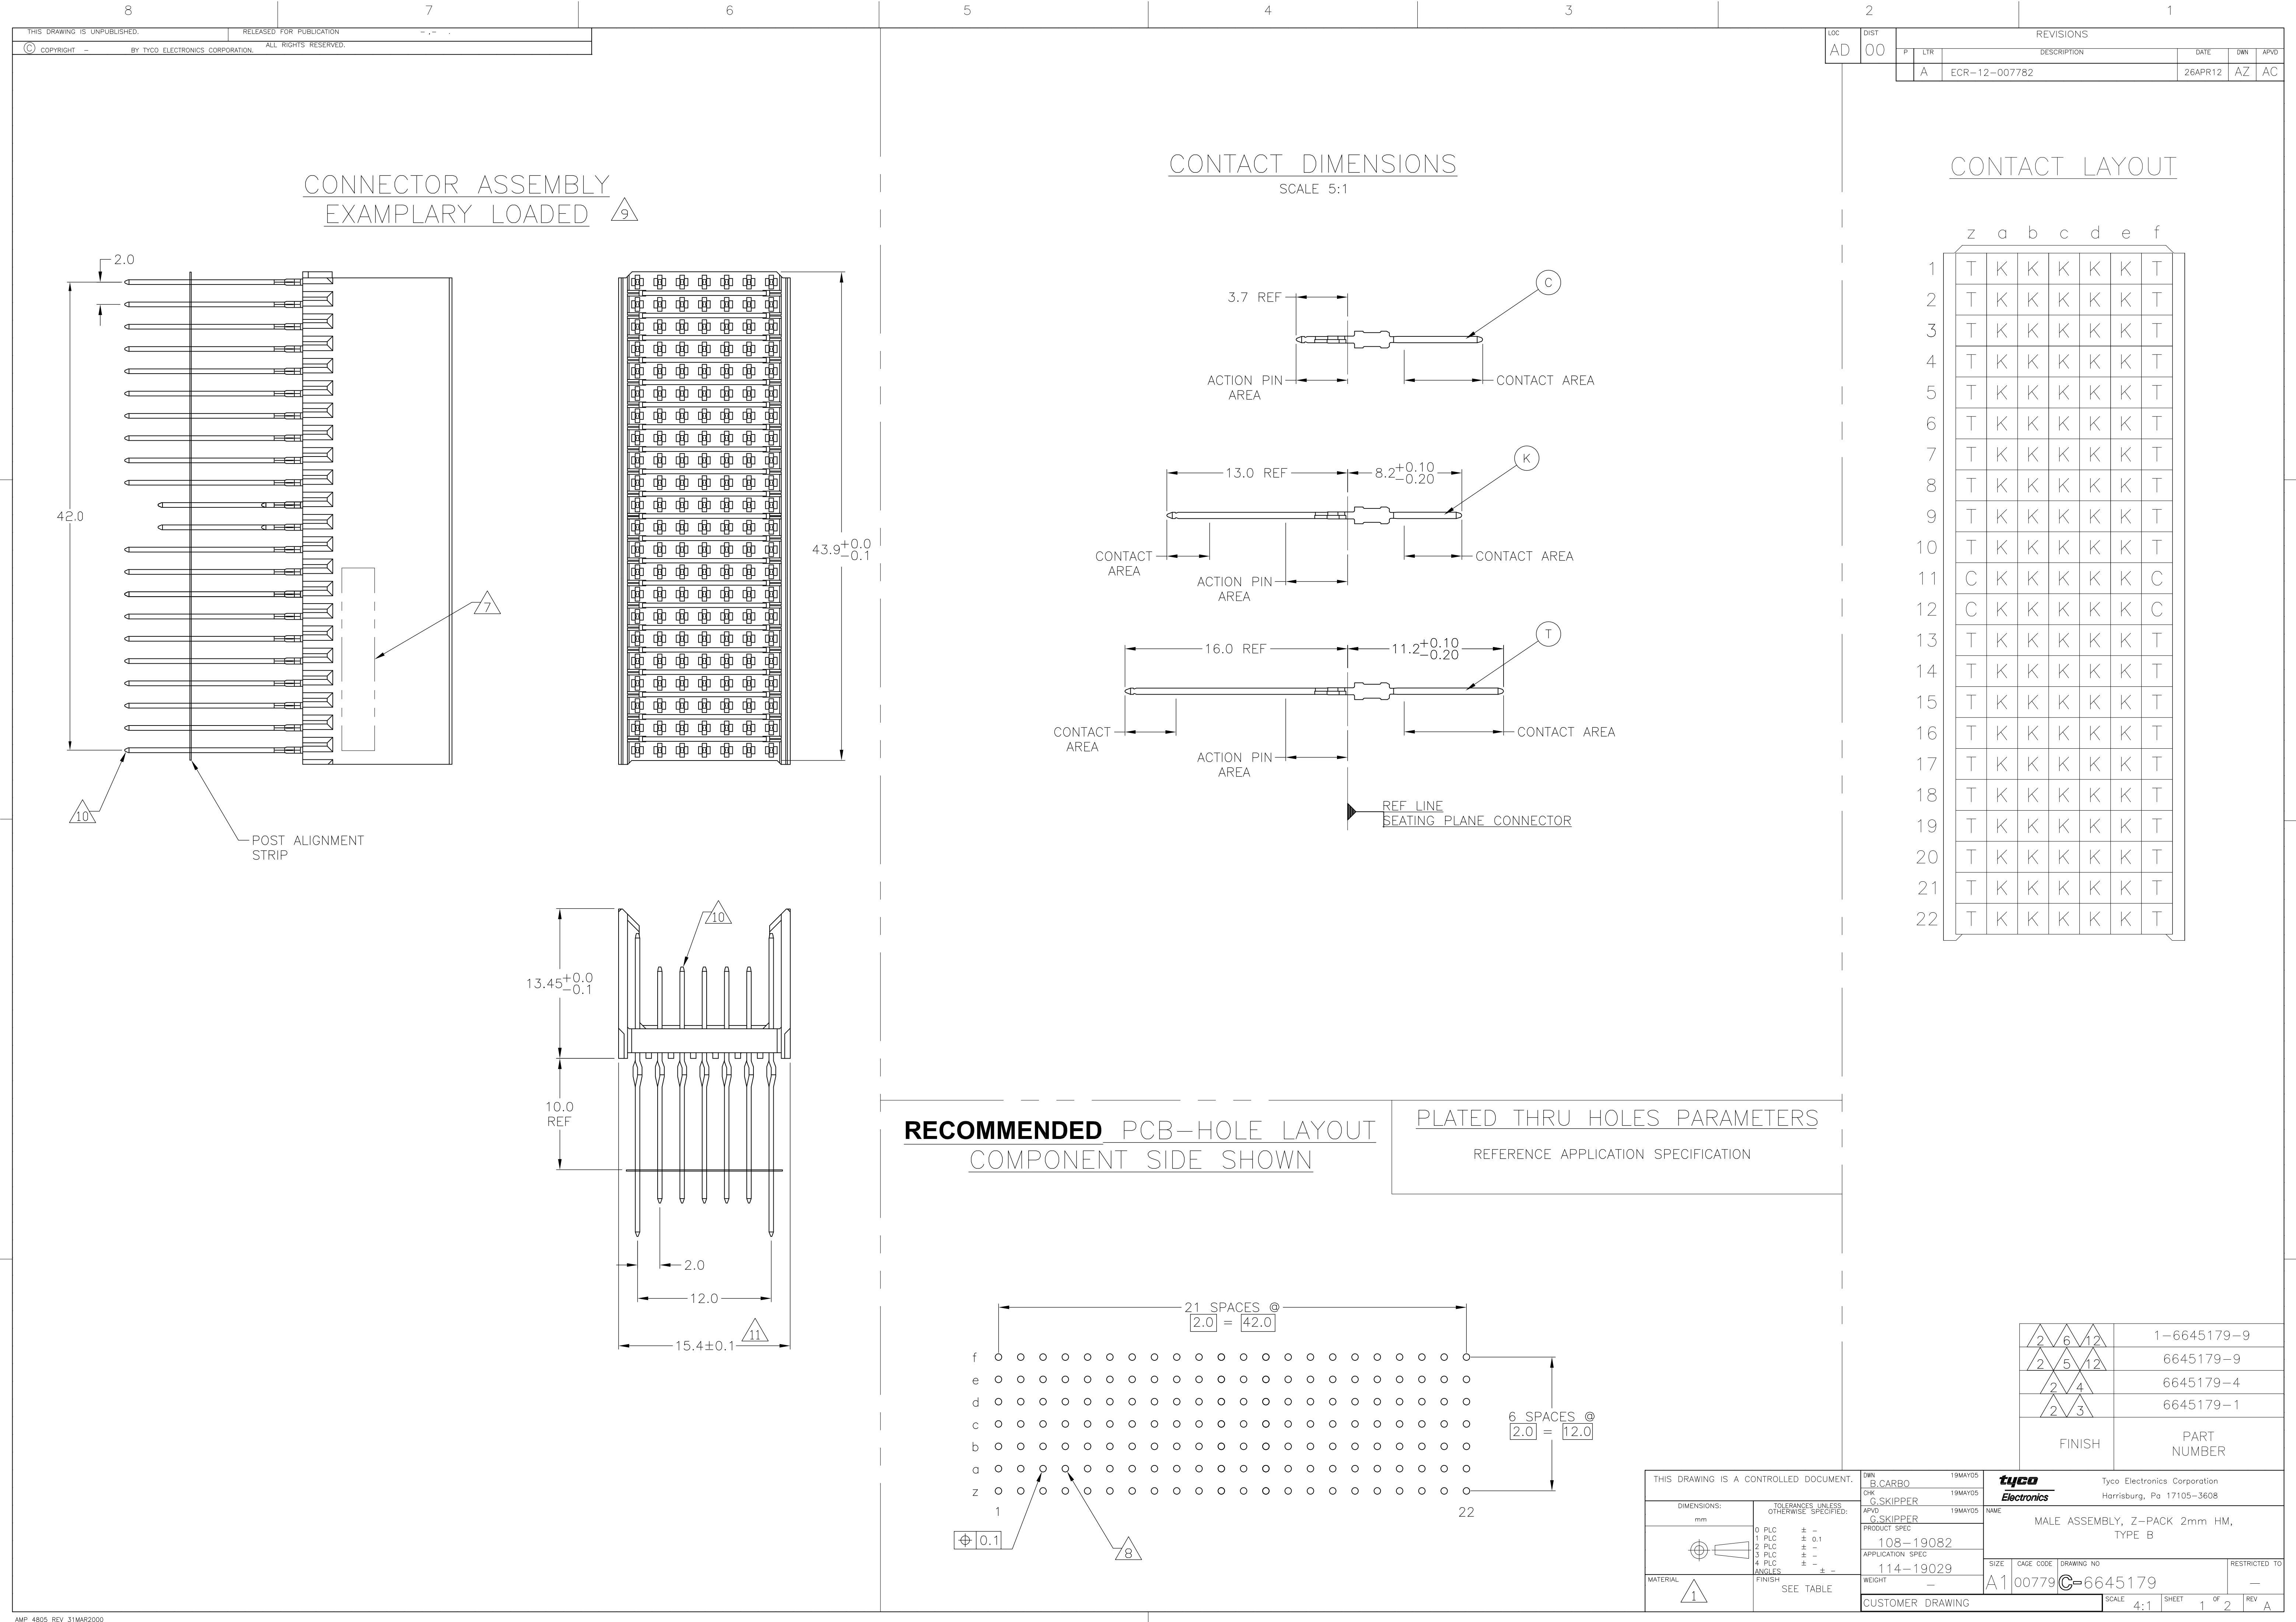

LOC	DIST	REVISIONS				
AD	00	P	LTR	DESCRIPTION	DATE	DWN
		—	—	SEE SHEET 1	—	—

- 1
- MATERIAL:
CONTACT: PHOSPHOR BRONZE.
HOUSING: GLASS-FILLED POLYESTER.
- 2
- GENERAL PLATING SPECIFICATION: UNDERPLATING
(ENTIRE CONTACT): 1.27μm MIN NICKEL AND ACTION
PIN: 0.5μm MIN TIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- 3
- CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 2.
- 4
- CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 1.
- 5
- CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
CENTRAL OFFICE APPLICATIONS.
- 6
- CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
UNCONTROLLED ENVIROMENT APPLICATIONS.
- 7
- CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
ADDITIONAL CHARACTERS OR MARKINGS, AS WELL AS THE LOCATION OF THE MARKINGS,
MAY BE ADDED FOR TRACEABILITY BASED UPON MANUFACTURERS DISCRETION.
- 8
- PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
PATTERN DEFINED BY CONTACT LAYOUT.
- 9
- FOR ACTUAL PIN LOADING SEE "CONTACT LAYOUT".
- 10
- FOR ACTUAL PIN DIMENSIONS SEE "CONTACT DIMENSIONS".
- 11
- TO BE MEASURED AT BOTTOM OF SHROUD.
- 12
- CONNECTOR LUBRICATED WITH BELCORE APPROVED LUBRICANT,
TECHNICAL REFERENCE: TR-NWT-001217 ISSUE 1, SEP 1992.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRN B CARBO	19MAY05	tyco Electronics		Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
		CHK G.SKIPPER	19MAY05				
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APRD G.SKIPPER	19MAY05	NAME MALE ASSEMBLY, Z-PACK 2mm HM, TYPE B	
		0 PLC	± —	PRODUCT SPEC			
		1 PLC	± 0.1	108-19082			
		2 PLC	± —	APPLICATION SPEC			
		3 PLC	± —	114-19029			
		4 PLC	± —				
		ANGLES	± —				
MATERIAL SEE SHEET 1	FINISH SEE SHEET 1	WEIGHT	—	SIZE A1	CAGE CODE 00779	DRAWING NO 6645179	RESTRICTED TO —
CUSTOMER DRAWING				SCALE 4:1	SHEET 2	OF 2	REV A