

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.




LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AG	53		0	RELEASED	25JAN06	JDP	JGH

D

C

B

A

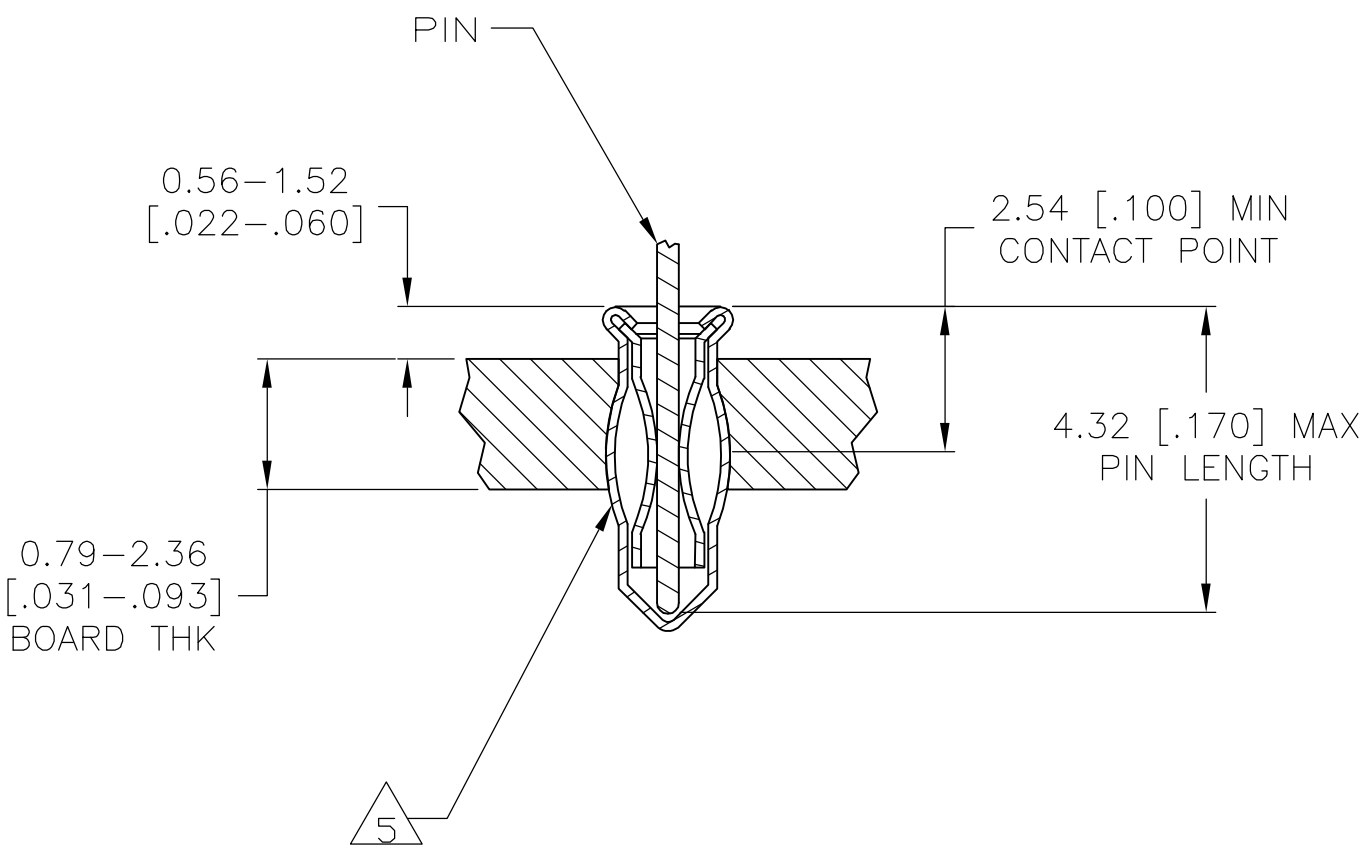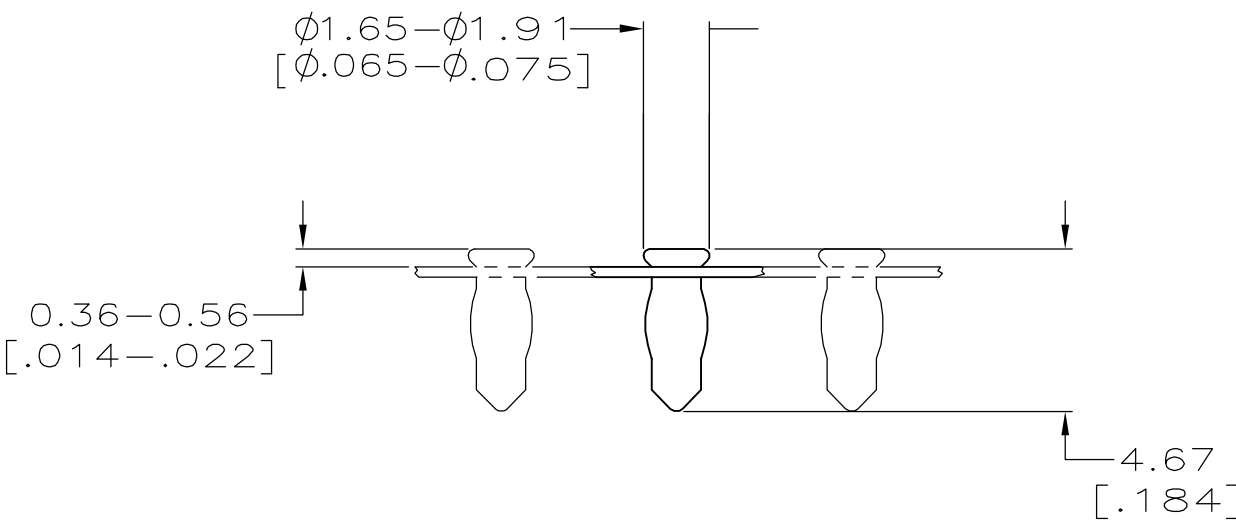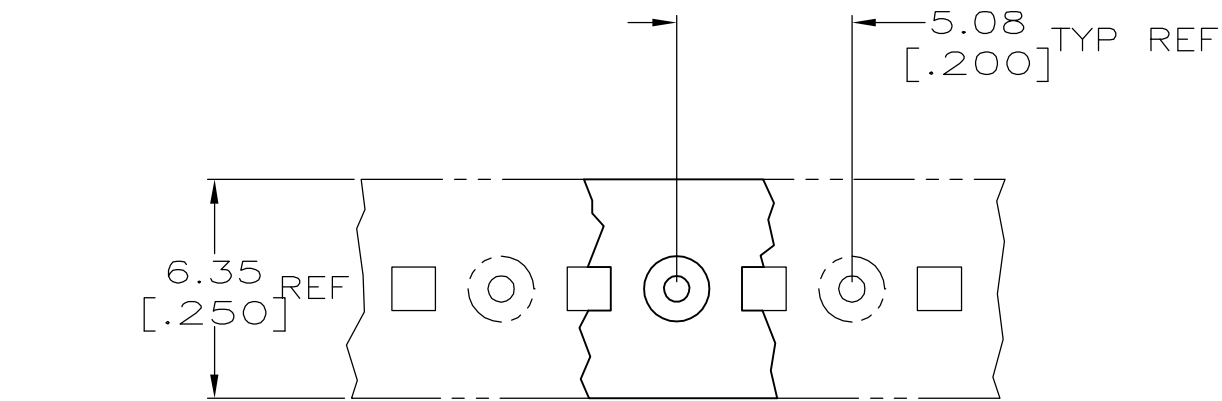

- 1 MATERIAL:
EYELET - COPPER PER ASTM B 152
SPRING - BERYLLIUM COPPER PER ASTM B 194
- 2 TIN PLATE PER ASTM B 545, 0.00254 [.000100] MIN THK.
- 3 PACKAGED, 50,000 PER REEL
- 4 TO INSURE 1/2 OZ MIN RETENTION DO NOT EXCEED 0.10 [.004] DIFFERENCE IN PIN DIA WHEN CHANGING TO A SMALLER DIA PIN
- 5 PRODUCT IS OVALIZED FOR RETENTION IN THE P.C. BOARD. THE RECOMMENDED HOLE DIAMETER IS 1.32 [.052] MINIMUM, +0.08 [.003] MAX. PRIOR TO SOLDERING.
- 6 PACKAGED 10,000 PER REEL

2.54-4.32 [.100-.170]	0.36-0.66 [0.014-0.026]	TIN	2	TIN	2	6	1-5645956-1
2.54-4.32 [.100-.170]	0.36-0.66 [0.014-0.026]	TIN	2	TIN	2	3	5645956-1
LENGTH	DIA	4	SPRING	EYELET	PART NO.		
PIN			FINISH				

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN J. POLIGNONE 25JAN06		tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608								
			CHK J. HAVENER 25JAN06										
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. HAVENER 25JAN06		NAME							
		0 PLC ± -		PRODUCT SPEC		MINIATURE SPRING SOCKET ASSY SERIES 2 LONG WITHOUT SEALANT							
		1 PLC ± -		108-14008									
		2 PLC ± -		APPLICATION SPEC									
		3 PLC ± 0.20[.008]		114-26004		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
MATERIAL		4 PLC ± -		WEIGHT		A2		00779		C=5645956		-	
		ANGLES ± ±		-									
		FINISH		SEE TABLE									
				CUSTOMER DRAWING									
						SCALE		1:1		SHEET		1 of 1	
										REV		O	