


MATERIAL NUMBER	ENGINEERING NUMBER	CUSTOMER NUMBER	CARRIER	PLATING SEE NOTE 6 & 7.	DIMENSION "A"	DIMENSION "B"	HOLE
197114001	19711-4001	-	LOOSE	TIN/LEAD	.300	.250	YES
197114003	19711-4003	-	STRIP	TIN/LEAD	.300	.250	YES
197114005	19711-4005	-	LOOSE	TIN/LEAD	.300	.250	OMIT
197114007	19711-4007	-	STRIP	TIN/LEAD	.300	.250	OMIT

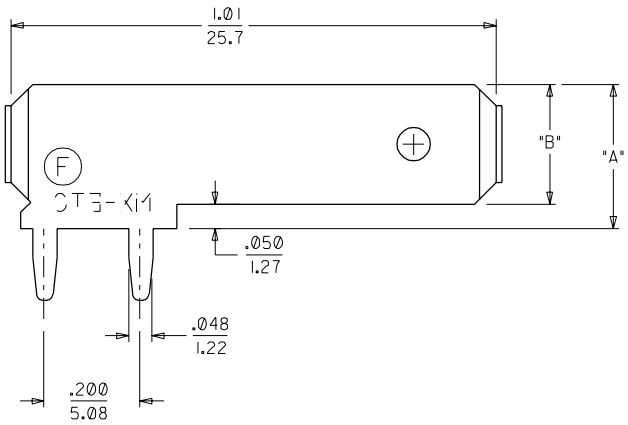


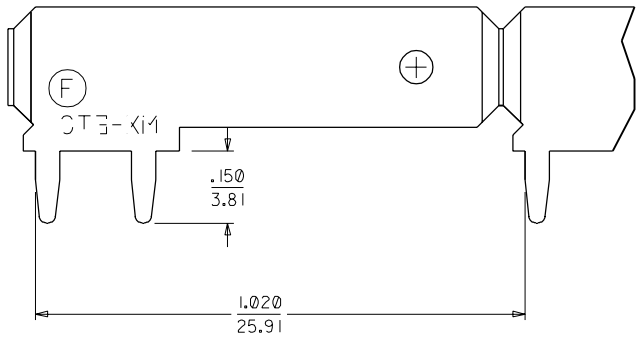


PROGRESSION

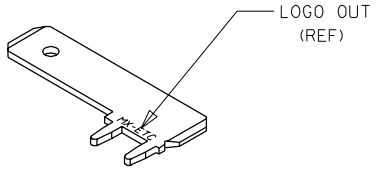

ISOMETRIC VIEW

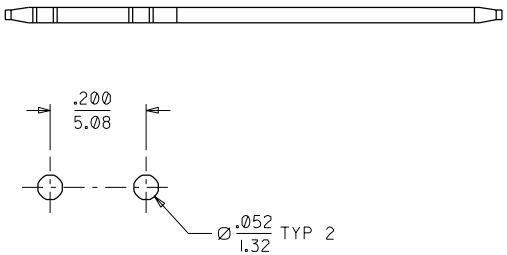

RECOMMENDED P.W.B.
HOLE LAYOUT

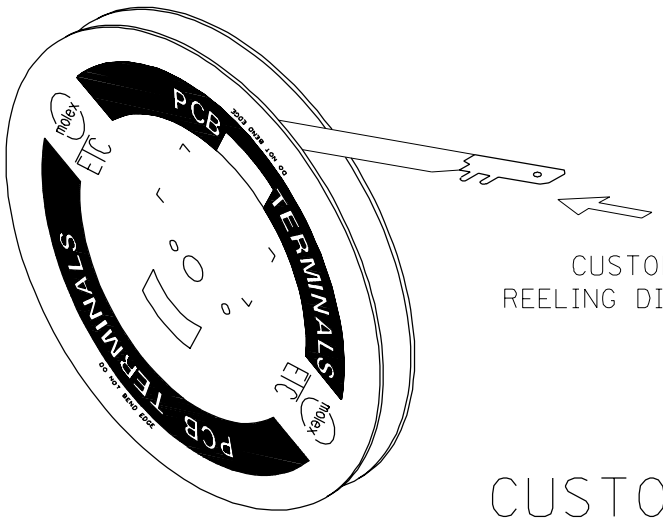

CUSTOMER
REELING DIRECTION

NOTES:
1. BARE EDGES PERMISSIBLE AT CARRIER CUT OFF.
2. MATERIAL: BRASS.
3. MATERIAL THICKNESS: .032 ±.001/(0.813 ±0.03)
4. TAB CONFORMS TO NEMA SPECIFICATIONS.
5. ALL DIMENSIONS AND NOTES ARE REFERENCE ONLY UNLESS NOTED.
6. PLATING: THICKNESS:90/10 TIN/LEAD: 150 µ in(3.81µm) MIN THICKNESS.
7. FINISH: MATTE

CUSTOMER DRAWING

PLOT

REV	DESCRIPTION	
F	MOVED LOGO FARSD	01/12/12
	EC NO. ETC2002-0182	01/12/12
	DRWN: BRE	01/12/12
	CHK: HEB	
	APPR: RWD	

QUALITY SYMBOLS
MAJOR ▼=0
CRITICAL (C)=0

GENERAL TOLERANCES: (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±0.	±.
3 PLACES	±0.	±.005
2 PLACES	±0.13	±.01
1 PLACE	±0.25	±.
ANGULAR: ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

SCALE 5:1 | DESIGN UNITS ☐mm ☒INCH | THIRD ANGLE PROJECTION

DIMENSIONS: ☐mm/INCH ☒INCH/mm ☐mm ONLY | SHT | REV | REVISE ON CAD ONLY

DRAWN BY & DATE: JH 98/04/28
CHECKED BY & DATE: RWD 98/04/28
APPROVED BY & DATE: RWD 98/04/28
CAD FILENAME: SD-19711-400 .DGN

TITLE: QUICK DISCONNECT PCB MOUNTABLE .250 X .032 TAB

molex MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DRAWING NO.: SD-19711-400
SHEET NO.: 1 OF 1
SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.