

"High Frequency Ceramic Solutions"

2450 MHz Band Pass Filter

P/N 2450BP15C100

Detail Specification: 06/21/06

Page 1 of 2


General Specifications

Part Number	2450BP15C100
Frequency (MHz)	2400 - 2500
Attenuation (min.)	25 dB @ 695 ~ 800MHz
Attenuation (min.)	25 dB @ 1910MHz
Attenuation (min.)	35 dB @ 3200MHz
Attenuation (min.)	20 dB @ 4800 ~ 5000MHz
Attenuation (min.)	20 dB @ 7200 ~ 7500MHz

Insertion Loss	2.8 dB max.
Return Loss	9.5 dB min.
Impedance	50 Ω
Input Power	500 mW max.
Operating Temperature	-40 to +85°C
Storage Temperature	-40 to +85°C
Reel Quantity	4,000


P/N	Packaging Style	Bulk	Suffix = S	Eg. 2450BP15C100S
		T & R	Suffix = E	Eg. 2450BP15C100E
Suffix	Termination	100% Tin	Suffix = None	Eg. 2450BP15C100(E or S)
	Style	Tin / Lead	Suffix = /Pb	Eg. 2450BP15C100(E or S)/Pb

Terminal Configuration	
No.	Function
1	GND
2	OUT
3	GND
4	IN



Mechanical Dimensions


	In	mm
L	0.079 ± 0.006	2.00 ± 0.15
W	0.049 ± 0.004	1.25 ± 0.10
T	0.022 ± 0.004	0.55 ± 0.10
a	0.051 ± 0.006	1.30 ± 0.15
b	0.012 ± 0.006	0.30 ± 0.15
c	0.010 ± 0.006	0.25 ± 0.15
d	0.014 ± 0.006	0.35 ± 0.15

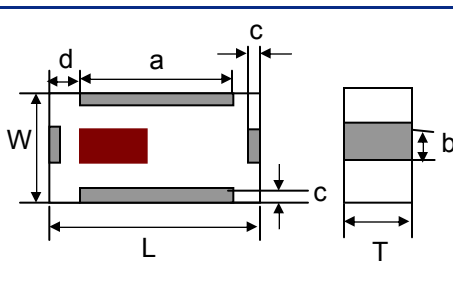

Mounting Considerations

Mount these devices with brown mark facing up.

* Line width should be designed to provide 50 ohm impedance, depending on PCB material and thickness

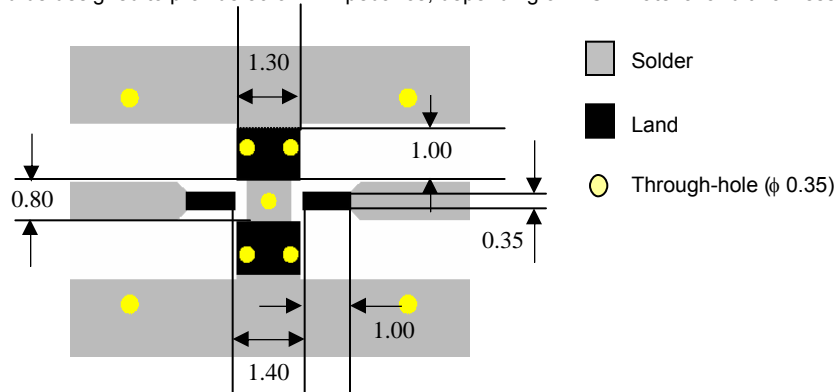

Units: mm

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechology.com

931 Via Alondra • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2003 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"


2450 MHz Band Pass Filter

P/N 2450BP15C100

Detail Specification: 06/21/06

Page 2 of 2

Typical Electrical Performance (T=25°C)

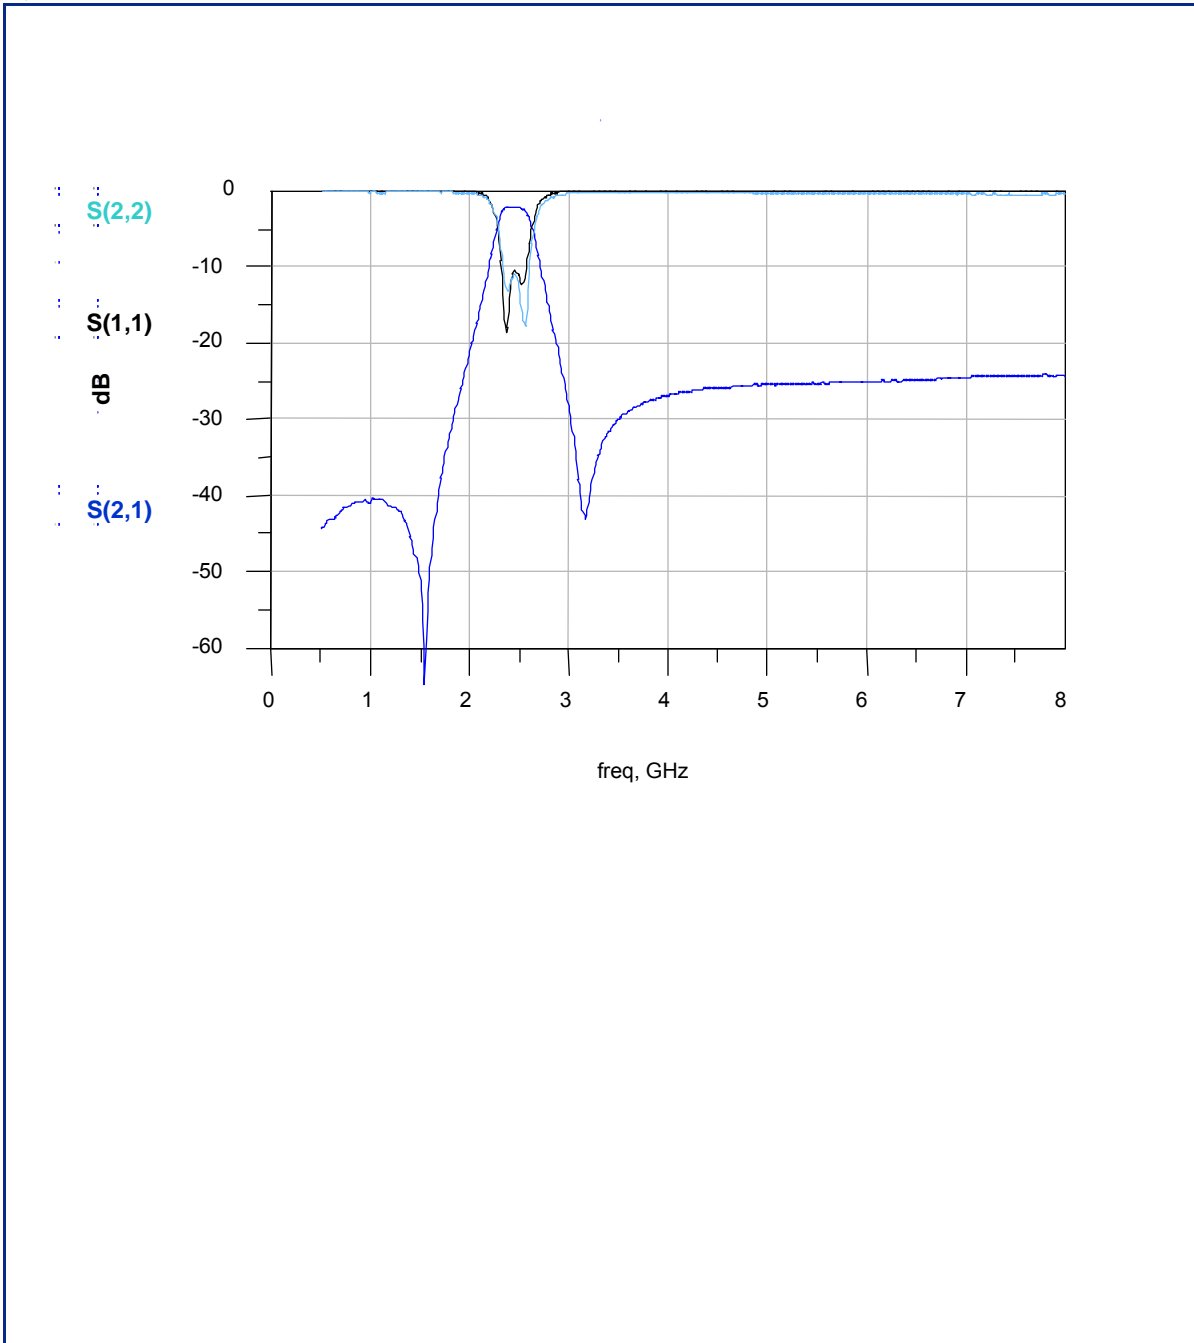

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com
931 Via Alondra • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2003 Johanson Technology, Inc. All Rights Reserved