
© – TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	INITIAL RELEASE	08NOV2021	GSK	JDA

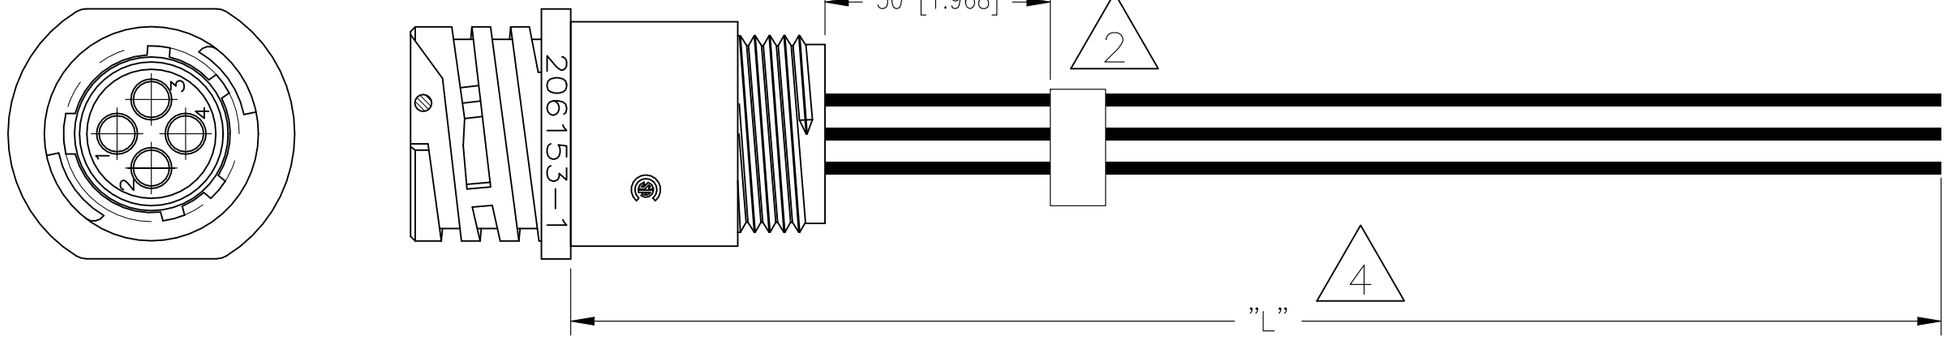

NOTES:

1. OVERALL INSULATION CRIMP DIAMETER, INCLUDING CRIMP BARREL, MUST NOT EXCEED .125 [3.18]

2 LABEL LOCATED APPROXIMATELY WHERE SHOWN. LABEL INFORMATION AS FOLLOWS:

2386899–X	TE P/N
REV B	CUST REV
TE/MEXICO	MANUFACTURER NAME/COUNTRY OF ORIGIN
MM/DD/YY	DATE CODE

3. WIRE IDENTIFICACIONS REQUIREMENTS:
   3.1 WIRES SHALL BE MARKED PERMANENTLY WITH THE CAVITY NUMBER "X"
   3.2 MARKINGS SHALL APPEAR SPACED EVERY 12 INCHES (APROXIMATED 305 mm).

4 "L" REPRESENTS THE LENGTH OF THE WIRE USED FOR THE LEADS.

TE PN	LENGTH "L"
2386899–1	0.5M
2386899–2	1.0M
2386899–3	2.0M

5. TOLERANCES PER IPC STANDARD:
   IPC–A–620A

Metric	
<0.3 m	+25mm –0mm
>0.3 m – 1.5m	+50mm –0mm
>1.5 m – 3m	+100mm –0mm
>3 m – 7.5m	+150mm –0mm
>7.5m	+5% –0%

6. HARNESS SHALL BE SHIPPED IN SEALED PLASTIC BAG.
7. CONTINUITY ELECTRICAL TEST MUST BE PERFORMED.
8. WIRE 18 AWG

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –

FINISH –

DWN SATHISH KUMAR G 08NOV2021
CHK JUAN AVILA 08NOV2021
APVD JUAN AVILA 08NOV2021
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT

TE Connectivity

NAME CPC FREE HANGING RCPT CONNECTOR CABLE, STD SEX, SERIES 1, 11–4

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2386899	—

CUSTOMER DRAWING | SCALE NTS | SHEET 1 OF 1 | REV B