

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT – TE Connectivity Ltd. ALL RIGHTS RESERVED.

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	D2	REDRAWN PER ECR-17-018705	06DEC2017	BDA	GG

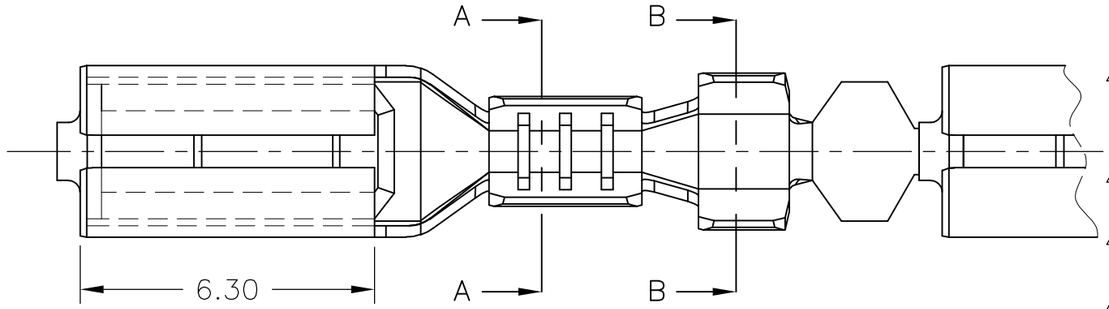



1. FOR USE ON MINIATURE APPLICATORS (LEFT–RIGHT FEED) AND STANDARD APPLICATORS (RIGHT–LEFT FEED)
2. BRASS ACC. ASTM B36 ALLOY 260.
3. PH. BRONZE ACC. ASTM B103.
4. GAGE 0.74 MUST NOT ENTER, GAGE 0.58 MUST ENTER.
5. REELED WITH PAPER COVER.
6. UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ±0.4mm

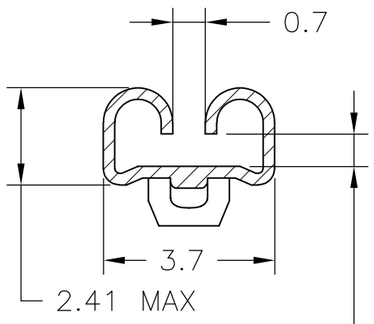


4 FOR 0.8 mm TAB THICKNESS

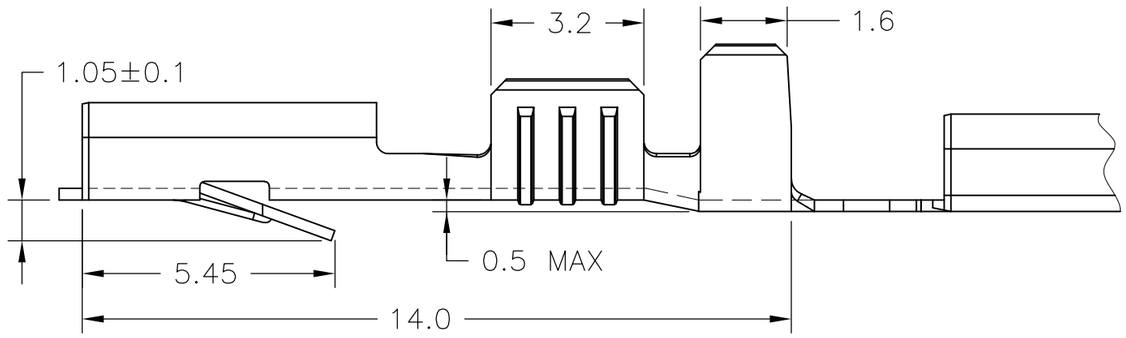


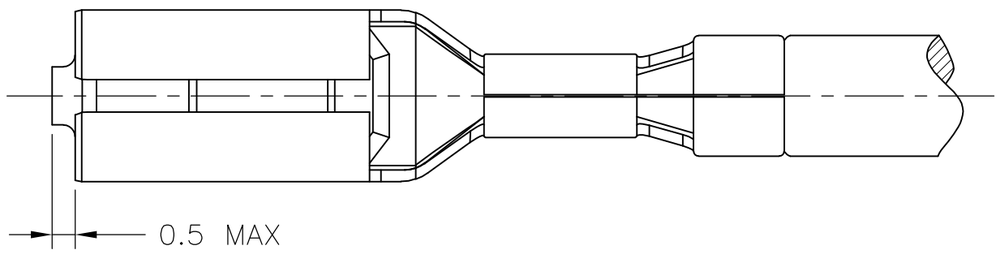

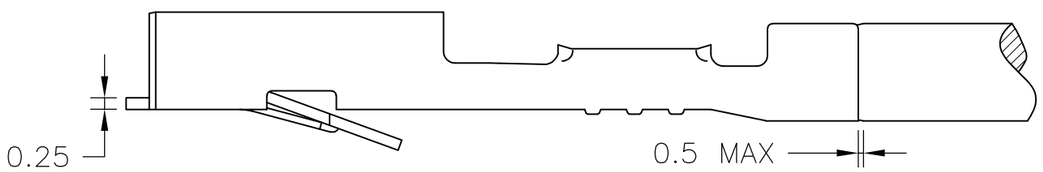



SECTION A–A




SECTION B–B

NOTES	FINISH	MATERIAL	PART NUMBER
3 1	PH. BRONZE	PH. BRONZE 6XSn	160864-6
3 1	PH. BRONZE	PH. BRONZE 6XSn	160864-5
3 1	PRE –TINPLATED	PH. BRONZE 4XSn	160864-4
3 1	UNPLATED	PH. BRONZE 4XSn	160864-3
2 1	PRE –TINPLATED	BRASS	160864-2
2 1	UNPLATED	BRASS	160864-1

WIRE RANGE: 0.5–1.0mm²

INSULATION RANGE: 1.4–2.3 DIA

DIRECTION OFF TOP OF REEL:



THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –

FINISH –

DWN BASAVARAJA D A 06DEC2017
CHK GUNASEKHAR G 06DEC2017
APVD GUNASEKHAR G 06DEC2017
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT

TE Connectivity

NAME .110 SERIES FASTIN–ON RECEPTACLE –

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-160864	–

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV D2