
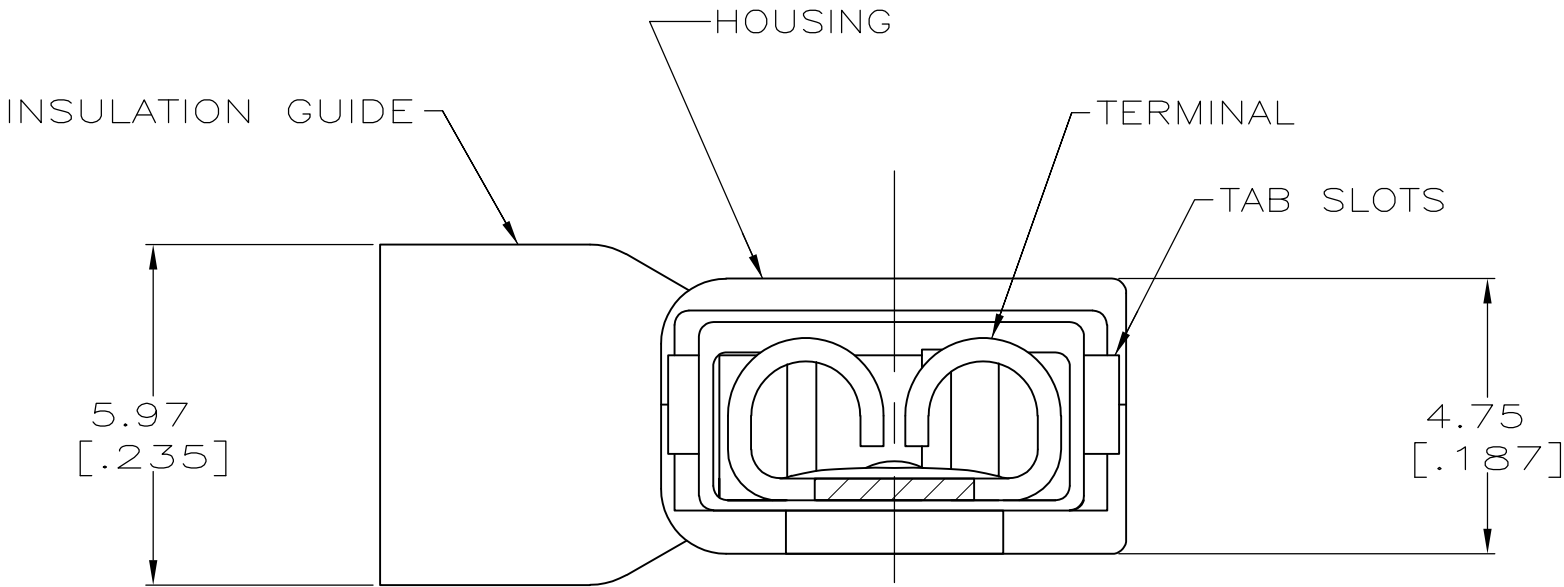
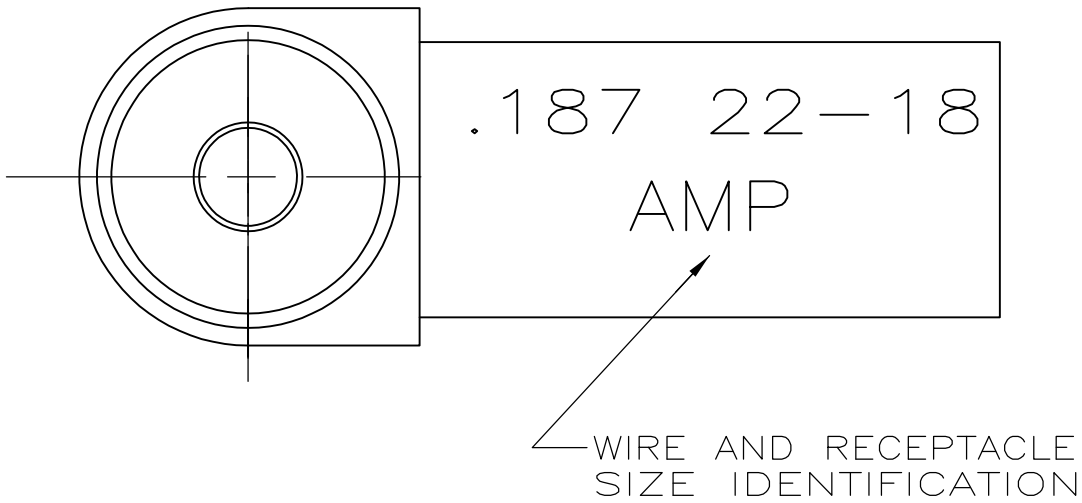


LOC	DIST	REVISIONS				
AF	50	P	LTR	DESCRIPTION	DATE	OWN
			J	REVISED PER ECR-13-004343	30JUL13	KH
						APVD
						KR

- 1 FITS 0.81±0.025 X 4.75 [.032±.001 X .187] TAB
- 2 WIRE SIZE: 0.3–0.9mm² [22–18 AWG], STRANDED ONLY.
STRIP LENGTH 7.14 [.281]
- 3 INSULATION SIZE: 4.19 [.165] MAX DIA.
- 4 SUPPLIED AS LOOSE PIECE

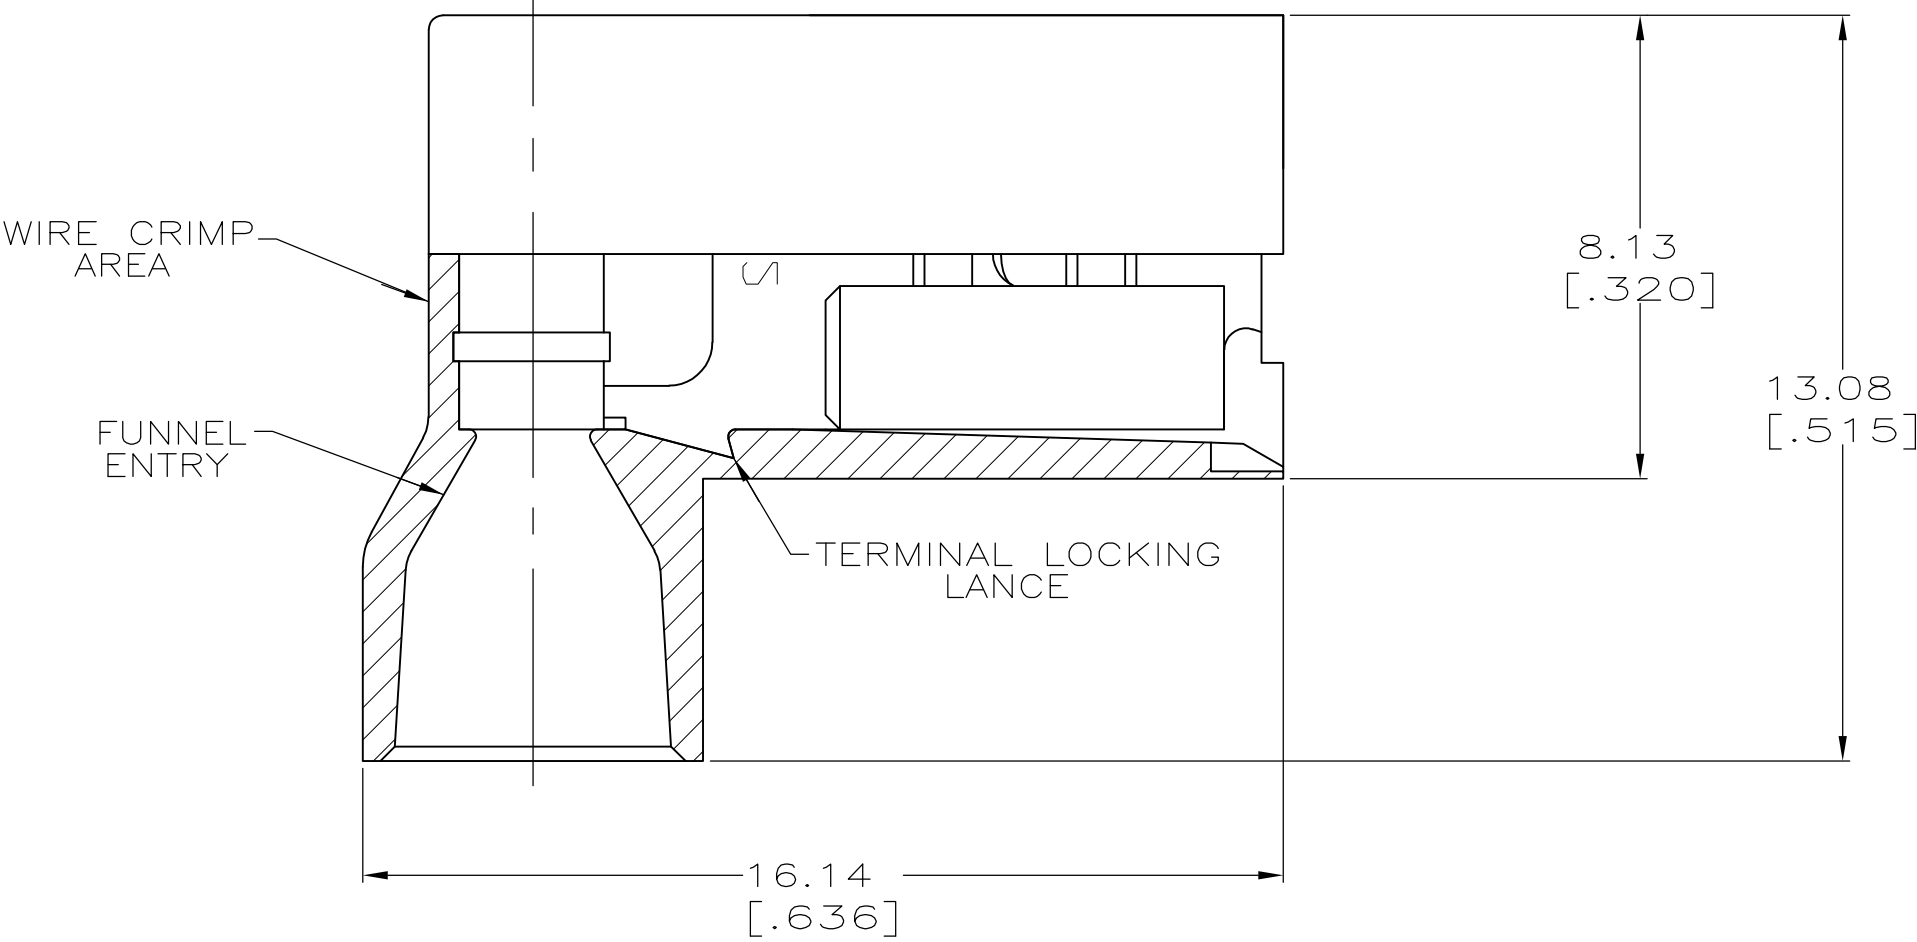

OBSOLETE	TYPE 6/6 NYLON	RED TRANSLUCENT	0.41 [.016] #4H PH BRZ	TIN	2–520337–4
	TYPE 6/6 NYLON	RED TRANSLUCENT	BRASS	TIN	2–520337–2
	MATERIAL	COLOR	MATERIAL	FINISH	PART NO
HOUSING			TERMINAL		
THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN P FORTNEY	8/10/90	TE Connectivity RECEPTACLE ASSEMBLY,ULTRA–FAST FLAG, 4.75 [.187] SERIES,LOOSE PIECE
			CHK MS FEHER	8/23/90	
			APVD D BRATINA	8/24/90	
			PRODUCT SPEC	108–2043	
			APPLICATION SPEC	114–2123	SIZE
			WEIGHT	–	CAGE CODE
			A200779C-520337		
			CUSTOMER DRAWING		
			SCALE 8:1		
			SHEET 1 of 1		
			REV J		