

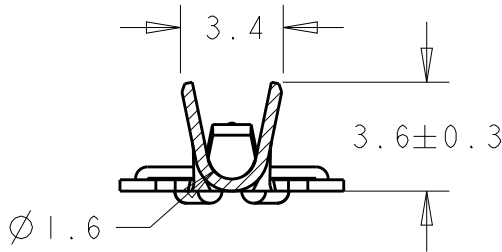
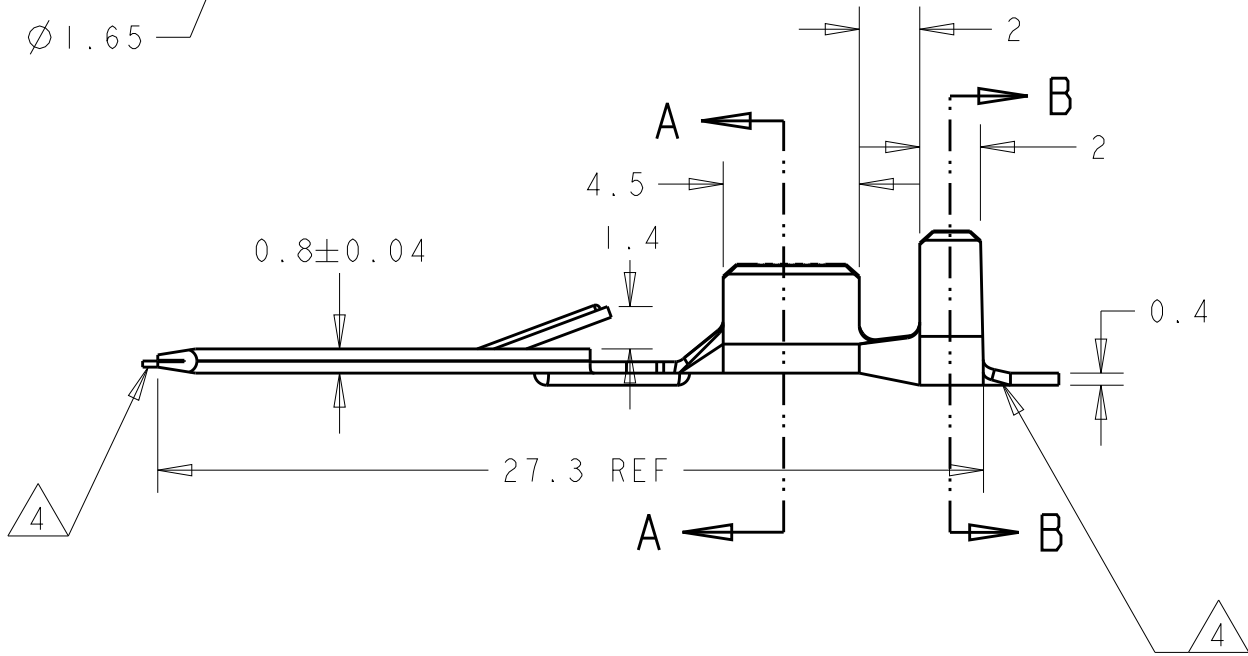


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A2	REVISED PER ECR-19-015041	04NOV2019	PC	MB

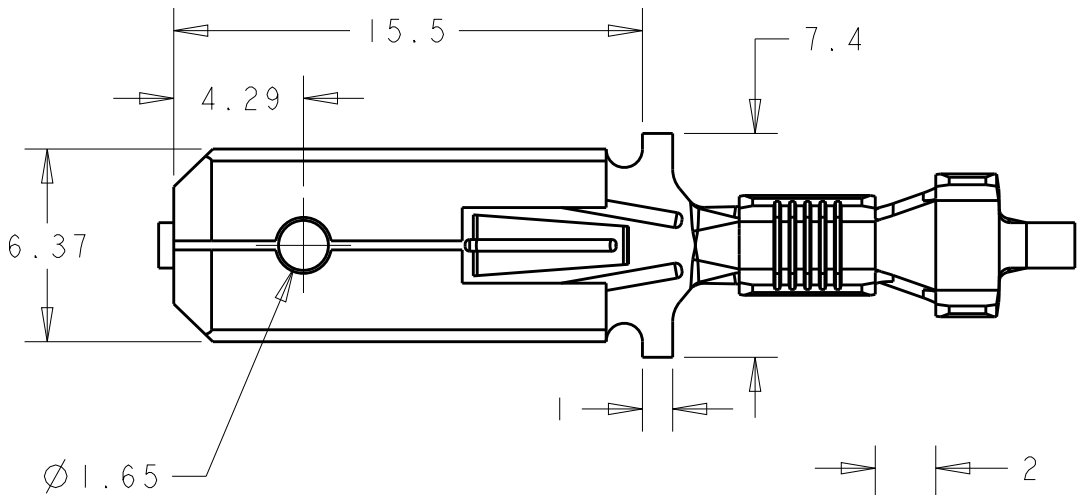

SECTION A - A

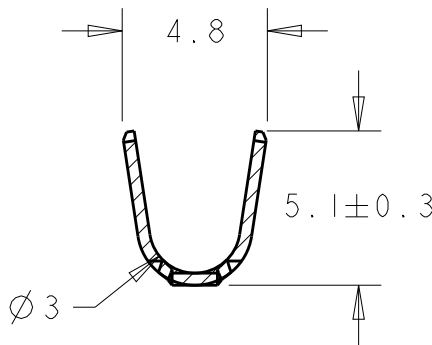


SECTION B - B

NOTES:..

- 1. WIRE BARREL CRIMP : Width 2.54mm (.100)
Height 1.46mm (.057) "F Crimp"
- 2. INSULATION BARREL CRIMP: 4.06mm (.160) "OVERLAP"
- 3. MATERIAL: BRASS 100-86: 0.4±0.01 x 12.0 T2
- 4 0.5 MAX CUT OFF TABS
- 5. WIRE RANGE: MAGNET WIRE 0.9 - 1.6mm Ø
- 6. INSULATION RANGE: 2.2 - 3.3mm Ø
- 7. NO VISIBLE OIL RESIDUE
- 8. REELED WITH INTERLEAVE PAPER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm



MATERIAL
SEE TABLE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	±0.5
1 PLC	±0.5
2 PLC	±0.5
3 PLC	±0.5
4 PLC	±
ANGLES	±1

FINISH
SEE TABLE

DWN 04-Nov-19

M.GREENER

CHK 28NOV2006

J.AMBROSE

APVD 28NOV2006

J.AMBROSE

PRODUCT SPEC

108-3271

APPLICATION SPEC

114-18022

WEIGHT

-

CUSTOMER DRAWING

NONE

FINISH

NOTE 3

MATERIAL

1814988-1

PART NO



TE Connectivity

NAME
.250 SERIES FASTIN FASTON
TAB - AMPLIVAR
-

SIZE CAGE CODE DRAWING NO RESTRICTED TO

A300779C-1814988

SCALE 2:1

SHEET 1 OF 1

REV A2