

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
AF	50


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	REVISED PER ECR–12–013518	24NOV12	KH	PD

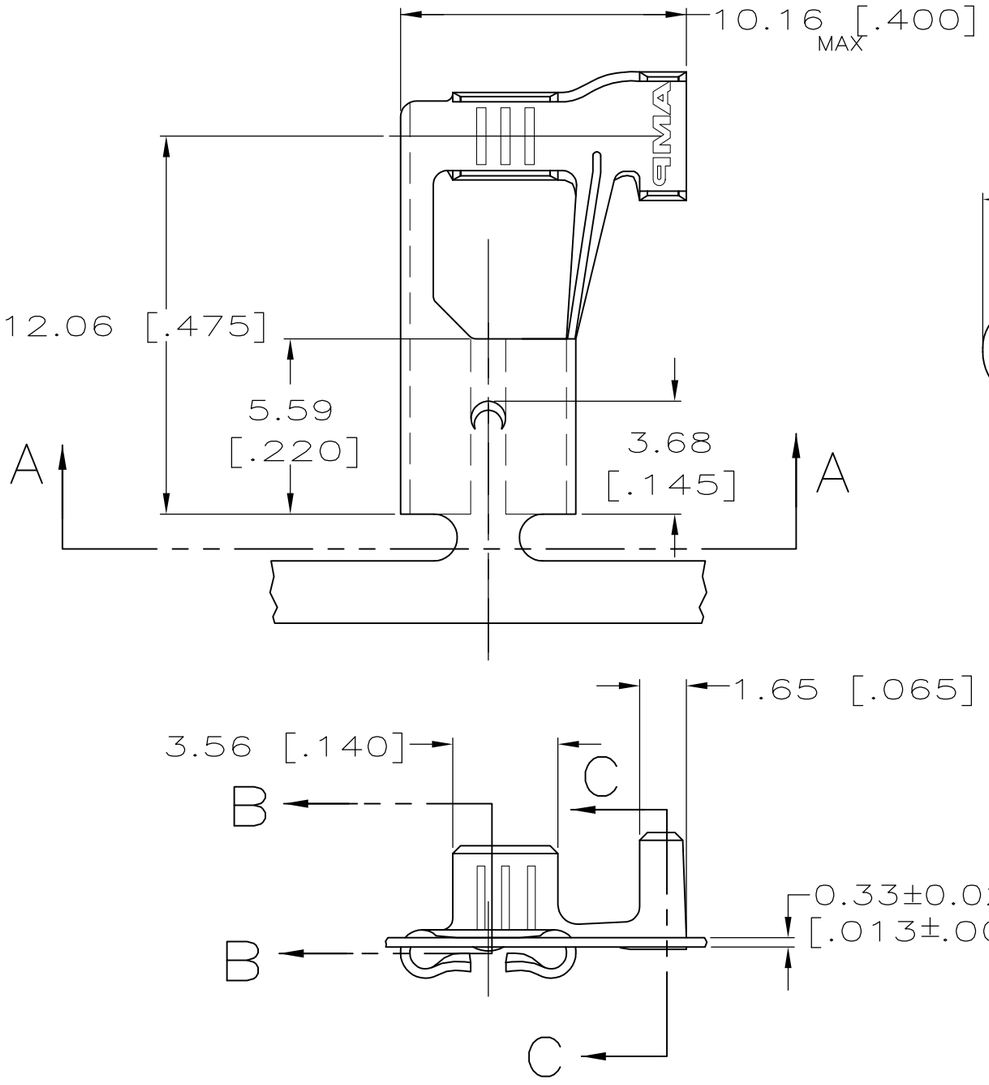


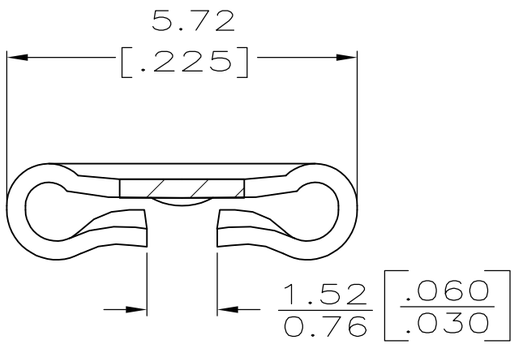

SECTION A–A
SCALE 10:1

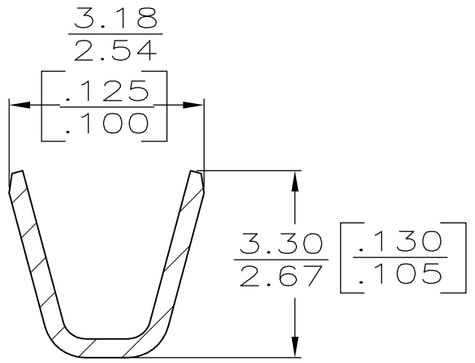

SECTION B–B
SCALE 10:1

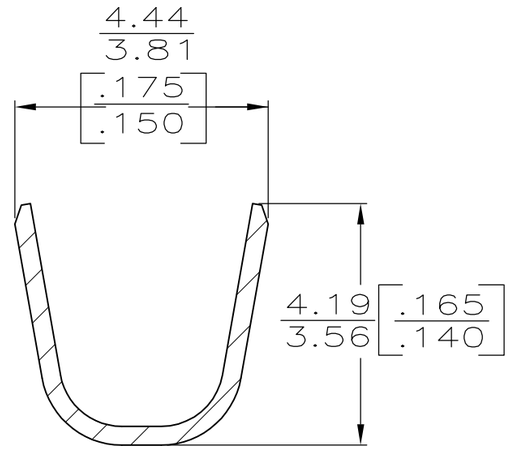

SECTION C–C
SCALE 10:1

1 CONTINUOUS STRIP ON REELS.

2 ACCEPTS [#20–#16] AWG.

3 INSULATION RANGE 2.28–3.30[.090–.130] DIA.

TIN	0.81±0.025 [.032±.001]	63848–2
–		63848–1
FINISH	MATING TAB THICKNESS	PART NO

F OR O	3.56 [.140]	4.78 [.188]	F	2.29 [.090]	1.34 [.053]	[#16]
					1.17 [.046]	[#18]
					1.04 [.041]	[#20]
TYPE	WIDTH	STRIP LENGTH ±0.38 [.015]	TYPE	WIDTH	±0.051 [.002] HEIGHT	WIRE
INSUL BARREL CRIMP		WIRE BARREL CRIMP				

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.25 [.010]
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL: BRASS

FINISH: SEE TABLE

DWN	JR RUTH	5/11/95
CHK	MS FEHER	5/11/95
APVD	P DESANTIS	5/11/95
PRODUCT SPEC	–	
APPLICATION SPEC	114–2079	
WEIGHT	–	
CUSTOMER DRAWING		

TE Connectivity

NAME: RECEPTACLE, FASTON, FLAG, 4.75 [.187] SERIES

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–63848	–

SCALE	SHEET	REV
5:1	1 OF 1	D