



LOC	DIST	REVISIONS					
AF	50	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B	REVISED PER ECR-13-011489	30NOV2013	KH	PD

SUGGESTED MATING TAB

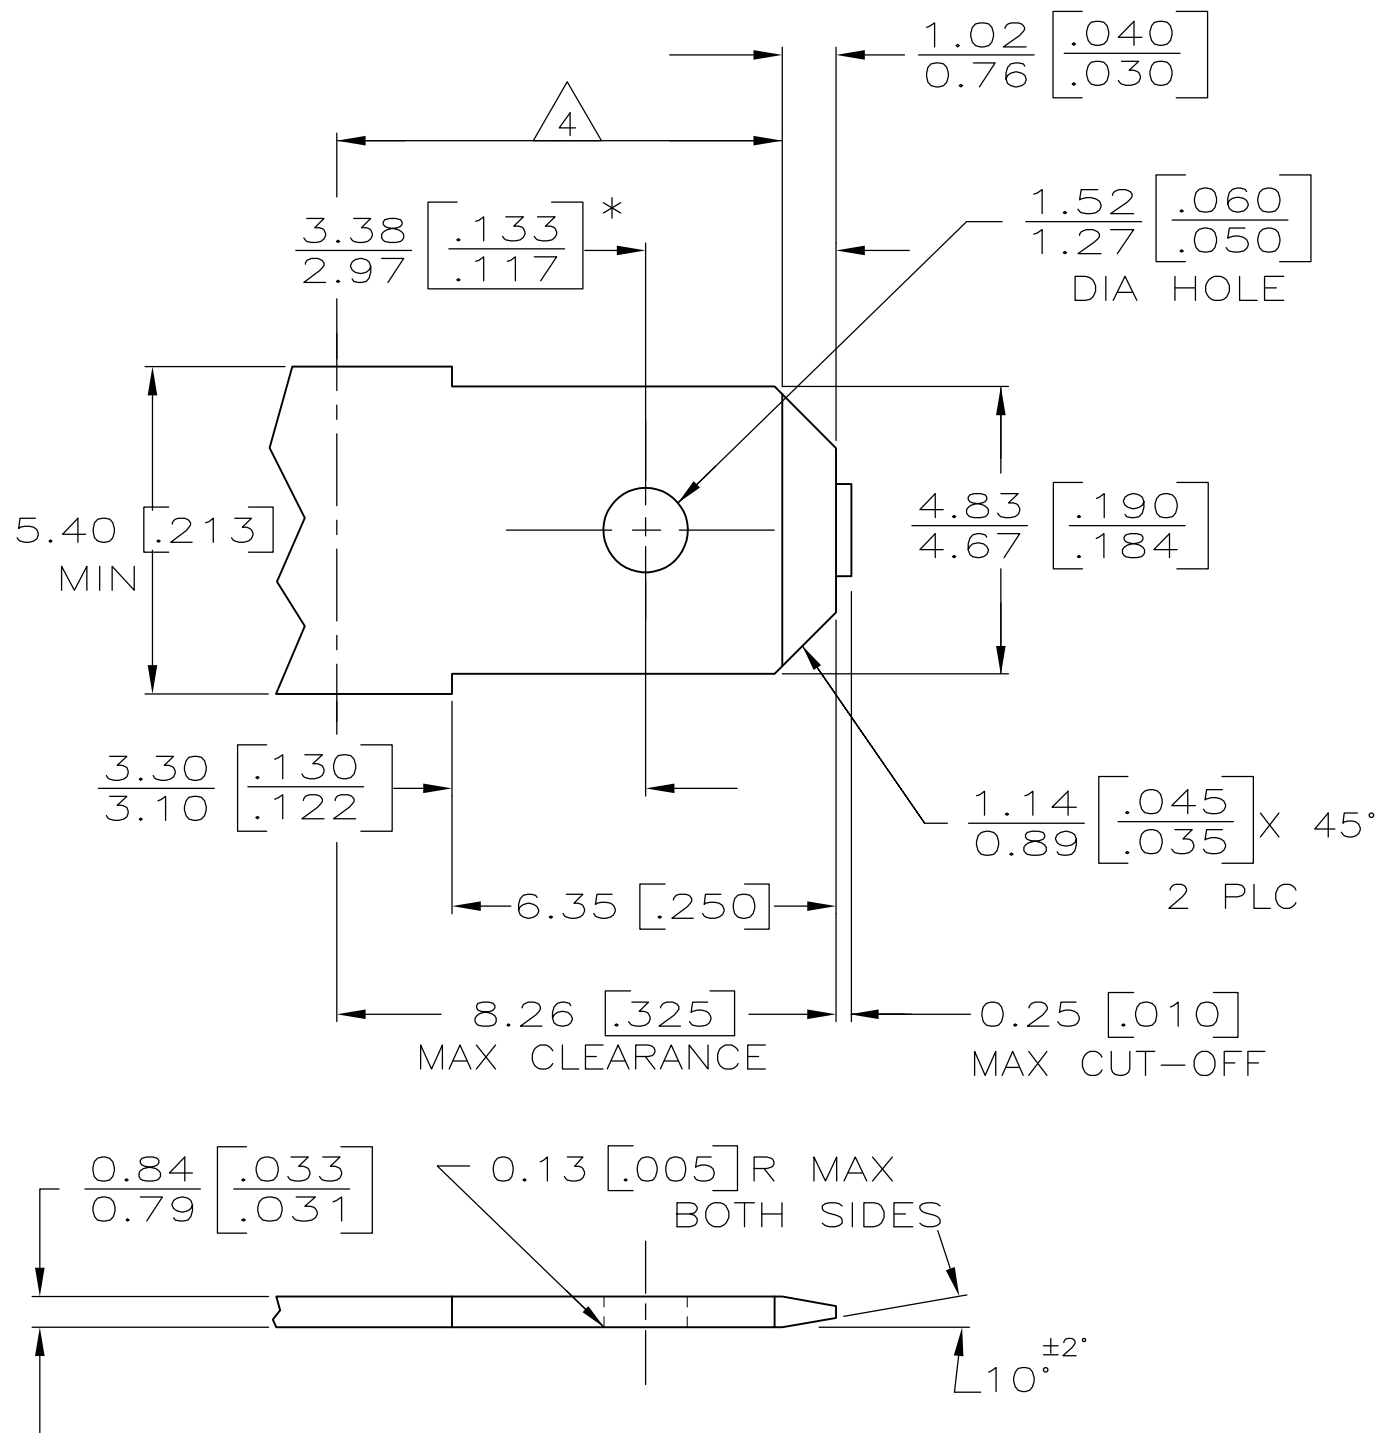

- MATL: #2 HARD BRASS OR NICKEL PLATED STEEL.
- NO BURRS PERMISSIBLE AT HOLE.
- TIN PLATING IS REQUIRED ON BRASS WHEN TERMINAL TEMPERTURE IS OVER 225° F.
- MUST BE FLAT WITHIN 0.076[.003] OVER THIS LENGTH.
- HOLE MUST BE SYMMETRICAL ABOUT TAB & WITHIN 0.076[.003].
- TO BE USED ONLY WHEN SHOULDER IS ELIMINATED.

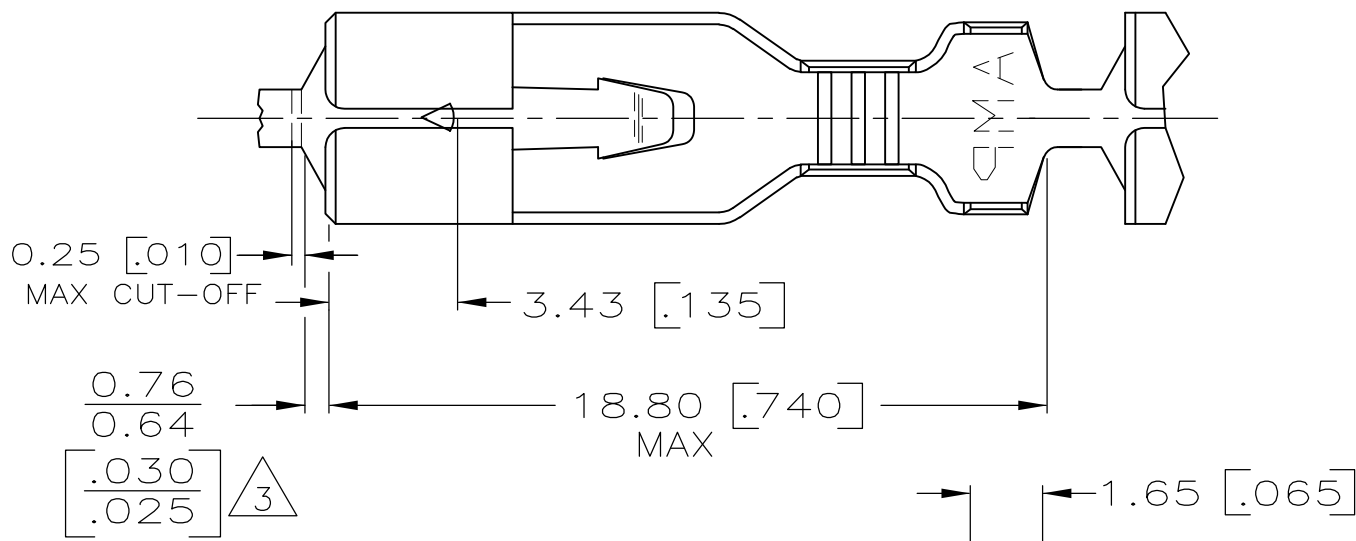

A
A

45° REF

B

C

B

C

SECTION B-B

SECTION C-C

VIEW A-A

RELEASE LATCH INEFFECTIVE

0.41 [0.016] / 0.25 [0.010]

5.59 [0.220] / 4.95 [0.195]

5.21 [0.205] / 4.57 [0.180]

5.59 [0.220] / 4.95 [0.195]

5.21 [0.205] / 4.57 [0.180]

5.59 [0.220] / 4.95 [0.195]

5.21 [0.205] / 4.57 [0.180]

5.59 [0.220] / 4.95 [0.195]

5.21 [0.205] / 4.57 [0.180]


5.59 [0.220] / 4.95 [0.195]

5.21 [0.205] / 4.57 [0.180]

5.59 [0.220] / 4.95 [0.195]

5.21 [0.205] / 4.57 [0.180]

5.59 [0.220] / 4.95 [0.195]

2.29 — 3.30 [.090 — .130]		0.5 — 1.4mm ² [20-16]		63520-1					
INSULATION RANGE		WIRE SIZE		PART NO					
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 3/27/90	 TE Connectivity						
		CHK G YETTER 3/27/90							
		APVD J GILLESPIE 3/27/90							
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME					
		PRODUCT SPEC		RECEPTACLE, POSITIVE LOCK, .187 SERIES					
		—							
		APPLICATION SPEC							
		—							
		—							
MATERIAL		FINISH		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
BRASS		TIN 0.002032 [.000080 MIN]		A2	00779	C-63520	—		
CUSTOMER DRAWING				SCALE	5:1	SHEET	1 of 1	REV	B