
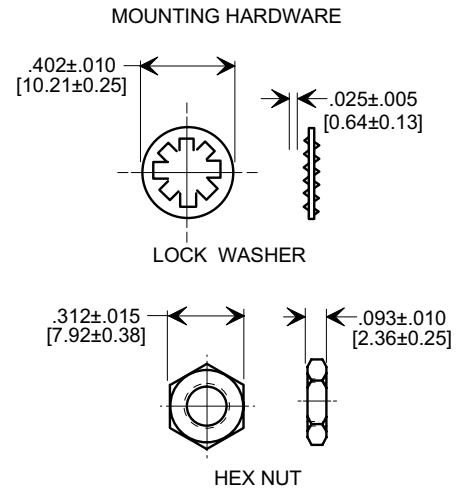
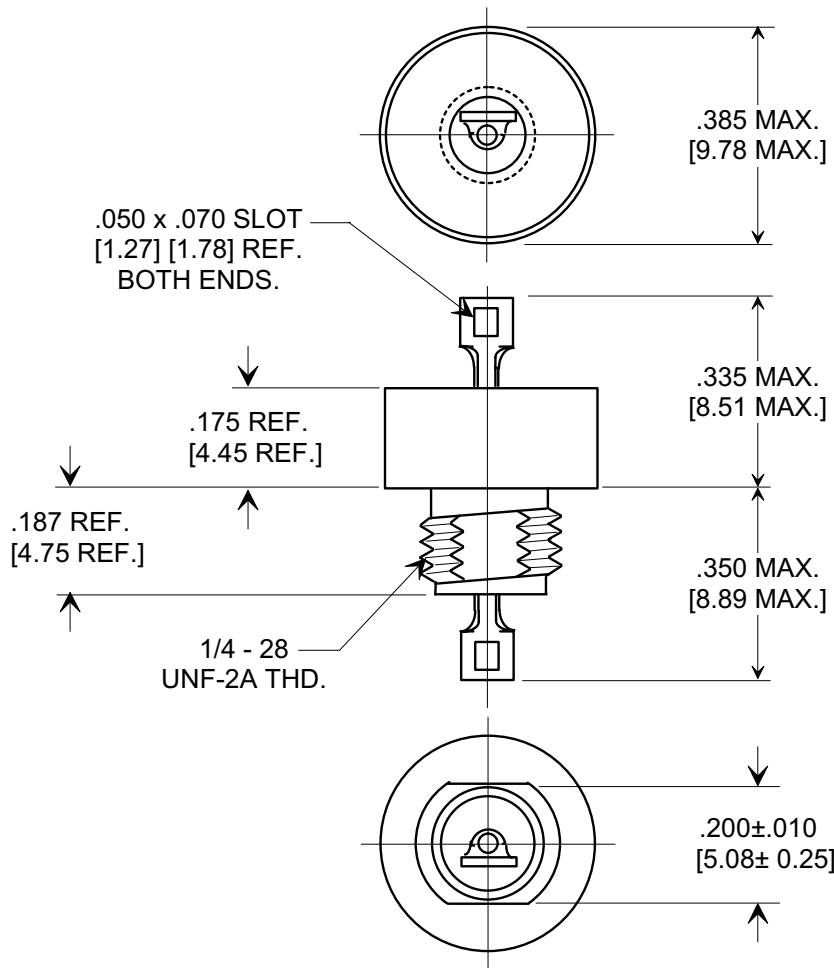



MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

Electrical Testing
 per Tusonix standard
 test plans and Mil-Std-202
 Test Methods.



NOTES:
 MATERIALS:
 BUSHING - TIN PLATED STEEL
 LEAD - SOLDER PLATED COPPER
 NUT - TIN PLATED BRASS
 L'WASHER - TIN PLATED PHOSPHOR BRONZE
 MOUNTING TORQUE: 8 lb - ins. max
 SEAL TESTED PER MIL-STD-202
 METHOD 112 CONDITION A.
 DCR - .01Ω max.
 MAX. SOLDER TEMPERATURE 500°F

MIN. CAP. (μF)	I.R. MIN. @ 100 (VDC.)	DWV (VDC)	WORKING VOLTAGE DC		CURRENT D.C.	MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220					
			85°C	125°C		30 KHz	100 KHz	300 KHz	1 MHz	10 MHz	1 GHz
1.4	500 M Ω	250	100	50	15 A	15	25	34	44	60	70

X-2015 Rev-0 REVISION RECORD	0	Original Release C.O.
	5	RDN TO COMP FMP. STYLE DWG SPLIT FOR EACH VAR. S.M. 06-20-02
	2002	TABLE REVISED 50 WVDC @ 125° WAS 70WVDC @ 125° L.E. 01-17-03
	6	20030106-1-10
	7	ADDED IR & DWV. SM 03-06-03
		20030304-2-13
--TOLERANCES-- Unless Otherwise Specified		Title COAXIAL BROADBAND - "L" HERMETICALLY SEALED
DECIMAL ± // //		
ANGLES ± // //		Drawn S.M. 06-20-02 Scale X 3
TUSONIX TUCSON, ARIZONA		Approved J.Mc 06-20-02
A		4601-053