


CD54/74HC27
CD54/74HCT27

File Number 1648

T-43-21-00

High-Speed CMOS Logic



Triple 3-Input NOR Gate

Type Features:

- Buffered Inputs
- Typical CD54/74HC27 Propagation Delay = 7ns
@ $V_{CC} = 5V, C_L = 15pF, T_A = 25^\circ C$


FUNCTIONAL DIAGRAM AND TERMINAL ASSIGNMENT

The RCA-CD54/74HC27 and CD54/74HCT27 logic gates utilize silicon-gate CMOS technology to achieve operating speeds similar to LSTTL gates with the low power consumption of standard CMOS integrated circuits. All devices have the ability to drive 10 LSTTL loads. The CD54/74HCT logic family is functionally as well as pin compatible with the standard 54LS/74LS logic family.

The CD54HC27 and CD54HCT27 are supplied in 14-lead hermetic dual-in-line ceramic packages (F suffix). The CD74HC27 and CD74HCT27 are supplied in 14-lead dual-in-line plastic packages (E suffix) and in 14-lead dual-in-line surface mount plastic packages (M suffix). Both types are also available in chip form (H suffix).

Family Features:

- Fanout (Over Temperature Range):
Standard Outputs - 10 LSTTL Loads
Bus Driver Outputs - 15 LSTTL Loads
- Wide Operating Temperature Range:
CD74HC/HCT: -40 to $+85^\circ C$
- Balanced Propagation Delay and Transition Times
- Significant Power Reduction Compared to LSTTL Logic ICs
- Alternate Source is Philips/Sigmetics
- CD54HC/CD74HC Types:
2 to 6 V Operation
High Noise Immunity: $N_{IL} = 30\%, N_{IH} = 30\%$
of V_{CC} , @ $V_{CC} = 5V$
- CD54HCT/CD74HCT Types:
4.5 to 5.5 V Operation
Direct LSTTL Input Logic Compatibility
 $V_{IL} = 0.8V$ Max., $V_{IH} = 2V$ Min.
CMOS Input Compatibility
 $I_i \leq 1 \mu A$ @ V_{OL}, V_{OH}



92CS-38425

LOGIC DIAGRAM

TRUTH TABLE

nA	nB	nC	nY
L	L	L	H
L	L	H	L
L	H	L	L
H	L	L	L
H	H	L	L
L	H	H	L
H	L	H	L
H	H	H	L

92CS-38425

L = Low Level
H = High Level

CD54/74HC27
CD54/74HCT27

T-43-21

MAXIMUM RATINGS, Absolute-Maximum Values:

DC SUPPLY-VOLTAGE, (V _{CC}):	
(Voltages referenced to ground)	
DC INPUT DIODE CURRENT, I _{IK} (FOR V _i < -0.5 V OR V _i > V _{CC} + 0.5V)	-0.5 to + 7 V
DC OUTPUT DIODE CURRENT, I _{OK} (FOR V _o < -0.5 V OR V _o > V _{CC} + 0.5V)	±20mA
DC DRAIN CURRENT, PER OUTPUT (I _o) (FOR -0.5 V < V _o < V _{CC} + 0.5V)	±20mA
DC V _{CC} OR GROUND CURRENT (I _{CC})	±25mA
POWER DISSIPATION PER PACKAGE (P _o):	±50mA
For T _A = -40 to +60° C (PACKAGE TYPE E)	500 mW
For T _A = +60 to +85° C (PACKAGE TYPE E)	Derate Linearly at 8 mW/°C to 300 mW
For T _A = -55 to +100° C (PACKAGE TYPE F, H)	500 mW
For T _A = +100 to +125° C (PACKAGE TYPE F, H)	Derate Linearly at 8 mW/°C to 300 mW
For T _A = -40 to +70° C (PACKAGE TYPE M)	400 mW
For T _A = +70 to +125° C (PACKAGE TYPE M)	Derate Linearly at 6 mW/°C to 70 mW
OPERATING-TEMPERATURE RANGE (T _A):	
PACKAGE TYPE F, H	-55 to +125° C
PACKAGE TYPE E, M	-40 to +85° C
STORAGE TEMPERATURE (T _{stg})	-65 to +150° C
LEAD TEMPERATURE (DURING SOLDERING):	
At distance 1/16 ± 1/32 in. (1.59 ± 0.79 mm) from case for 10 s max.	+265° C
Unit inserted into a PC Board (min. thickness 1/16 in., 1.59 mm)	
with solder contacting lead tips only	+300° C



RECOMMENDED OPERATING CONDITIONS:

For maximum reliability, nominal operating conditions should be selected so that operation is always within the following ranges:

CHARACTERISTIC	LIMITS		UNITS
	MIN.	MAX.	
Supply-Voltage Range (For T _A = Full Package-Temperature Range) V _{CC} .*			
CD54/74HC Types	2	6	V
CD54/74HCT Types	4.5	5.5	V
DC Input or Output Voltage V _i , V _o	0	V _{CC}	V
Operating Temperature T _A :			
CD74 Types	-40	+85	°C
CD54 Types	-55	+125	°C
Input Rise and Fall Times t _r , t _f			
at 2 V	0	1000	ns
at 4.5 V	0	500	ns
at 6 V	0	400	ns

*Unless otherwise specified, all voltages are referenced to Ground.

CD54/74HC27
CD54/74HCT27


SWITCHING CHARACTERISTICS ($V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{ C}$, Input $t_r = t_f = 6\text{ ns}$)

CHARACTERISTIC	C_L (pF)	SYMBOL	TYPICAL		UNITS
			HC	HCT	
Propagation Delay, Data Input to Output Y (Fig. 1)	15	t_{PLH} t_{PHL}	7	9	ns
Power Dissipation Capacitance*	—	C_{PD}	26	28	pF

* C_{PD} is used to determine the dynamic power consumption, per gate.
 $PD = V_{CC}^2 f_i (C_{PD} + C_L)$
 f_i = input frequency
 C_L = output load capacitance
 V_{CC} = supply voltage

SWITCHING CHARACTERISTICS ($C_L = 50\text{ pF}$, Input $t_r = t_f = 6\text{ ns}$)

CHARACTERISTIC	SYMBOL	V_{CC}	25° C				-40° C to +85° C				-55° C to +125° C				UNITS
			HC		HCT		74HC		74HCT		54HC		54HCT		
			Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
Propagation Delay, Input to Output (Fig. 1)	t_{PLH}	2		95		—		120		—		145		—	ns
	t_{PHL}	4.5		19		23		24		29		29		35	
		6		16		—		20		—		25		—	
Transition Times (Fig. 1)	t_{TLH}	2		75		—		95		—		110		—	ns
	t_{THL}	4.5		15		15		19		19		22		22	
		6		13		—		16		—		19		—	
Input Capacitance	C_i		—	10		10		10		10		10		10	pF

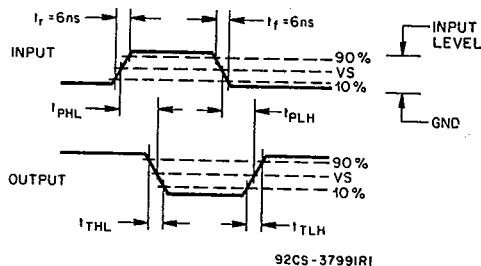

	54/74HC	54/74HCT
Input Level	V_{CC}	3V
Switching Voltage, V_s	50% V_{CC}	1.3 V

Fig. 1 - Transition times and propagation delay times.

HARRIS SEMICONDUCTOR 27E D 4302271 0017498 6 HAS