


# VIP-2/SC/2FLK14/AB-1756

Order No.: 2322333

The figure shows a version with SIEMENS labeling

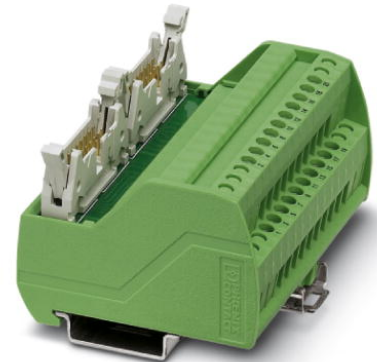

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2322333>

VARIOFACE COMPACT LINE, interface module for Allen-Bradley Controll-Logix, with Controll-Logix-specific labeling, no. of positions: 2 x 14, module width: 98 mm



## Commercial data

GTIN (EAN)	4046356451734
sales group	I550
Pack	1 pcs.
Customs tariff	85369010
Weight/Piece	0.1674 KG
Catalog page information	Page 232 (IF-2009)

## Product notes

WEEE/RoHS-compliant since:  
06/03/2009



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

### General data

Nominal voltage $U_N$	60 V AC/DC
Max. current carrying capacity per branch	1 A
Max. total current of voltage supply	max. 3 A (/Byte)
Number of positions	14

Width	80.6 mm
Height	65.5 mm
Depth	56 mm
Status display	No
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any
Standards/regulations	IEC 60664
	DIN VDE 0109-11
Pollution degree	2
Surge voltage category	II

#### Connection data

Connection 1	Field level
Type of connection	Spring-cage connection
Number of positions	14
Conductor cross section solid min.	0.14 mm <sup>2</sup>
Conductor cross section solid max.	1.5 mm <sup>2</sup>
Conductor cross section stranded min.	0.14 mm <sup>2</sup>
Conductor cross section stranded max.	1.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	14
Stripping length	6 mm
Connection 2	Control system level
Number of connections	2
Type of connection	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of positions	14

#### Certificates / Approvals



Certification CUL, UL

#### CUL

Nominal voltage U <sub>N</sub>	125 V
--------------------------------	-------


Nominal current $I_N$	1 A
AWG/kcmil	30-12

**UL**

Nominal voltage $U_N$	125 V
Nominal current $I_N$	1 A
AWG/kcmil	30-12

**Diagrams/Drawings**

Circuit diagram

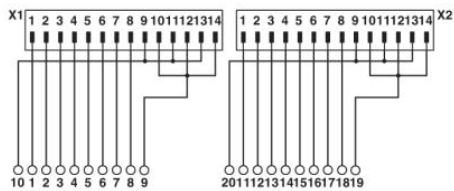

VIP-2/SC/2FLK14/AB-1756 connection scheme

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;