

# VIP-3/SC/HD44SUB/M

Order No.: 2322388



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2322388>

VARIOFACE module, with screw connection and high density D-Subminiature male connector, for mounting on NS 32 or NS 35/7.5, no. of pos.: 44, width: 135 mm



Commercial data	
GTIN (EAN)	4046356451680
sales group	I501
Pack	1 pcs.
Customs tariff	85369010
Weight/Piece	0.2146 KG
Catalog page information	Page 289 (IF-2009)

## Product notes

WEEE/RoHS-compliant since:  
06/03/2009



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

General data	
Nominal voltage $U_N$	125 V
Max. current carrying capacity per branch	1 A
Number of positions	44
Width	82.9 mm

Height	69 mm
Depth	62 mm
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any

#### Connection data

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Screw connection
Number of positions	44
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3
Connection 2	D-SUB connection
Type of connection	Pluggable

#### Certificates / Approvals



Certification CUL, UL

#### CUL


Nominal voltage $U_N$	125 V
Nominal current $I_N$	1 A
AWG/kcmil	30-12

#### UL


Nominal voltage $U_N$	125 V
Nominal current $I_N$	1 A
AWG/kcmil	30-12

**Diagrams/Drawings**

Circuit diagram

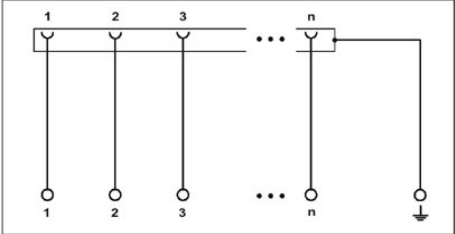

Schematic diagram

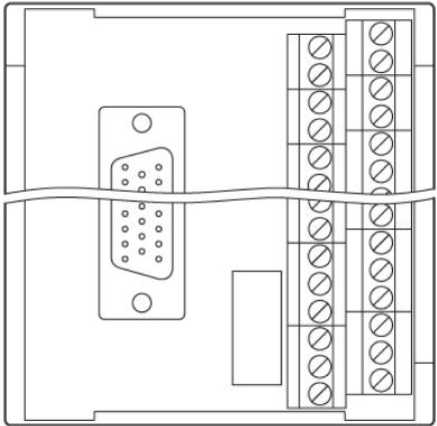

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;