

Coaxial Bandpass Filter

VBFZ-2000-S+

50Ω 1730 to 2270 MHz

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	7W at 25°C

*Passband rating, derate linearly to 3W at 100°C ambient. Permanent damage may occur if any of these limits are exceeded.

Features

- Good Rejection, 30dB up to 16GHz
- Low insertion loss
- Excellent power handling, 7W
- Temperature stable LTCC internal structure
- Rugged stainless steel unibody
- Protected by US Patent 6,943,646

Applications

- Harmonic rejection
- Transmitters/receivers
- Lab use
- Test instrumentation




Generic photo used for illustration purposes only
CASE STYLE: FF1145

Connectors	Model
SMA	VBFZ-2000-S+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Outline Drawing

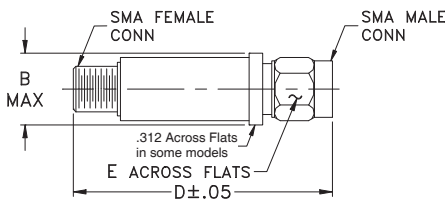

Outline Dimensions (inch mm)


B	D	E	wt.
.410	1.91	.312	grams
10.41	48.51	7.92	11.8

Note: Please refer to case style drawing for details


Bandpass Filter Electrical Specifications (T_{AMB} = 25°C)

CENTER FREQ. (MHz) Fc	PASSBAND (MHz) (Loss < 2.3dB) F1 - F2	STOPBANDS (MHz)				VSWR (:1)		
		(Loss > 20dB)		(Loss 30dB Typ)		Passband		Stopband
		F3	F4	F5	F6	Typ.	Max.	Typ.
2000	1730 - 2270	1210	2960	1200	2960 - 16000	1.6	2.4	20

Typical Frequency Response

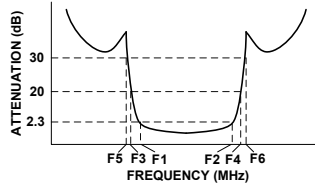


Functional Schematic

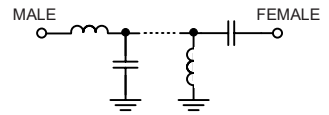


Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
50	79.14	18637.82
250	68.15	1353.31
1200	33.44	38.13
1210	32.29	36.51
1360	16.33	14.94
1461	6.99	4.47
1530	3.28	1.87
1730	1.63	1.56
2000	1.37	1.42
2270	1.80	1.72
2556	3.93	1.89
2635	8.17	3.61
2720	16.45	5.44
2800	27.89	6.30
2850	37.66	6.86
2960	48.75	9.06
5000	39.36	40.30
10000	37.29	15.72
13000	42.80	1.31
16000	51.77	20.73

VBFZ-2000-S+
INSERTION LOSS

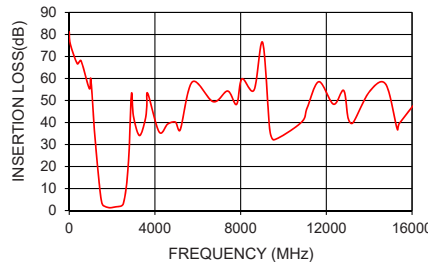

VBFZ-2000-S+
VSWR

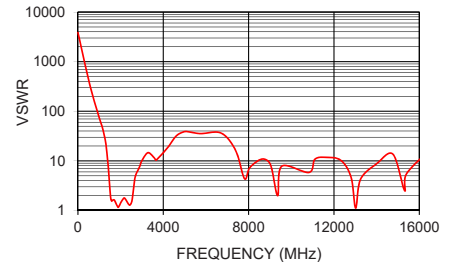

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

